

COLOLIGHT

B0D8HYRB5L

Colo Play

Ultimate All In

One Studio

Controller



COLOLIGHT B0D8HYRB5L Colo Play Ultimate All In One Studio Controller User Manual

[Home](#) » [Cololight](#) » COLOLIGHT B0D8HYRB5L Colo Play Ultimate All In One Studio Controller User Manual 

Contents

- [1 COLOLIGHT B0D8HYRB5L Colo Play Ultimate All In One Studio Controller](#)
- [2 Specifications](#)
- [3 FAQs](#)
- [4 Installation](#)
- [5 Introduction](#)
- [6 PC Switch WOL \(Wake on Lan\) Start Tutorial](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

COLOLIGHT

COLOLIGHT B0D8HYRB5L Colo Play Ultimate All In One Studio Controller



Specifications

- **Brand:** COLO PLAY
- **Manufacturer:** HANGZHOU LIFESMART TECHNOLOGY CO., LTD.
- **Product Name:** COLO PLAY
- **Website:** www.cololight.com.


FAQs

- **Q: Where can I find additional support or troubleshooting information?**
 - **A:** For additional support or troubleshooting, visit the official website at www.cololight.com or refer to the user manual provided with your COLO PLAY device.


Installation

Basic Setting

1. Connect COLO PLAY to the host using the cable provided in the package, ensuring that the host is powered on.
2. Download the PC client from: <https://cololight.com/pages/coloplay-desktop-download>.

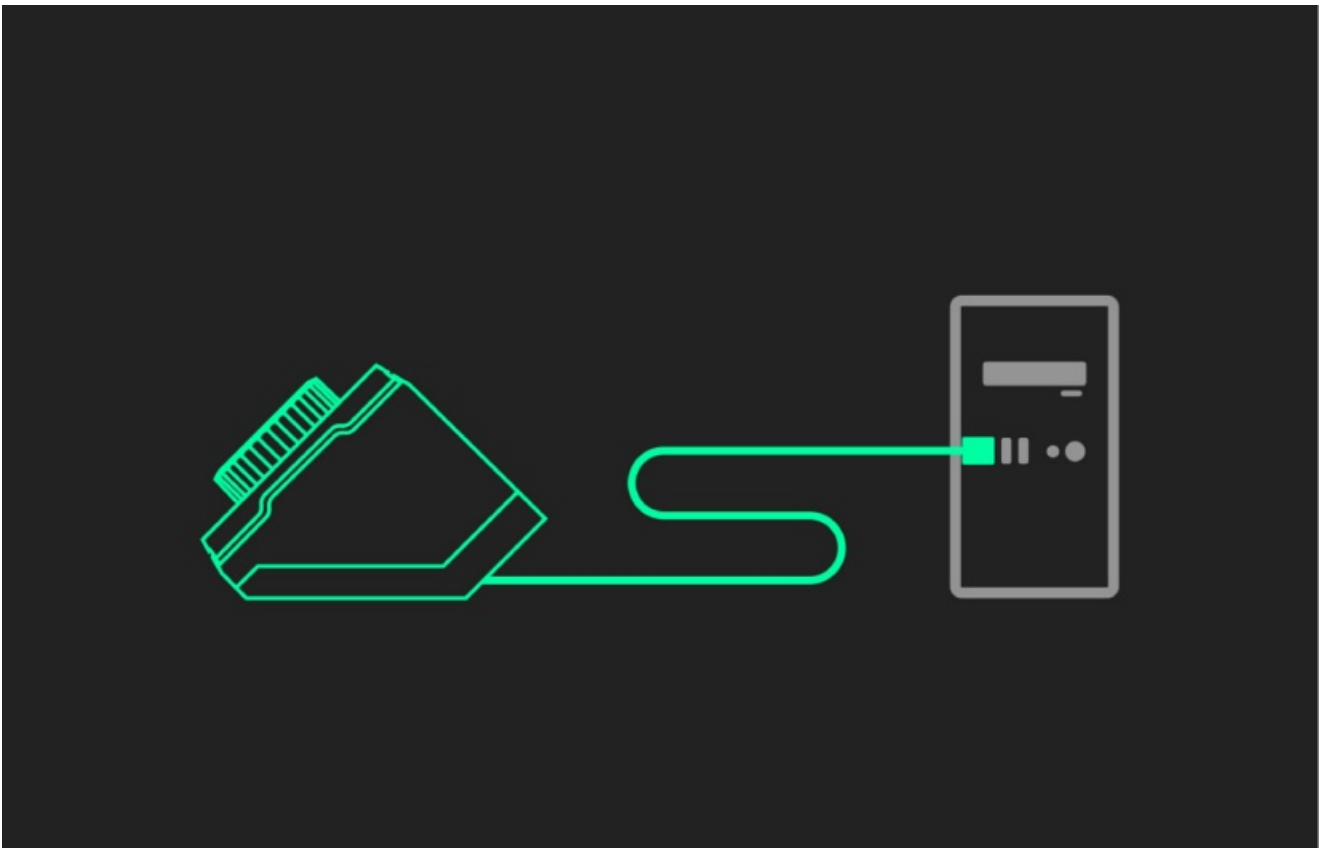

Version Updates

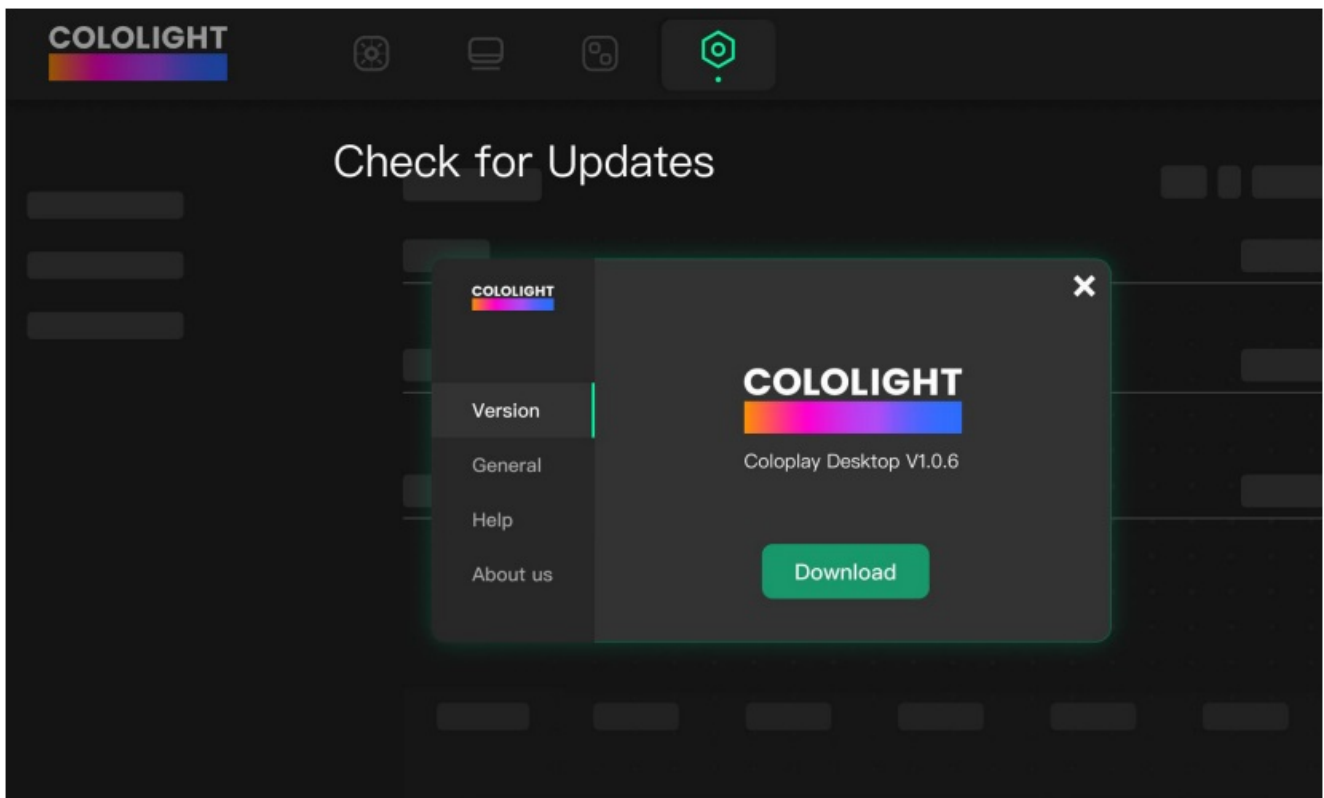

Introduction

Mode Introduction

1. Super Saiyan Mode:

- Integrates screen saver, small keyboard, and one-click boot functions into one, reducing page switching through a new interactive logic, and concentrating more operations on a single page.

2. Streaming Mode:


- Enhance your live experience with a unified platform for YouTube, Twitch, and OBS, streamlining your broadcast management across multiple channels.

3. YouTube mode:

- This mode is designed only for YouTube streaming. Stream smarter with our exclusive feature, crafted for YouTube creators. Manage broadcasts and engage with viewers effortlessly.

4. Default Mode:


- No function integration, or immersive experience in each independent application.

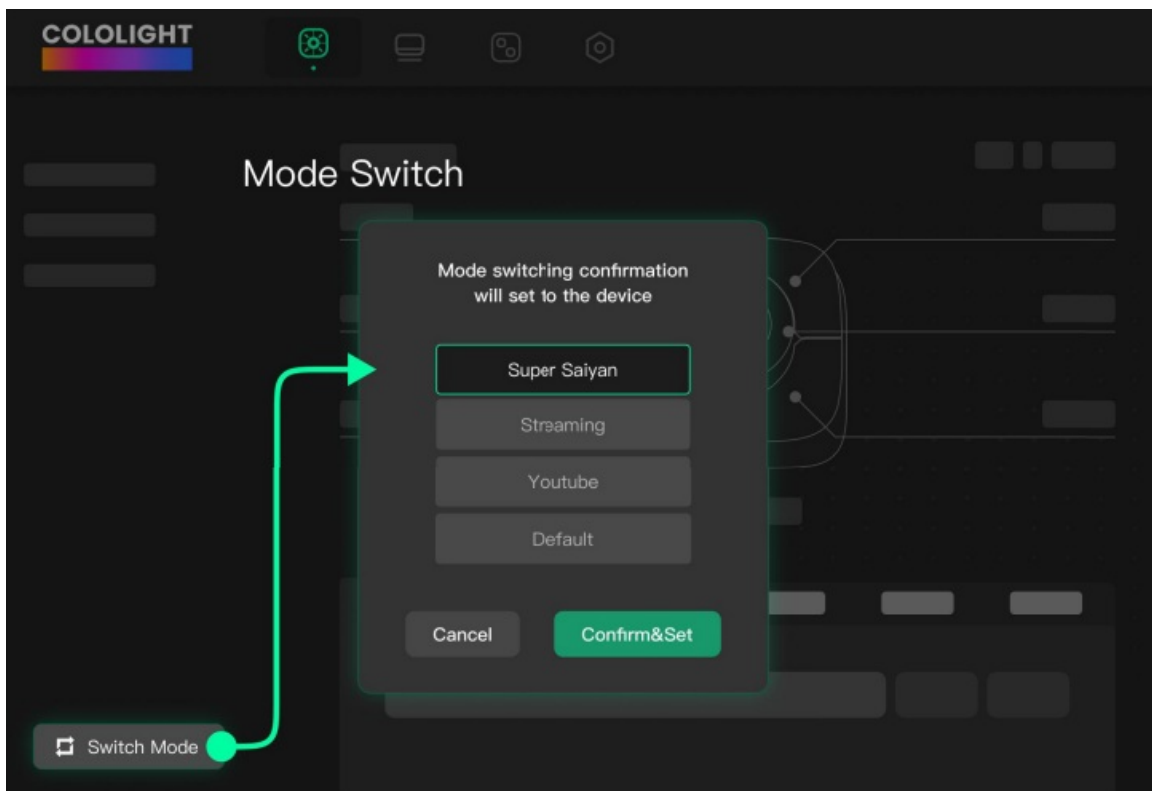

Operation Introduction

[Super Saiyan Mode] operation logic is as follows:

1. Super Saiyan Home Page [Short press the knob] to switch layers.
2. Home Page [Short press the button] to enter the application corresponding to the button.
3. Application Page [Long press the top left] to return to the home page.

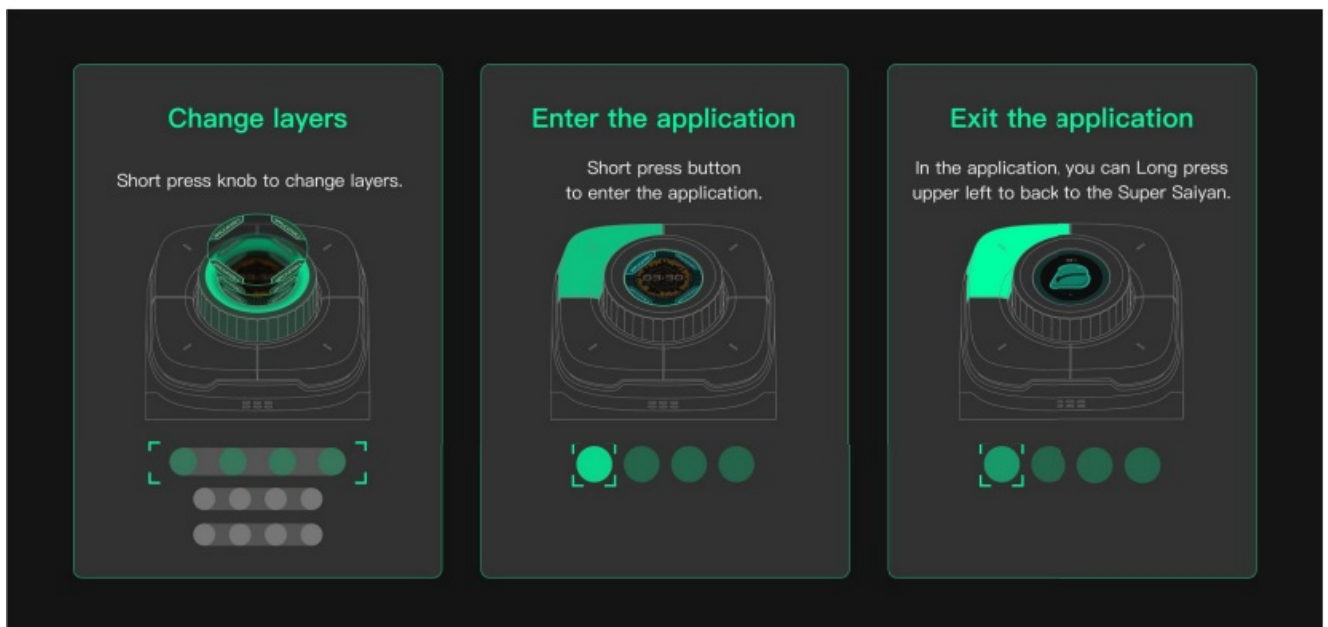


[Super Saiyan mode] Highlight features:


1. [Long press knob] to achieve the PC Switch function.




2. [Shortcut Key Configuration] In the shortcut key function bar, there are button recording, media keys, recommended shortcut keys, start programs, start web pages, local applications, and other editing functions.

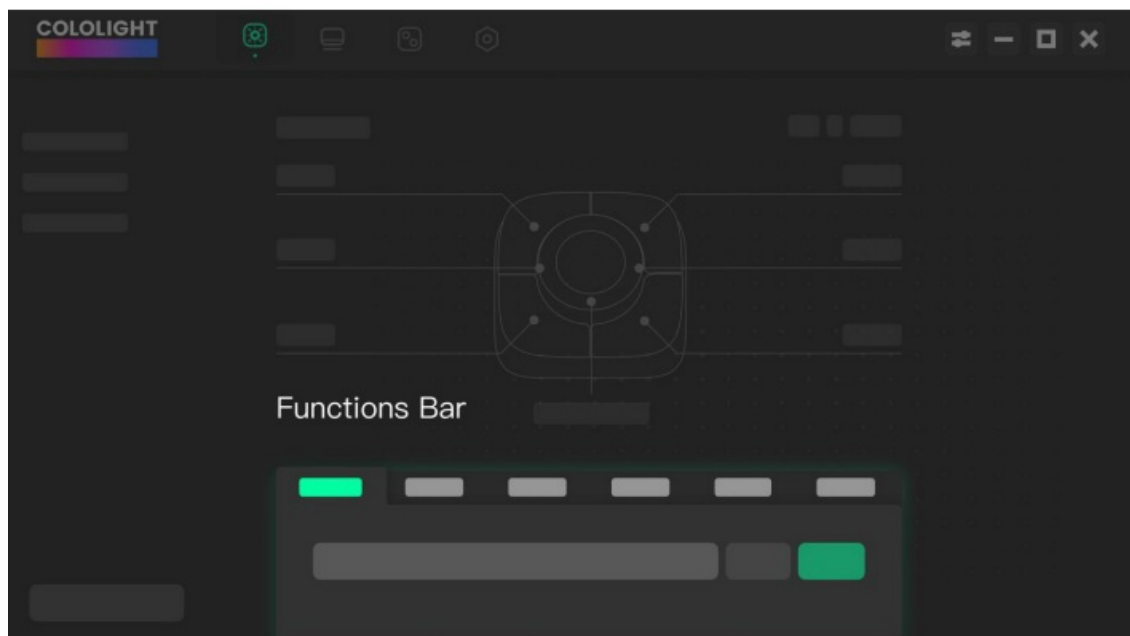

3. [Command Dial] An additional cool expansion desktop 7-key.

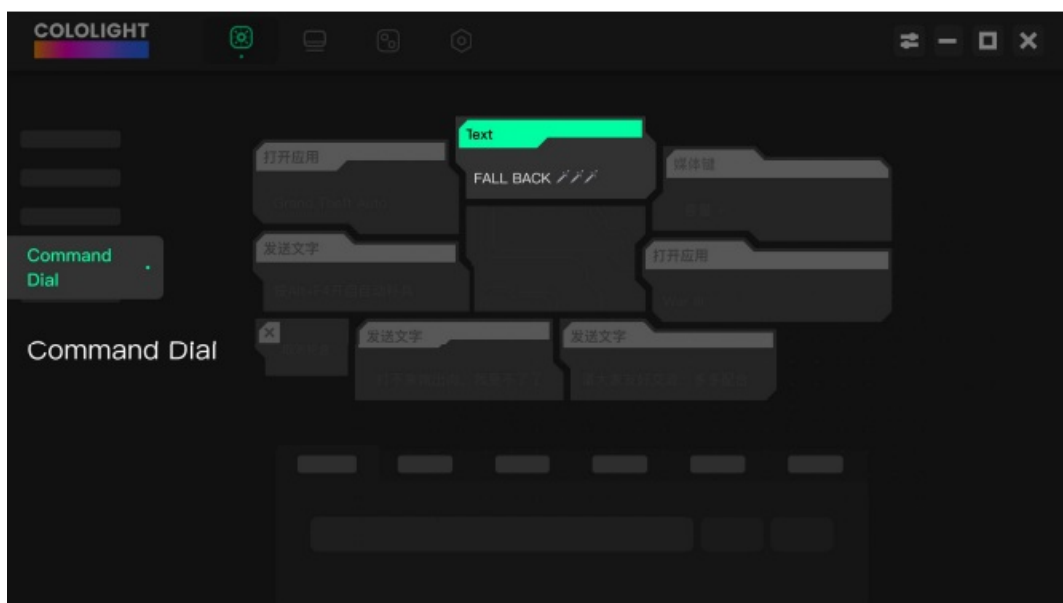


4. [Custom Screen Saver] Switch to the Super Saiyan theme or upload a favorite screen saver.

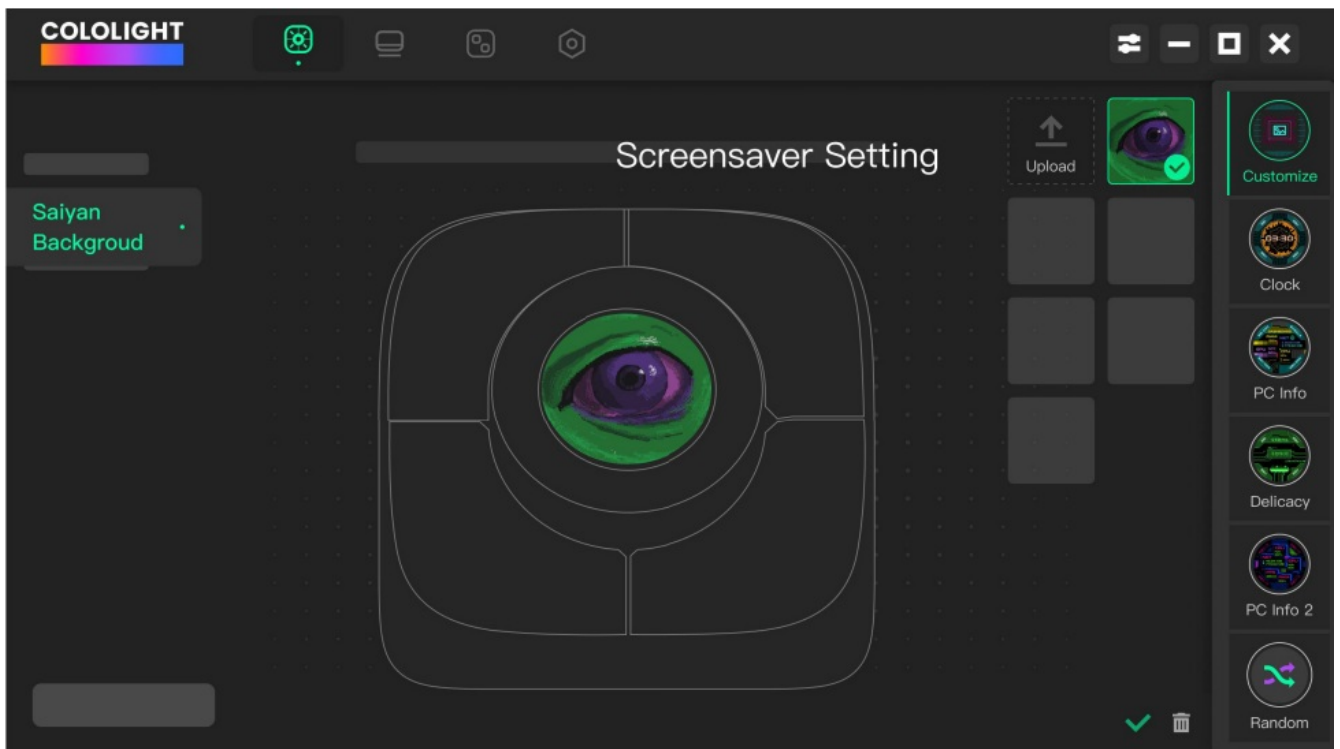


[Streaming Mode] operation logic is as follows:

1. Login to your accounts.
- 2.

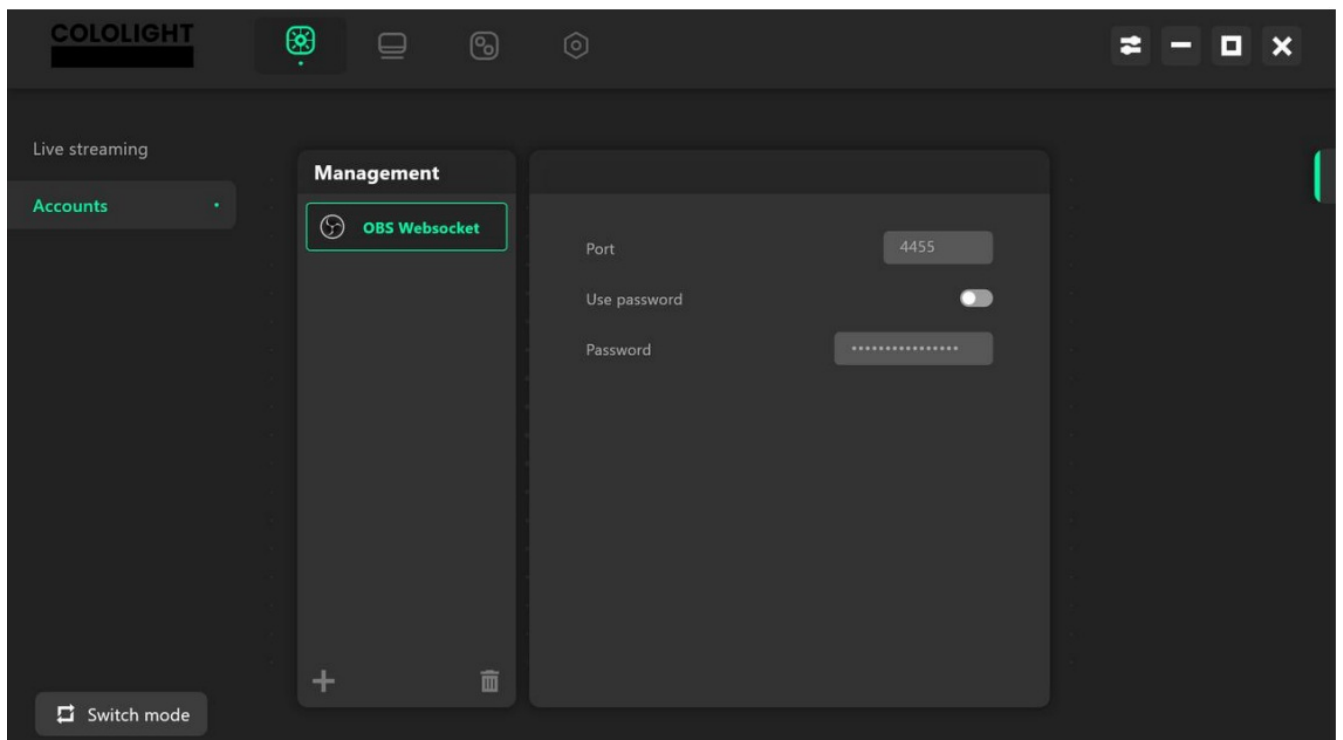

Configure each button.

3. [short press knob] to change the layers.

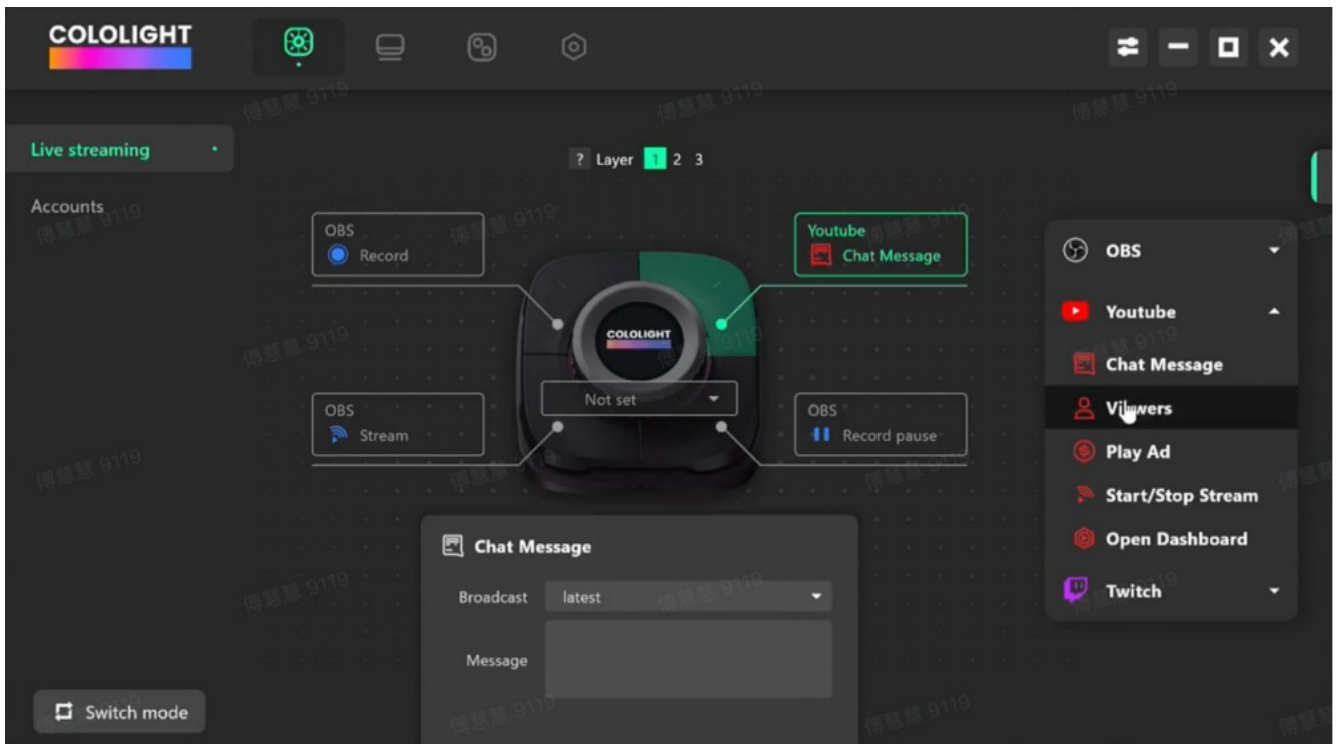

[Basic mode] Control method:

1. Exit the application:




- Long press the top-left button to exit the application.

2. Switch applications:

- Turn the knob to switch between the applications.


3. Enter the application:

- Short-press the knob to enter the application.

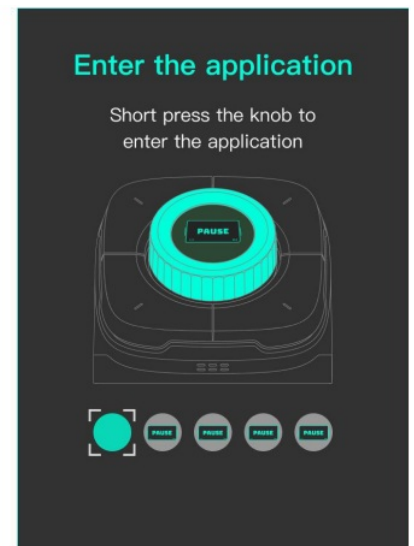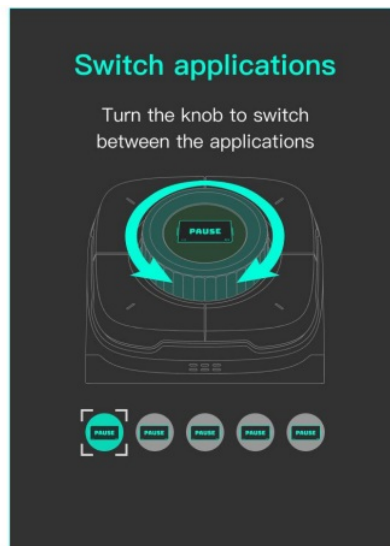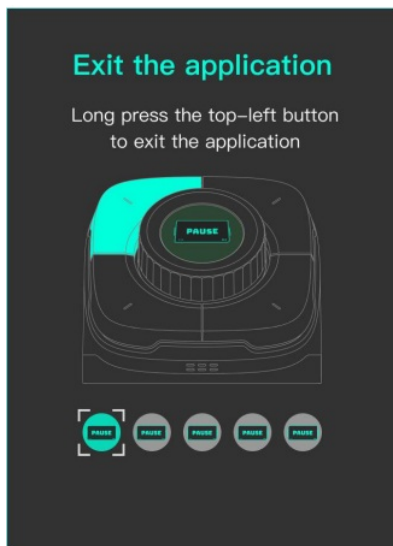


4. Application Download and Configuration:

- Download and install the application on the PC, then select a button to configure the application.

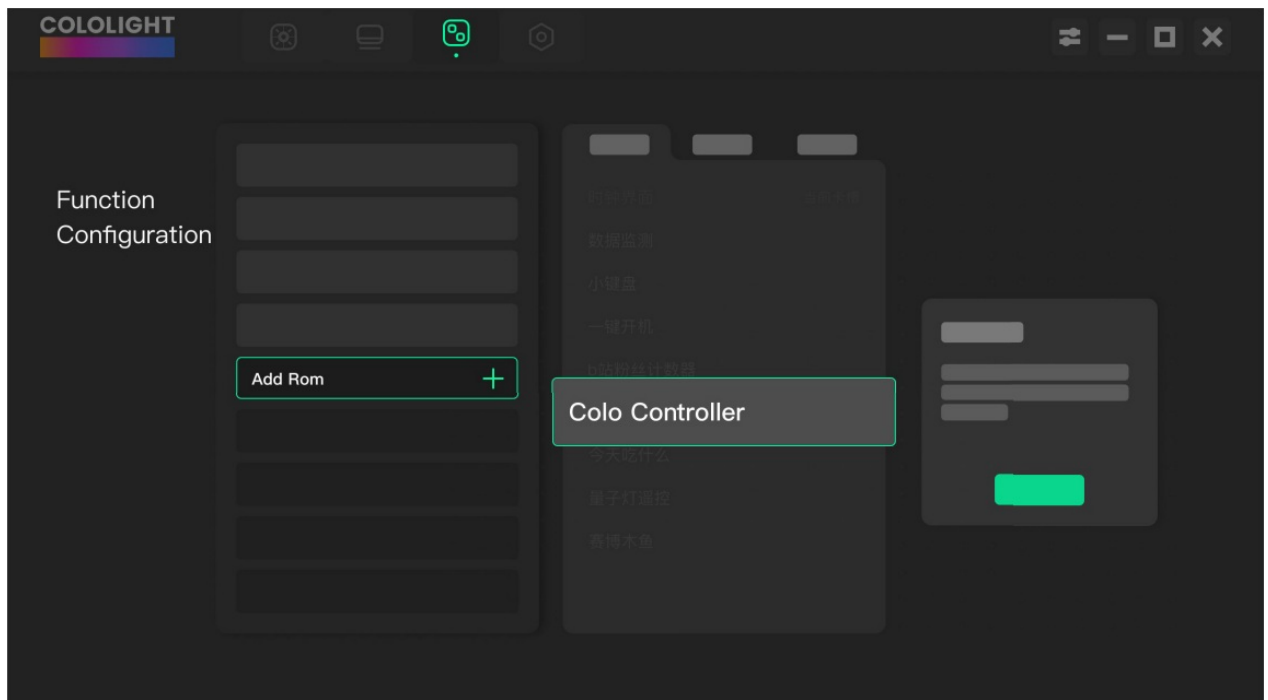



PC Switch

1. PC Switch WoL (Wake on Lan) Start Tutorial The motherboard needs to support the WoL function, and this function should be enabled in the BIOS interface. If you use the USB port of the PC for power supply, you need to set the USB port on the PC for continuous power supply.
2. COLO PLAY is connected to the same Wi-Fi as the PC, and there is no firewall or any settings blocking the network connection between them.
3. Select the [COLO PLAY Desktop >> PC INFO>>Network adapter] to view the network card information and configure the MAC address of the PC Switch.

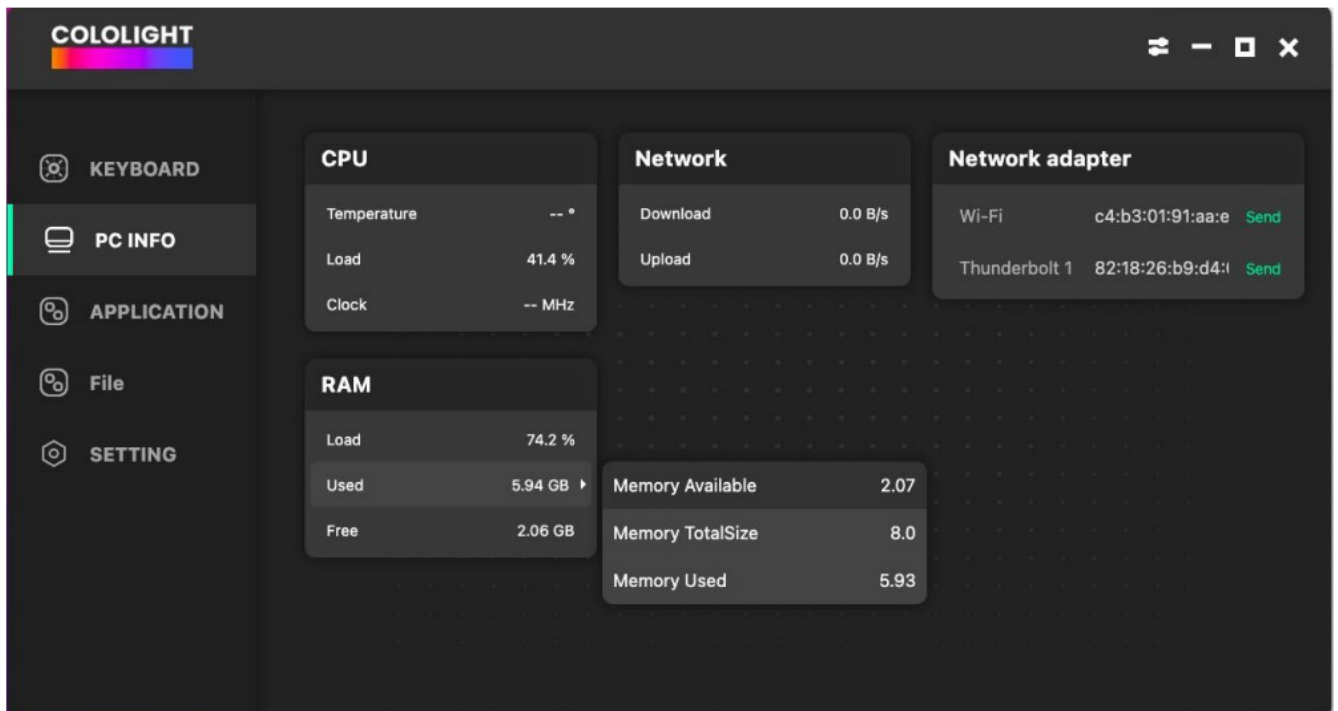

4. Or [Short press bottom left] Enter the MAC address of the host computer.
5. After completing the Wake-on-LAN (WoL) configuration, press and hold the knob to achieve a one-touch boot.
6. [Short press the "function button"] on the back of the device to [select color light on enable]. You can choose to turn on the quantum light when booting up.

7. [Long press upper left] to return from any interface.

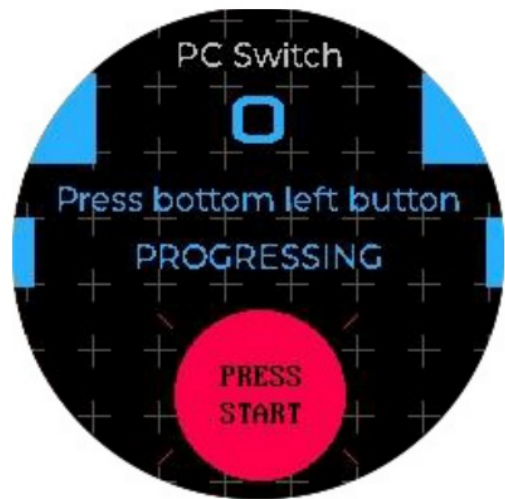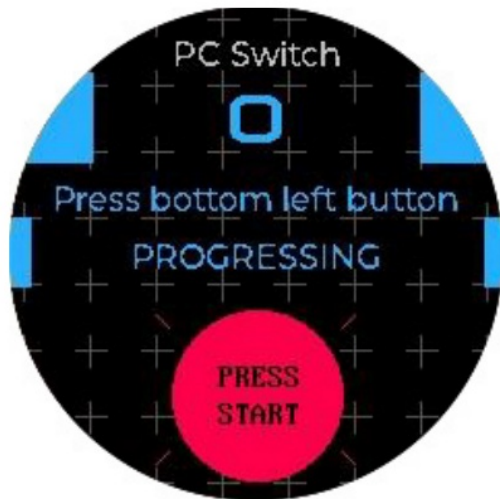

PC Switch WOL (Wake on Lan) Start Tutorial

COLO PLAY PC switch relies on WoL (Wake on Lan) technology to achieve one-key startup of the PC

1. A PC motherboard is required to support the WoL function.
2. The PC must be plugged in with a network cable.
3. To use the WOL function, the 220V power supply cannot be disconnected from the computer.
4. COLO PLAY is connected to the same Wi-Fi as the PC, and no firewall or any settings are blocking the network connection between them.
5. Recommended to use Win10 and above operating system page.

Enter the physical address (MAC address) of the network card of the PC in the COLO PLAY one-button power-on function, and then it can be powered on through the PC switch function. If your COLO PLAY is plugged into your PC's USB, you will need to set your PC to give USB power after power off, so that COLO PLAY is still powered on even when your PC is off.

Video guide:

- https://drive.google.com/file/d/1V0Ge0b1moT6EgLdm950VyBsRXFuDNWfM/view?usp=drive_link


Check PC MAC address:

- <https://www.tomshardware.com/how-to/find-mac-address-windows-11>


You can also use COLO PLAY Desktop to issue your PC's Mac address to COLO PLAY.

A. Windows Configuration


1. Right-click the Windows startup menu  and click [Device Manager]

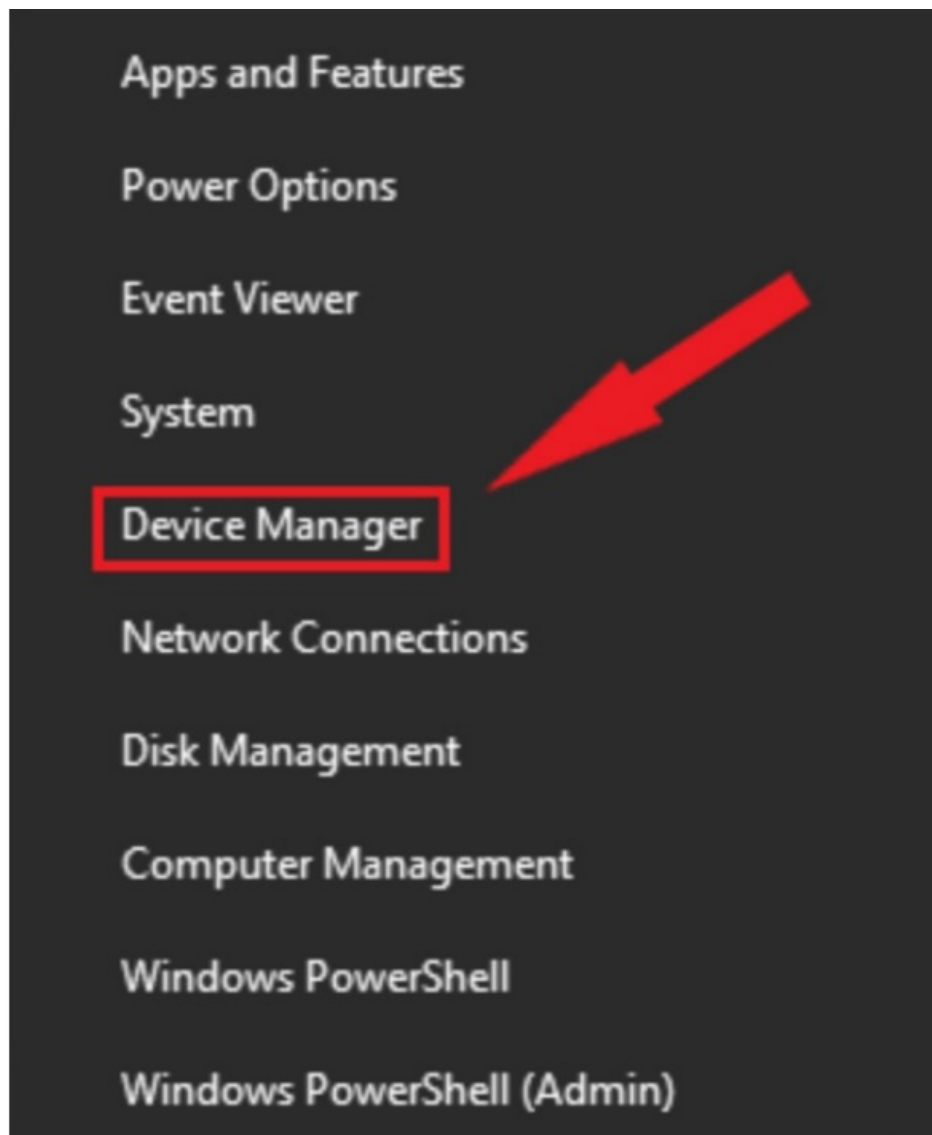


2. Click [Network adapters], and select the network controller.

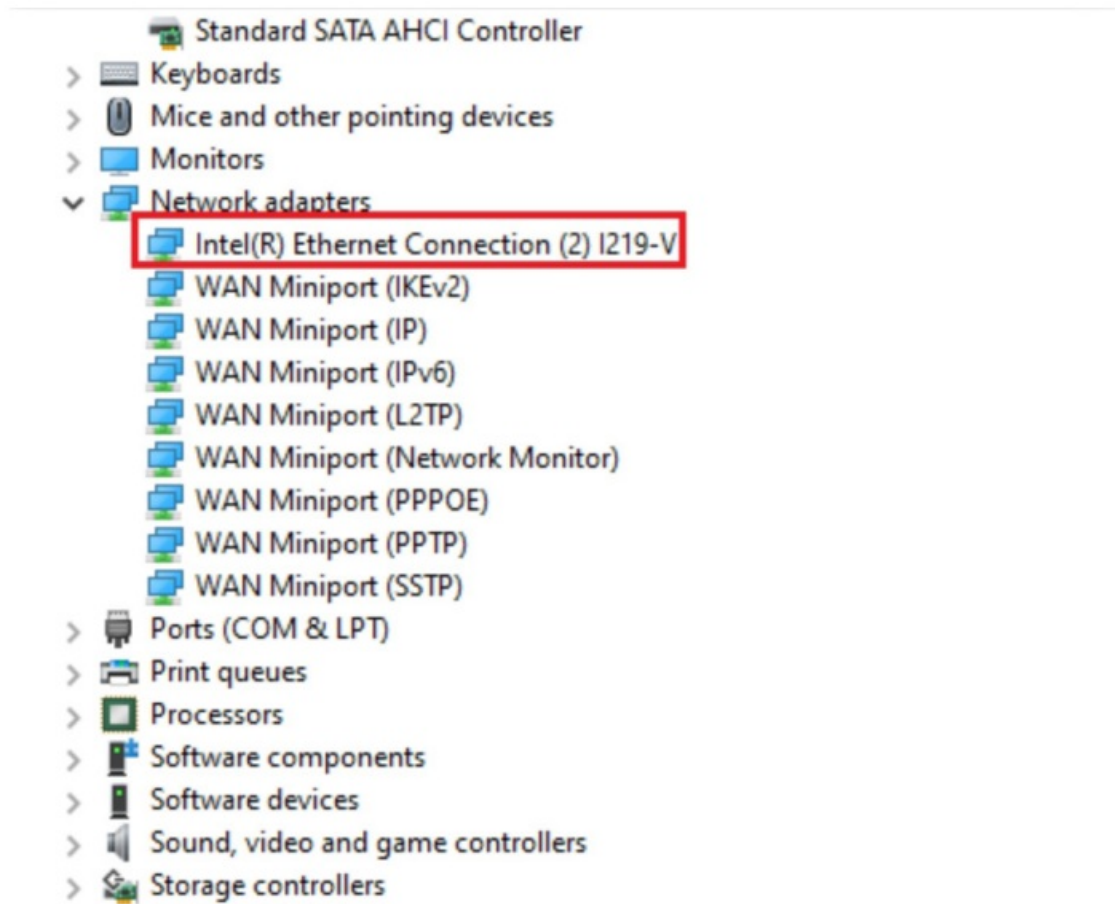


3. Click [Driver] item and confirm the driver is installed, as below, the driver version is 1.0.1.4

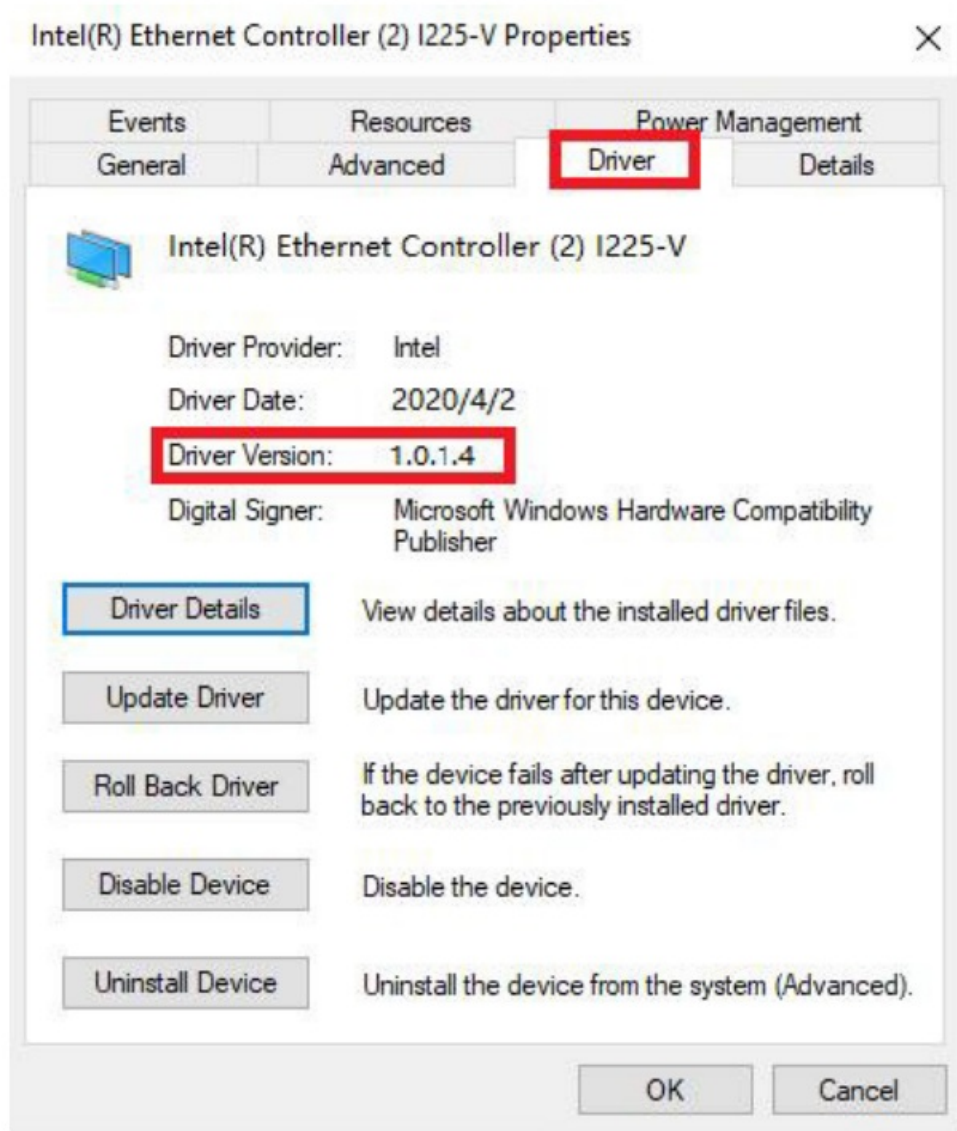

4. Click the [Power Management] page and confirm the checkbox that in front of [Allow this device to wake the computer] is ticked as below.

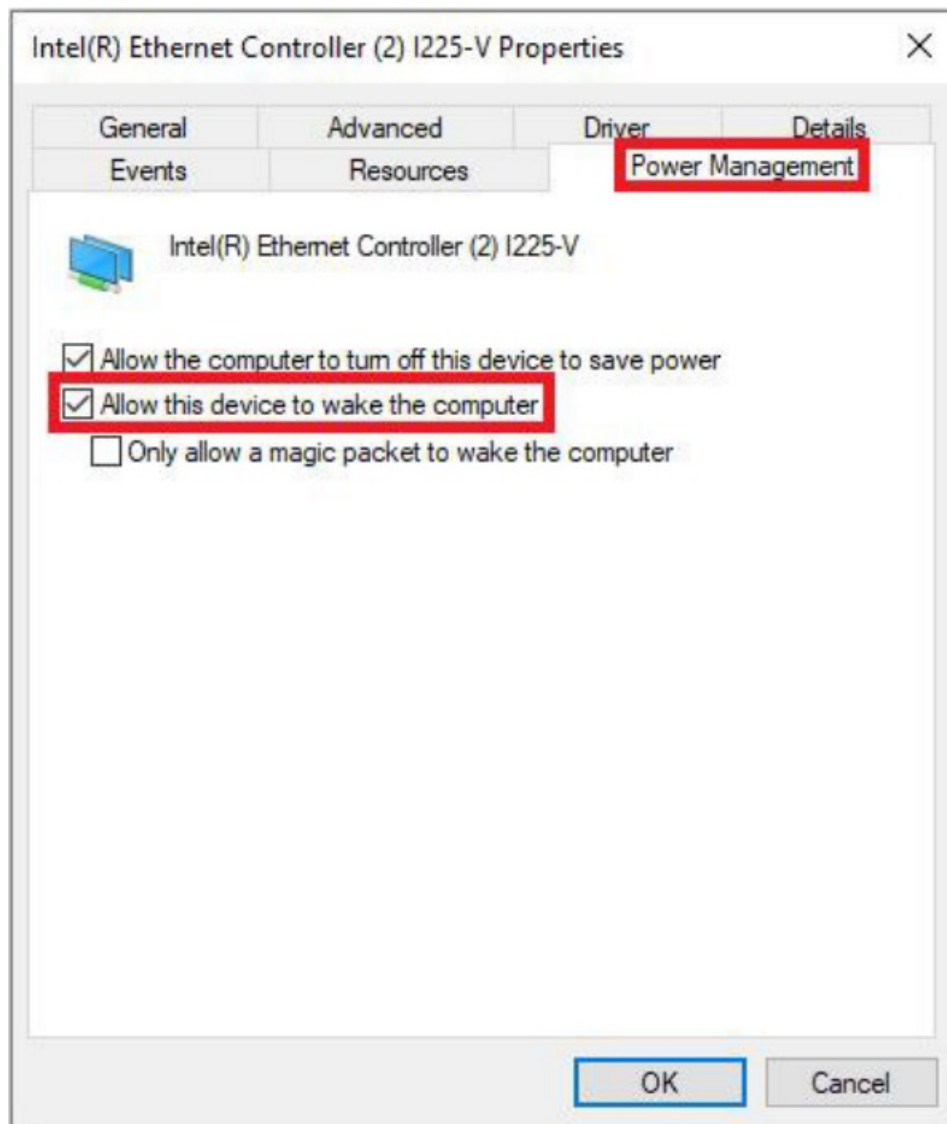


5. After that move to the Advanced tab. Scroll down the list of options under the Property windows. Look for the "Wake on Magic Packet" option and enable it from the "Value" drop-down menu. Finally, click OK to save the changes.

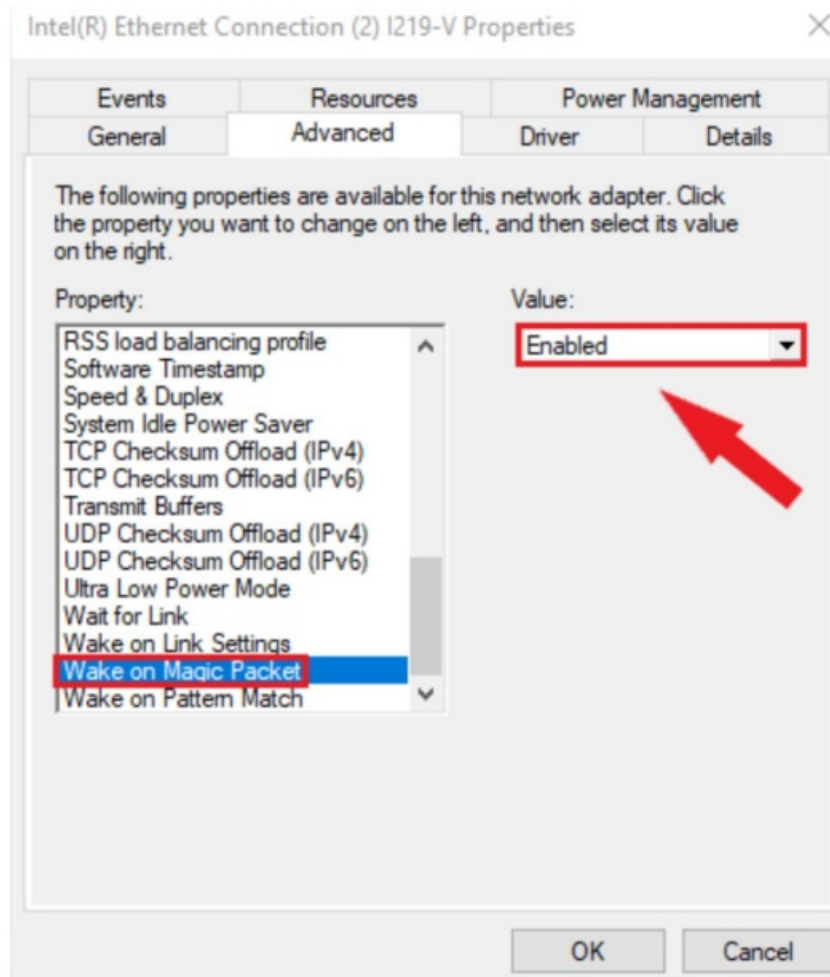


- Confirm whether to disable Turn on Fast Startup.


6. Search for and open the Control Panel using the search feature.

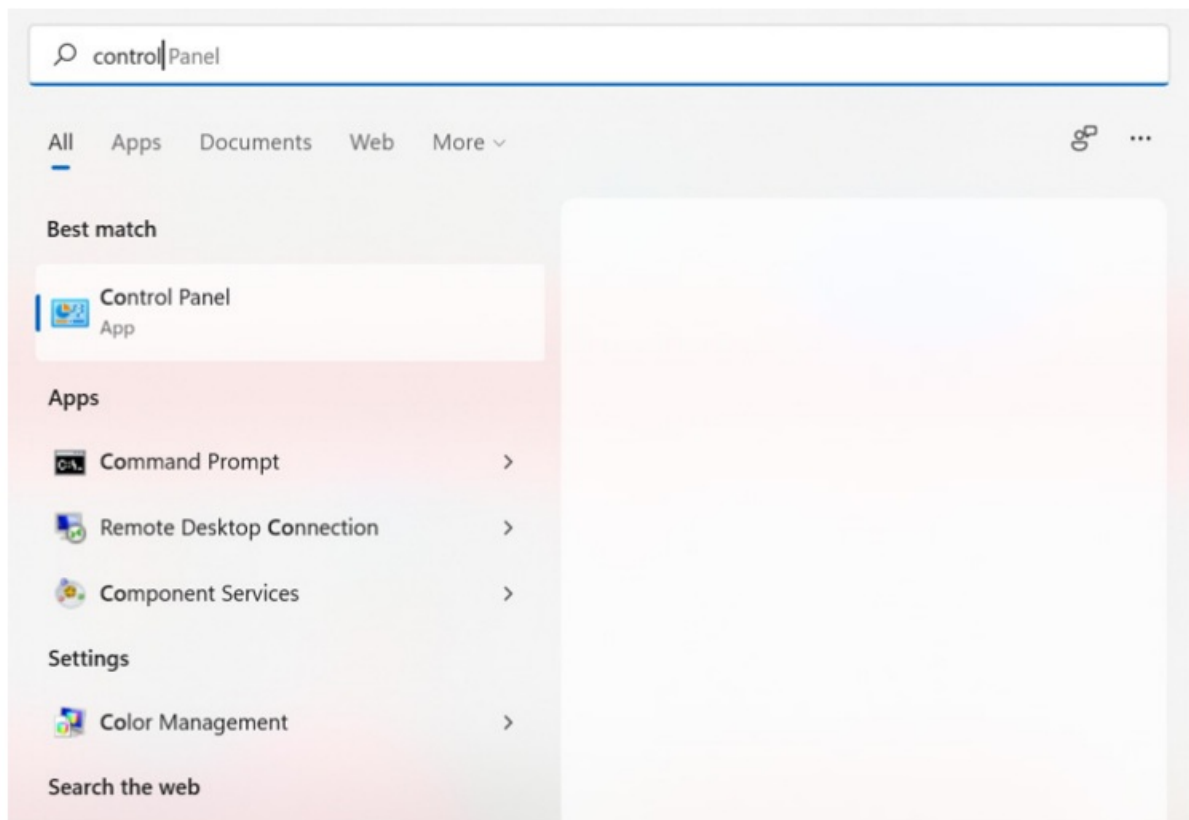


- **Choose View by** Category, then select Hardware and Sound.

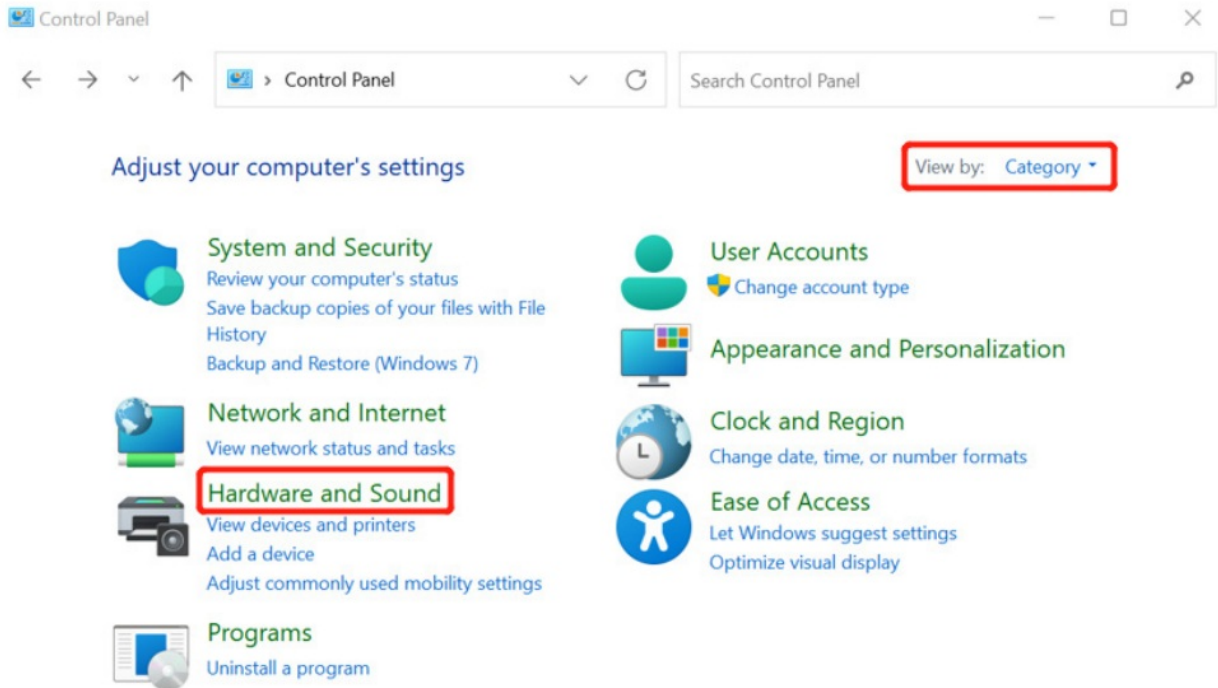


- Select Power Options.

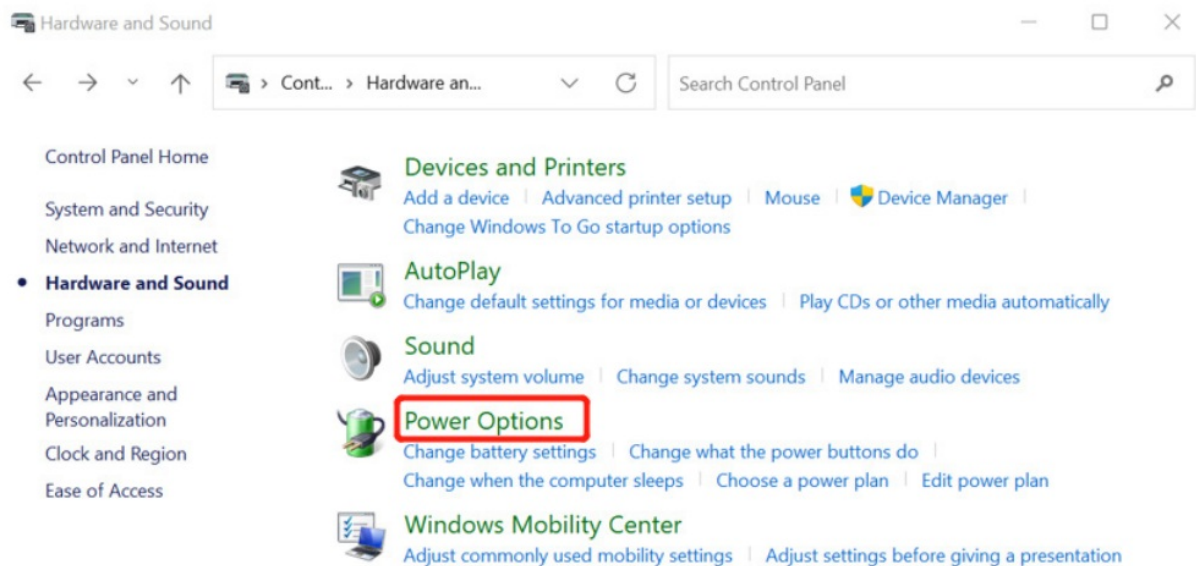

- Select Choose what the power buttons do.

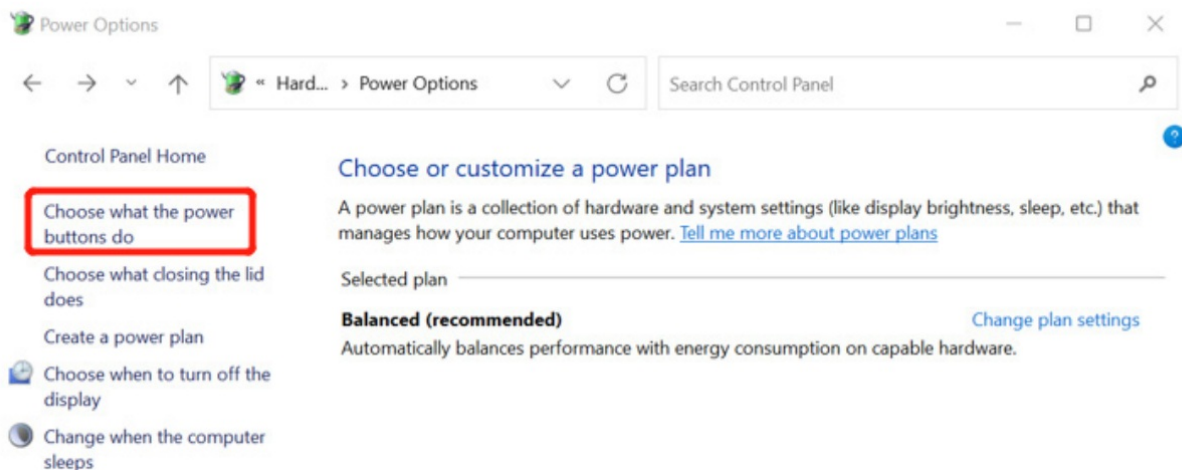

- Click Change settings that are currently unavailable.

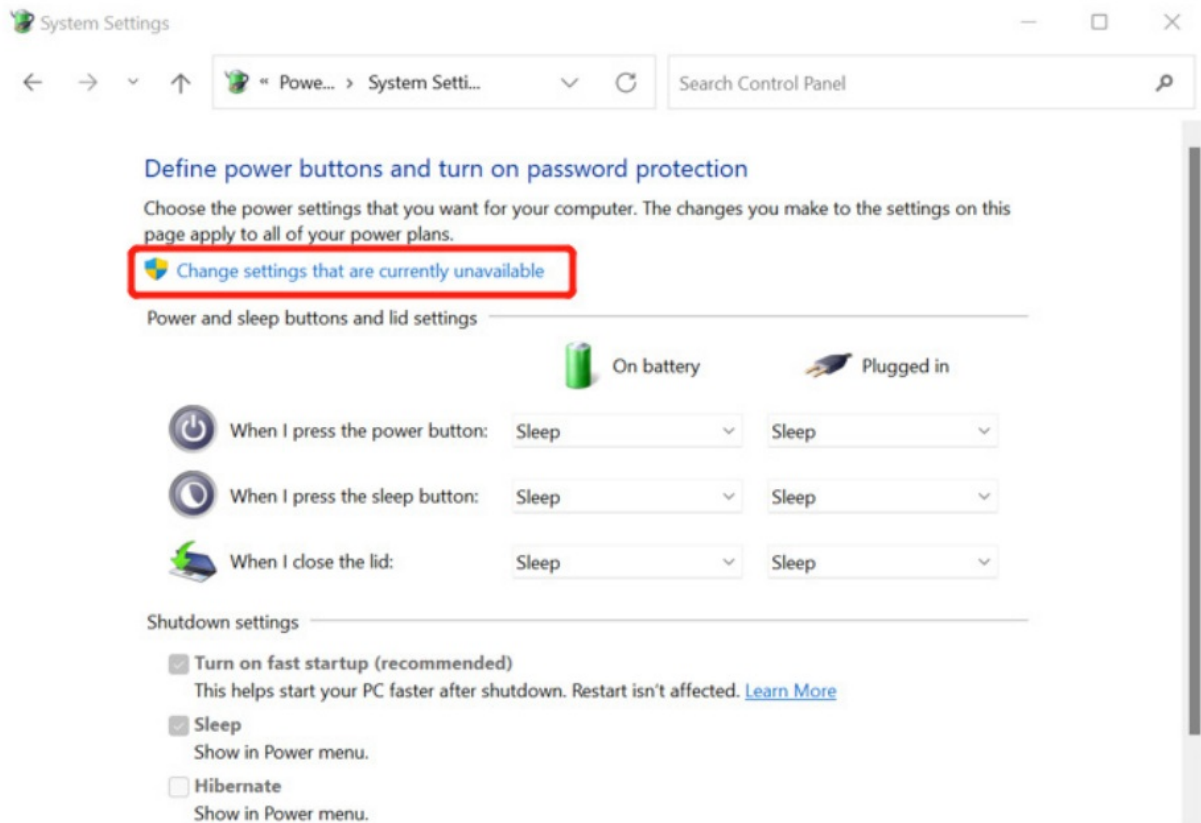

- Check or uncheck turn on fast startup to enable or disable the feature.



B. Motherboard Setting


Check whether your motherboard model supports the WoL function on the official website or directly search your motherboard brand model + WOL to check from the website.

GIGABYTE

1. Check your motherboard model <https://www.gigabyte.com/us/Support/FAQ/2657>
2. [Turn off the ErP function] in the motherboard BIOS menu and [turn on the RTC function]
 - Yes, it supports Wake on LAN. To enable it, please go to BIOSsetting > [Advanced] > [Onboard Device Configuration] to set up the [RTC SUPPORT] option.


ASUS

1. Please refer to the manual from the Asus website below <https://www.asus.com/US/support/FAQ/1045950>.


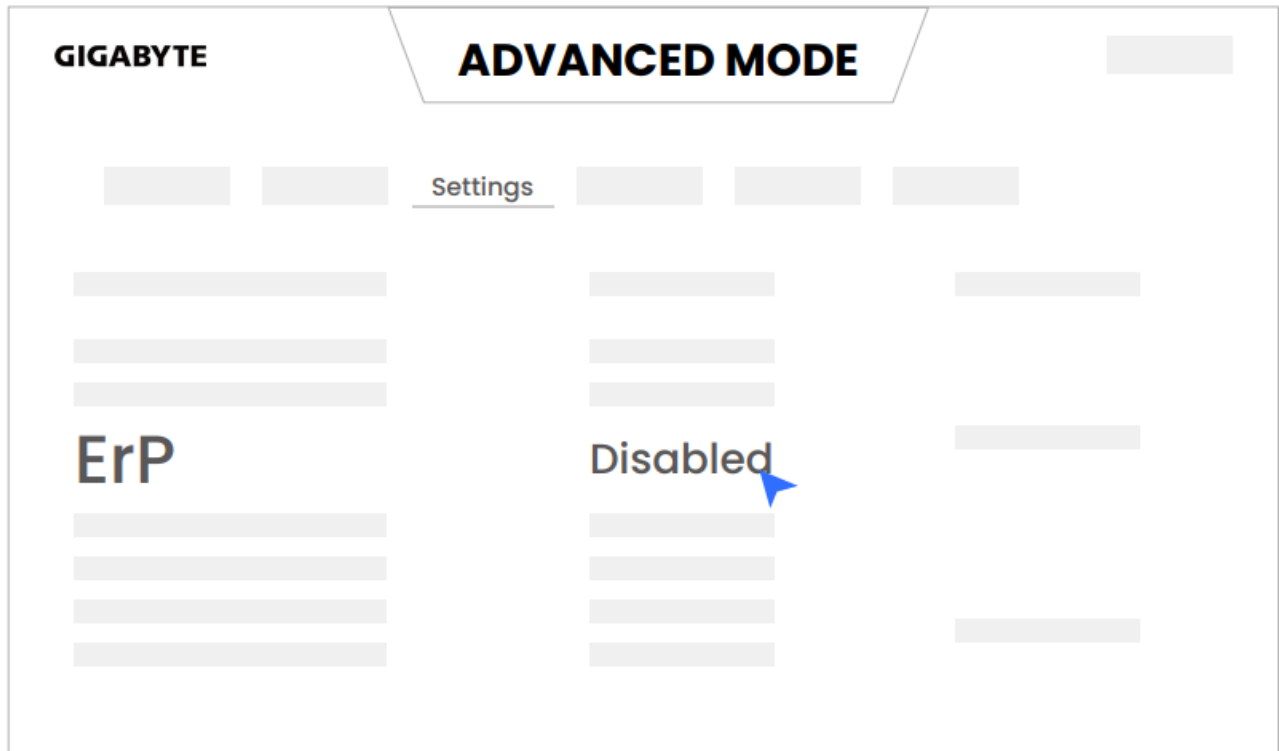


C. Verify

- After the settings are completed, it is recommended to use a third-party WoL app to test and verify whether the WoL function has been correctly opened.
- If you can wake up your computer through the phone, please go back to the beginning of this article to ensure that the conditions have been met, and enter the MAC address on COLO PLAY to complete the one-click boot operation.

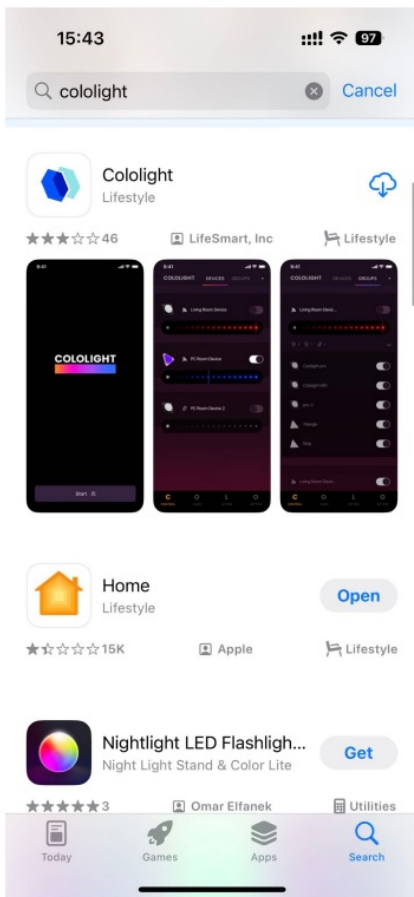

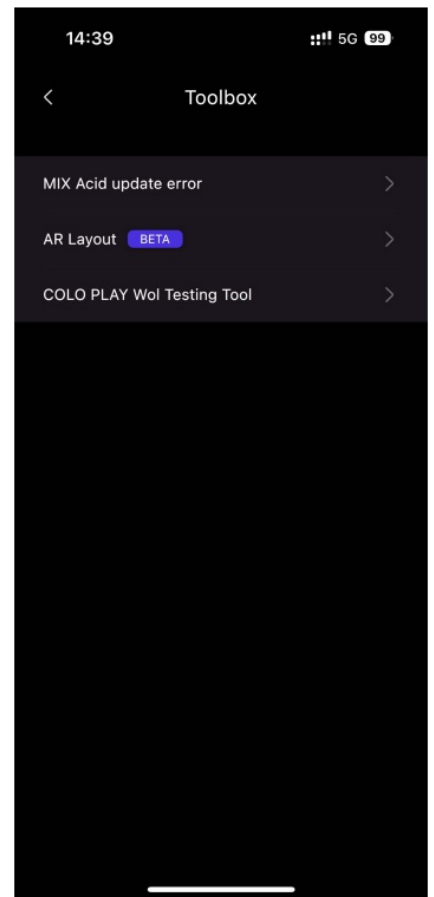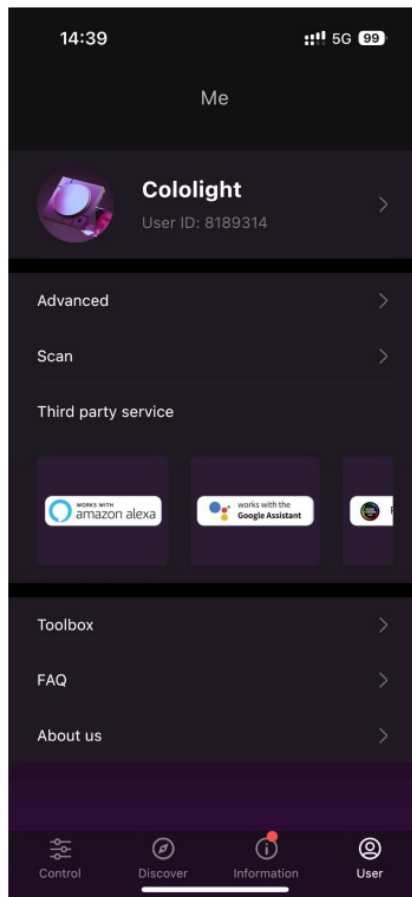

◦ www.cololight.com.



DECLARATION

- Copyright ©2024 I HANGZHOU LIFESMART TECHNOLOGY CO., LTD. All rights reserved.
- This manual is used only for instructional purposes.
- We strive to provide accurate information in this manual, but we are not able to ensure that the content of this manual is current.
- Statements, information, and advice in this manual do not constitute any expressed or implied assurance.
- Updated manuals are available on the website at iot.ilifesmart.com or by contacting our team.

Documents / Resources

	COLOLIGHT B0D8HYRB5L Colo Play Ultimate All In One Studio Controller [pdf] User Manual B0D8HYRB5L, B0D8HYRB5L Colo Play Ultimate All In One Studio Controller, Colo Play Ultimate All In One Studio Controller, Ultimate All In One Studio Controller, Studio Controller, Controller
	COLOLIGHT B0D8HYRB5L Colo Play Ultimate All In One Studio Controller [pdf] User Manual B0D8HYRB5L, B0D8HYRB5L Colo Play Ultimate All In One Studio Controller, Colo Play Ultimate All In One Studio Controller, Ultimate All In One Studio Controller, All In One Studio Controller, Studio Controller, Controller

References

- [LifeSmart - IoT Smart Home Solutions, Home Automation & Security Provider](#)

- [A \[Motherboard\]How to set and enable WOL\(Wake On Lan\) function in BIOS | Official Support | ASUS USA](#)
- [GIGABYTE Global](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.