



cudy FS1026PS1 24-Port 10-100M PoE Plus Switch User Manual

[Home](#) » [cudy](#) » cudy FS1026PS1 24-Port 10-100M PoE Plus Switch User Manual 

Contents

- [1 cudy FS1026PS1 24-Port 10-100M PoE Plus Switch](#)
- [2 Hardware connection](#)
- [3 Specifications](#)
- [4 Warranty Conditions](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)




cudy FS1026PS1 24-Port 10-100M PoE Plus Switch



Dear customer,
Thank you for purchasing our product. Please read the following instructions carefully before first use and keep this user manual for future reference. Pay particular attention to the safety instructions. If you have any questions or comments about the device, please contact the customer line.

Hardware connection

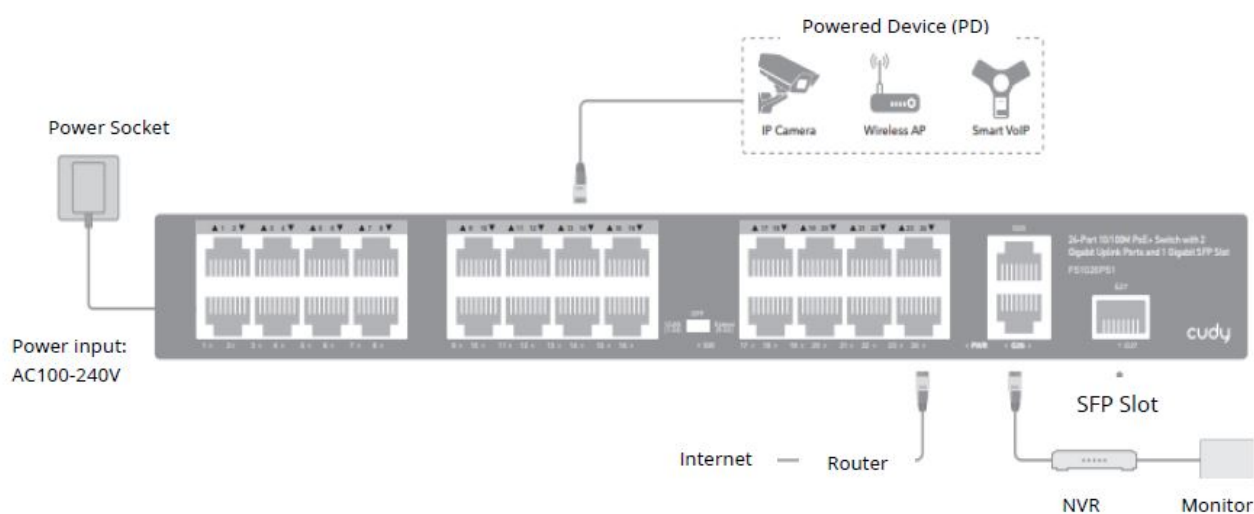

Specifications

Network Protocol:	IEEE802.3/IEEE802.3u/IEEE802.3x IEEE802.3ab/IEEE802.3z
PoE Standard:	IEEE802.3af/IEEE802.3at
Max each port:	15.4 W (IEEE 802.3af)
Max each port:	30 W (IEEE 802.3at)
PoE Compatibility:	IEEE 802.3af/ at adaptive
PoE port output:	DC48-55 V
Power pin:	Power over spare pairs 1/2 (+), 3/6 (-)
Network Media:	<u>10BASE-T: Cat 6 UTP (≤250 meter)</u>
	100BASE-TX: Cat5 or more UTP (≤100 meter)
	1000BASE-TX: Cat5 or more UTP (≤100 meter)
Optical:	<u>MultiMode Fiber: 850 nm, 1310 nm,</u>
	Transmission Distance: 550/2 Km
	Single-Mode Fiber: 1310 nm, 1550 nm,
	Transmission Distance: 20/40/60/80/100/120 km
Performance Specification:	<u>Bandwidth: 10.8 Gbps</u>
	MAC: 2 K
	Packet Buffer Memory: 1 M
	Packet Forwarding Rate: 8 Mpps
Power Supply	<u>Power input: AC100-240 V 50/60 Hz</u>
	Output: 52 V 5.76 A, Power Budget: 300 W
Product Dimension	320 mm * 210 mm * 46 mm
Package Dimension	370 mm * 275 mm * 85 mm

DIP explanation

VLAN	Port Isolation	Downlink designated ports are isolated from each other, only transmit data with the uplink port.
Default	Standard Switch	All ports communicate freely.
Extend	Link Extension	The specified port speed drops to 10 Mbps/s, max PoE transmission is 250 meters.

LED and Interface Explanation

PWR	Power supply indicator Red	Lighting	Powered
		Un-Light	No power
SW	RJ-45 LINK Indicator Green	OFF	Normal
		Vlan	Lighting
		Extend	Slow flash
Link ACT	RJ-45 ACT indicator Green	Lighting	Connecting
		Flashing	Data Transmit
		Un-Light	Disconnect

Warranty Conditions

A new product purchased in the Alza.cz sales network is guaranteed for 2 years. If you need repair or other services during the warranty period, contact the product seller directly, you must provide the original proof of purchase with the date of purchase.

The following are considered to be a conflict with the warranty conditions, for which the claimed claim may not be recognized:

- Using the product for any purpose other than that for which the product is intended or failing to follow the instructions for maintenance, operation, and service of the product.
- Damage to the product by a natural disaster, the intervention of an unauthorized person or mechanically through the fault of the buyer (e.g., during transport, cleaning by inappropriate means, etc.).
- Natural wear and aging of consumables or components during use (such as batteries, etc.).
- Exposure to adverse external influences, such as sunlight and other radiation or electromagnetic fields, fluid intrusion, object intrusion, mains overvoltage, electrostatic discharge voltage (including lightning), faulty supply or input voltage and inappropriate polarity of this voltage, chemical processes such as used power supplies, etc.
- If anyone has made modifications, modifications, alterations to the design or adaptation to change or extend the functions of the product compared to the purchased design or use of non-original components.

EU Declaration of Conformity

Identification data of the manufacturer's / importer's authorized representative: Importer: Alza.cz a.s.

Registered office: Jankovcova 1522/53, Holešovice, 170 00 Prague 7

CIN: 27082440

Subject of the declaration:

Title: PoE or Ethernet Device

Model / Type: Cudy-FS1026PS1

The above product has been tested in accordance with the standard(s) used to demonstrate compliance with the essential requirements laid down in the Directive(s):

Directive No. 2014/35/EU

Directive No. 2014/30/EU

Directive No. 2009/125/EC

Directive No. 2011/65/EU as amended 2015/863/EU

Prague

WEEE

This product must not be disposed of as normal household waste in accordance with the EU Directive on Waste

Electrical and Electronic Equipment (WEEE – 2012/19 / EU). Instead, it shall be returned to the place of purchase or handed over to a public collection point for the recyclable waste. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. Contact your local authority or the nearest collection point for further details. Improper disposal of this type of waste may result in fines in accordance with national regulations.



www.alza.co.uk/kontakt

+44 (0)203 514 4411







Importer

Alza.cz a.s., Jankovcova 1522/53, Holešovice, 170 00 Praha 7, www.alza.cz

Documents / Resources

  FS1026PS1 24-Port 10-100M PoE Plus Switch	cudy FS1026PS1 24-Port 10-100M PoE Plus Switch [pdf] User Manual FS1026PS1 24-Port 10-100M PoE Plus Switch, FS1026PS1, 24-Port 10-100M PoE Plus Switch , 10-100M PoE Plus Switch, PoE Plus Switch, Switch
--	---

References

-  [Alza.sk – rýchly a pohodlný nákup odkiaľkoľvek | alza.sk](#)
-  [alza.at](#)
-  [alza.co.uk](#)
-  [alza.de](#)
-  [alza.hu](#)
-  [alza.sk](#)