

devolo
Magic 1 LAN
Internet From
The Electrical
Socket



devolo Magic 1 LAN Internet From The Electrical Socket Owner's Manual

[Home](#) » [devolo](#) » devolo Magic 1 LAN Internet From The Electrical Socket Owner's Manual 

Contents

- [1 devolo Magic 1 LAN Internet From The Electrical Socket](#)
- [2 PRODUCT INFORMATION](#)
- [3 Preface](#)
- [4 Introduction](#)
- [5 Initial use](#)
- [6 Configuration](#)
- [7 Appendix](#)
- [8 Warranty conditions](#)
- [9 FAQs](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)

devolo

devolo Magic 1 LAN Internet From The Electrical Socket



PRODUCT INFORMATION

© 2024 devolo solutions GmbH Aachen (Germany)

- The reproduction and distribution of the documentation and software supplied with this product and the use of its contents is subject to written authorization from devolo. We reserve the right to make any alterations that arise as the result of technical development.

Trademarks

Android™ is a registered trademark of Open Handset Alliance. Linux® is a registered trademark of Linus Torvalds. Ubuntu® is a registered trademark of Canonical Ltd. Mac® and Mac OS X® are registered trademarks of Apple Computer, Inc. iPhone®, iPad®, and iPod® are registered trademarks of Apple Computer, Inc. Windows® and Microsoft® are registered trademarks of Microsoft, Corp. devolo and the devolo logo are registered trademarks of devolo solutions GmbH. The firmware package from devolo contains files that are covered by different licenses, in particular under devolo proprietary license and under open source license (GNU General Public License, GNU Lesser General Public License or FreeBSD License). The source code which is available for Open Source distribution can be requested in writing from gpl@devolo.de. All other names mentioned may be trademarks or registered trademarks of their respective owners. Subject to change without notice. No liability for technical errors or omissions. As part of an asset deal, Devolo Solutions GmbH was created by contract from devolo GmbH dated 1st April 2024.

- devolo solutions GmbH
- Charlottenburger Allee 67
- 52068 Aachen
- Germany
- www.devolo.global

Preface

Welcome to the fantastic world of devolo Magic!

In no time at all, devolo Magic transforms your house into a multimedia home that is ready for the future today.

devolo Magic gives you noticeably higher speeds, more stability and greater range, providing the perfect Internet experience as a result!

About this manual

- Chapter 1: Preface — covers safety-related product information as well as general information on this document.
- Chapter 2: Introduction – gives a brief introduction of „devolo Magic“ and a presentation of the devolo Magic 1 LAN adapter
- Chapter 3: Installation – shows how to successfully start using the adapter in your network and describes the devolo software as well as the reset of a devolo Magic adapter.
- Chapter 4: Configuration – describes in detail the setting options of the built-in devolo Magic configuration interface.
- Chapter 5: Appendix – includes tips for bandwidth optimization and our warranty terms.

Safety









- It is essential to have read and understood all safety and operating instructions before the device is used for the first time; keep this manual and/or installation guide as well as the flyer “Safety & service“ safe for future reference.


About the flyer “Safety & service“

The flyer “Safety & service“ provides cross-product and conformity-relevant safety information e. g. general safety notes, data of frequency range and transmitting power and channels and carrier frequencies for Wi-Fi products as well as disposal information. Printouts of the flyer and the installation guide are included with each product; this product manual is provided digitally. Furthermore, these and other relevant product descriptions are available to you in the download area of the respective product page on the Internet at www.devolo.global.

Description of the icons

This section contains a brief description of the icons used in this manual.

Icon	Description
	Very important safety symbol that warns you of hazardous electrical voltage which if not avoided can result in serious injury or death.
	An important safety symbol that warns you of a potentially dangerous situation involving a tripping hazard which can result in injuries.
	An important note that should be observed which can potentially lead to material damages.
	The device may only be used indoors in dry conditions.
Icon	Description
	The device is a Class I product. All electrically conductive (made of metal) housing parts where a voltage can be applied during operation or maintenance in the event of an error must be continuously connected to the earth wire.
	The manufacturer/distributing company uses the CE marking to declare that the product meets all applicable European regulations and has been subjected to the prescribed conformity assessment procedures.
	The manufacturer/distributing company uses the UKCA marking to declare that the product meets all applicable regulations of Great Britain and has been subjected to the prescribed conformity assessment procedures.
	Additional information, background material and configuration tips for your device.

Icon	Description
	Indicates a completed course of action

Intended use

Use devolo devices as described to prevent damage and injury.

devolo Magic 1 LAN 1-1

The device is a communication device only designed for indoors and is equipped with a PLC (PowerLine Communication) module. The devices communicate with each other by means of PLC. The device enable transmission of the existing Internet/ data signal over the in-house wiring and integrate Internet-compatible terminal devices into the home network. The delivered products are intended for operation in the EU, EFTA and UK.

CE conformity

A printout of the simplified CE declaration of this product is separately included. The complete CE declaration can be found under www.devolo.global/support/ce.

UKCA conformity

A printout of the simplified UKCA declaration of this product is separately included. The complete UKCA declaration can be found at www.devolo.global/support/UKCA.

devolo on the Internet

For detailed information on our products, visit www.devolo.global. There you will find product descriptions and documentation, and also updates of devolo software and your device's firmware. If you have any further ideas or suggestions related to our products, please don't hesitate to contact us at support@devolo.global!

Introduction

devolo Magic

Home is where devolo Magic is – in no time at all, devolo Magic transforms your house or flat into a multimedia home of the future with noticeably higher speed, more stability and greater range, providing the perfect Internet experience as a result! Be inspired by products that are astonishingly easy to install, with impressive, innovative technology and unbeatable performance.

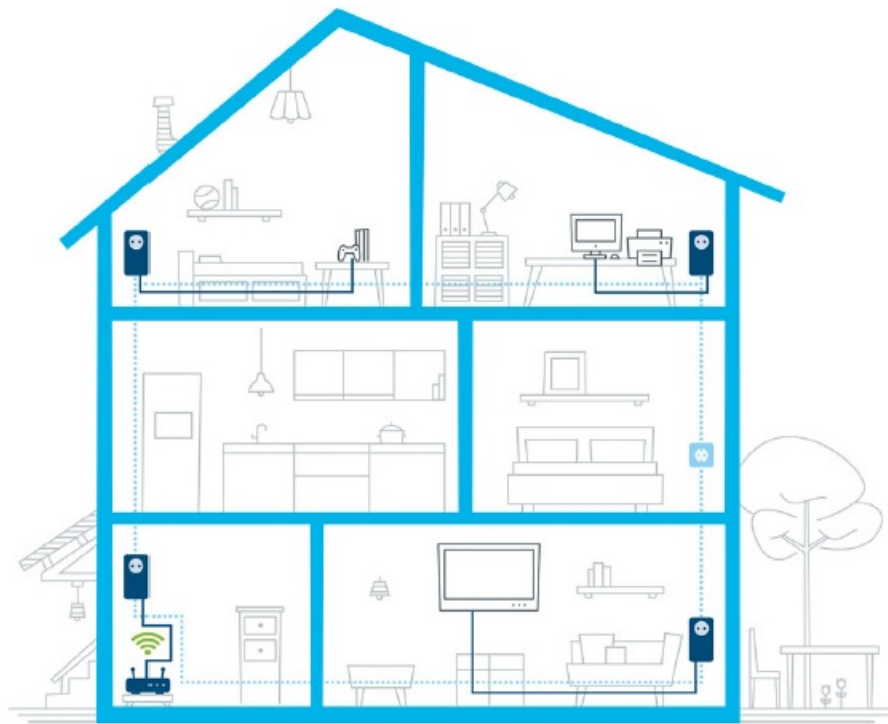


Fig. 1 devolo Magic throughout the home

Be ready for the technology of the future today

devolo Magic embodies the new generation of the tried-and-tested Powerline technology (PLC) based on the cutting-edge G.hn architecture. G.hn was developed by the International Telecommunication Union (ITU) with ongoing development provided primarily by the HomeGrid Forum industry association. devolo Magic products are certified according to HomeGrid standards and are compatible with other HomeGrid-certified products.

Like the HomePlug AV technology used in established devolo dLAN devices, devolo Magic uses the household mains supply for data transmission and secures ideal performance and stability in locations where network cables are not viable or desired and/or the Wi-Fi frequently falls short due to ceilings and walls.

To set up a devolo Magic network, you need at least two devolo Magic devices. For technical reasons, devices from the devolo Magic series are not compatible with dLAN devices.

Introduction to the

devolo Magic adapter:

Unpack – plugin – get started and be ready for the new generation of tried-and-tested Powerline technology:

- Speed and stability – thanks to consistent data transmission speed at up to 1200 Mbps over distances of up to 400 meters, the devolo Magic 1 LAN promises entertainment at the highest level.
- Security – with 128-bit AES Powerline encryption
- Energy-efficiency – the integrated PowerSave mode cuts energy consumption automatically during low data traffic.
- A devolo Magic 1 LAN transforms any electrical socket in your household electrical wiring into a Gigabit LAN Internet access point.
- Its integrated electrical socket can be used (like a normal wall socket) to supply power to an additional network device or a power strip.

- The Gigabit LAN port on the devolo Magic 1 LAN lets you connect a stationary network device – such as a game console, television or media receiver – to your Internet access point over the Powerline network (e.g. Internet router).

The devolo Magic 1 LAN features

- One Gigabit network connection
- One indicator light The LED status display can be disabled. You can find more information about this in Chapter 4 Configuration.
- One PLC/reset button (next to the network connection)
- One integrated electrical socket



Fig. 2: devolo Magic 1 LAN with country-specific connector and power socket

Pairing

devolo Magic adapters that are in factory default condition, i.e. have been purchased or successfully reset (see Chapter Resetting a devolo Magic adapter or removing it from a devolo Magic network), automatically start to attempt to pair with another devolo Magic adapter when reconnected to the mains supply.

Starting up a new devolo Magic network

After plugging the devolo Magic adapters into available power sockets, a new devolo Magic network is established automatically within 3 minutes. Expanding an existing devolo Magic network by adding another devolo Magic adapter In order to use a new devolo Magic 1 LAN in your devolo Magic- network, first you have to connect it to your existing devolo Magic adapters devices as a network. This is accomplished by using a shared password, which can be assigned in various ways:

- Using devolo Cockpit or the devolo Home Network App (see Chapter 3.5 Installation of devolo software)
- Using the web interface (see Chapter 4.3 Powerline)
- Using the PLC/reset button as described below.
 1. To do so, plug the new devolo Magic adapter into an available power socket and, for approximately 1 second, press the PLC/reset button on a devolo Magic adapter in your existing devolo Magic network.

2. The new devolo Magic adapter pairs automatically so no button needs to be pressed. The LED of this adapter now also flashes white.

After a short time, the flashing LED becomes a steady white light. The devolo Magic adapter has been successfully integrated into your existing devolo Magic network. For each pairing operation, only one additional devolo Magic adapter can be added at a time. You can find detailed information about installing devolo Magic adapters in Chapter

Connecting the devolo Magic 1 LAN.

Resetting a devolo Magic adapter or removing it from a devolo Magic network

1. To remove a devolo Magic adapter from your devolo Magic network and successfully restore its entire configuration to the factory default settings, press and hold the reset button longer than 10 seconds.
2. Wait until the LED flashes white and then disconnect the devolo Magic adapter from the mains supply.

Keep in mind that all settings that have already been made will be lost!

Reading the indicator light

The integrated indicator light (LED) shows the status for the devolo Magic 1 LAN by illuminating and/or flashing:

	LED	Flashing behaviour	Meaning	LED status display (web interface*)
1	Red LED	Lights up for up to 2 sec.	Start-up process	Cannot be disabled
2	Red LED	Flashes at intervals of 0.5 sec. (on/off)	Status 1: The reset of the devolo Magic adapter was successful. The PLC/reset button has been pressed and held for 10 seconds.	Cannot be disabled
			Status 2: The devolo Magic adapter (once again) has the factory default settings. Since the last reset, no pairing with another devolo Magic adapter has taken place. Connect the adapter with another devolo Magic adapter to create a full-fledged PLC network as described in Chapter 2.3 Pairing .	

	LED	Flashing behaviour	Meaning	LED status display (web interface*)
3	Red LED	Lights up steadily	<p>Status 1:</p> <p>The other network nodes are in standby mode and cannot currently be accessed over the mains supply. The PLC LEDs of the other devolo Magic adapters flash white only for a short time.</p>	Can be disabled
			<p>Status 2:</p> <p>The connection to the other network nodes has been interrupted. There may be electro-magnetic or radio frequency interference on the power line. In this case, put the devolo Magic adapters closer to each other or try to shut off the source of interference.</p>	
4	Red and white LED	Flashes at intervals of 0.1 sec. red/2 sec. white	Data transmission rate not in optimum range **	Can be disabled

	LED	Flashing behaviour	Meaning	LED status display (web interface*)
5	White LED	Status 1: Flashes at intervals of 0.5 sec. (on/off) Status 2: Flashes at intervals of 1 sec. (on/off)	Status 1: This devolo Magic adapter is in pairing mode and the system is searching for new devolo Magic adapters. Status 2: Someone has triggered the "Identify device" function on the web interface or in the devolo Home Network App. This function identifies the devolo Magic adapter being sought.	Cannot be disabled
6	White LED	Lights up steadily	The devolo Magic connection does not have any issues and the devolo Magic adapter is ready to operate.	Can be disabled
7	White LED	Flashes at intervals of 0.1 sec. on / 5 sec. off	The devolo Magic adapter is in standby mode.* **	Can be disabled
8	Red and white LED	Flashes at intervals of 0.5 sec. red / 0.5 sec. white	The devolo Magic adapter is carrying out a firmware update.	Cannot be disabled

- Information about the web interface can be found in Chapter 4 Configuration.
- Information on improving the transmission rate can be found in Chapter 5.1 Bandwidth optimisation.
- A devolo Magic adapter switches to standby mode after approximately 10 minutes if no active network device (e.g. computer) is connected to the network interface. In this mode, the devolo Magic adapter cannot be accessed over the electrical wiring. As soon as the network device (e.g. computer) connected to the network interface is switched on again, your devolo Magic adapter can also be accessed over the electrical wiring again.

Check whether the adapter is connected to the mains supply correctly and whether the pairing operation has been carried out successfully. For more information about this, refer to 3.4 Connecting the devolo Magic 1 LAN

Network connection

You can use the network connection on the devolo Magic adapter to connect it to a PC or television using a standard network cable.

Integrated electrical socket

Always use the integrated electrical socket on the devolo Magic adapter when connecting other consumers to the mains supply. In particular, electronic devices with mains adapter can negatively affect PLC performance. The integrated mains filter in the devolo Magic adapter filters any such external interference and reduces any impairment of PLC performance.

Initial use

This chapter tells you everything you need to know to set up and use your devolo Magic 1 LAN. We describe how to connect the adapter and briefly describe the devolo software. For more information, please visit our website www.devolo.global.

Package contents

Please ensure that the delivery is complete before beginning with the installation of your devolo Magic 1 LAN:

- **Starter Kit:**
 - 2 devolo Magic 1 LAN1-1
 - 2 network cables
 - Printed installation guide
 - Printed flyer “Safety & Service“
 - Printed simplified UKCA/CE declaration
 - Online manual or
- **Extension:**
 - 1 devolo Magic 1 LAN1-1
 - 1 Network cable
 - Printed installation guide
 - Printed flyer “Safety & Service“
 - Printed simplified UKCA/CE declaration
 - Online manual
- devolo reserves the right to change the package contents without prior notice.

System requirements

- **Operating systems supported by devolo Cockpit:**
 - from Windows 7 (32-bit/64-bit),
 - from Ubuntu 13.10 (32-bit/64-bit),
 - from Mac (OS X 10.9)
- **Gigabit network connection**
- **Network connection**
 - Please note that your computer or other device must have a network card or network adapter with a network interface. To set up a devolo network, you need at least two devolo adapters.

Important notes

Use the devolo devices, the devolo software, and the provided accessories as described to prevent damage and injury.

It is essential to have read and understood all safety and operating instructions before the device is used for the first time.

In this context, please read chapter 1.2 Safety as well as the supplied flyer „Safety & service“. The flyer is also available in the download area of the respective product page on the Internet at www.devolo.global. **CAUTION!** Damage to the device caused by ambient conditions Only use the device indoors in dry conditions

- **DANGER!** Electric shock caused by electricity Device must be plugged into a power socket with a connected earth wire (PE)
- **CAUTION!** Damage to the device caused by unpermitted voltage range
- Only operate devices on mains power supply as described on the rating plate.

Technical data

For the permitted voltage range for operating the device and the power consumption, refer to the type plate on the rear of the device. For further technical data of this product, please refer to the data sheet in the download area of the respective product page on the Internet at www.devolo.global.

Connecting the devolo Magic 1 LAN

In the following sections we describe how to connect the devolo Magic 1 LAN and integrate it into a network. We clarify the exact procedures based on potential network scenarios.

Starter Kit – Automatic set-up for a new devolo Magic network

1. Connect one devolo Magic 1 LAN to your Internet access device's network connection (e.g. your Internet router).
2. Connect the other devolo Magic 1 LAN to the network connection of your computer or another network device using a network cable.
3. **CAUTION!** Tripping hazard Lay the cable in a barrier-free manner and ensure that the electrical socket and the connected network devices are easily accessible
4. Plug both devolo Magic adapters into available power sockets within 3 minutes. As soon as the LEDs on both adapters flash white at regular intervals of 0.5 sec., they are ready to operate and automatically start the process of establishing an encrypted connection to each other (see Chapter 2.3.1 Reading the indicator light). If the LEDs on both devolo Magic adapters light up in white, then your devolo Magic network has been set up according to your individual specifications and is protected from unauthorized access.

Addition – Expanding an existing

network by adding another devolo Magic adapter Before you can use the devolo Magic 1 LAN in your devolo Magic network, first you have to connect it to your existing devolo Magic adapters as a network. This is accomplished by using a

shared password.

CAUTION! Tripping hazard

Lay the cable in a barrier-free manner and ensure that the electrical socket and the connected network devices are easily accessible

1. Connect the devolo Magic 1 LAN to the network connection of your computer or another network device using a network cable.
2. Plug the devolo Magic 1 LAN into an available power socket. As soon as the LED flashes white at regular intervals of 0.5 seconds, the adapter is ready to operate but not yet integrated into a devolo Magic network (see Chapter 2.3.1 Reading the indicator light).
3. Within 3 minutes, press the PLC/reset button on a devolo Magic adapter in your existing devolo Magic network for approximately 1 sec.

The new devolo Magic adapter pairs automatically so no button needs to be pressed. The LED of this adapter now also flashes white. If the LEDs light up white on both devolo Magic adapters, the new adapter has been successfully integrated into your existing devolo Magic network. For each pairing operation, only one additional adapter can be added at a time.

Changing the network password

- A network password can also be changed in the following ways:
 - Using the web interface of the devolo Magic adapter (see Chapter 4.3 Powerline) or
 - Using devolo Cockpit or the devolo Home Network App. For more information, refer to the following chapter.

Installation of devolo software

Installing devolo Cockpit software

devolo Cockpit finds all accessible devolo Magic adapters in your devolo Magic network, displays information about these devices and encrypts your devolo Magic network individually. You can use the software to navigate to the integrated web interface. Operating systems supported by devolo Cockpit (Version 5.0 or later):

- from Windows 7 (32-bit/64-bit) or later,
- from Ubuntu 13.10 (32-bit/64-bit),
- from Mac (OS X 10.9)

You can find the product manual, software and additional information on devolo Cockpit online at www.devolo.global/devolo-cockpit.

Downloading the devolo Home Network App

The devolo Home Network App is devolo's free app also for checking and configuring WiFi, PLC and LAN connections for the devolo Magic adapter (using a smartphone or tablet). The smartphone or tablet connects to the devolo Magic adapter at home over Wi-Fi.

1. Download the devolo Home Network App to your smartphone or tablet computer from the corresponding store.
2. The devolo Home Network App is placed in your smartphone's or tablet's app list as usual. Tapping on the devolo Home Network App icon brings you to the start menu.

You can find more information about the devolo Home Network App online at www.devolo.global/home-network-app.

Removing the devolo Magic adapter from a network

To remove a devolo Magic adapter from your network and successfully restore its entire configuration to the factory default settings, press the PLC/ reset button longer than 10 seconds. Wait until the LED flashes white and then disconnect the adapter from the mains supply. Keep in mind that all settings that have already been made will be lost! To integrate the mains supply into another network, proceed as described in Chapter 3.4.2 Addition – Expanding an existing network by adding another devolo Magic adapter.

Configuration

The devolo Magic 1 LAN has a built-in web interface that can be called up using a standard web browser. Here, you can read out device information and configure some settings for operating the devolo Magic adapter.

Calling up the built-in web interface


You can access the built-in web interface for the devolo Magic 1 LAN in different ways:

- Using the devolo Home Network App on your smartphone or tablet, you can access the device's web interface by tapping on the corresponding adapter symbol for the devolo Magic 1 LAN.
- Using the devolo Cockpit software, you can access the web interface of the devolo Magic adapter by clicking on the tab for the device's configuration page.

Then the program determines the current IP address and starts the configuration in the web browser. You can find more information on devolo software in Chapter 3.5 Installation of devolo software.

Menu description

All menu functions are described in the corresponding interface as well as in the associated chapter in the manual. The sequence of the description in the manual follows the structure of the menu. The central web interface areas are displayed at the edge of the screen. Click a menu to switch directly to that menu.

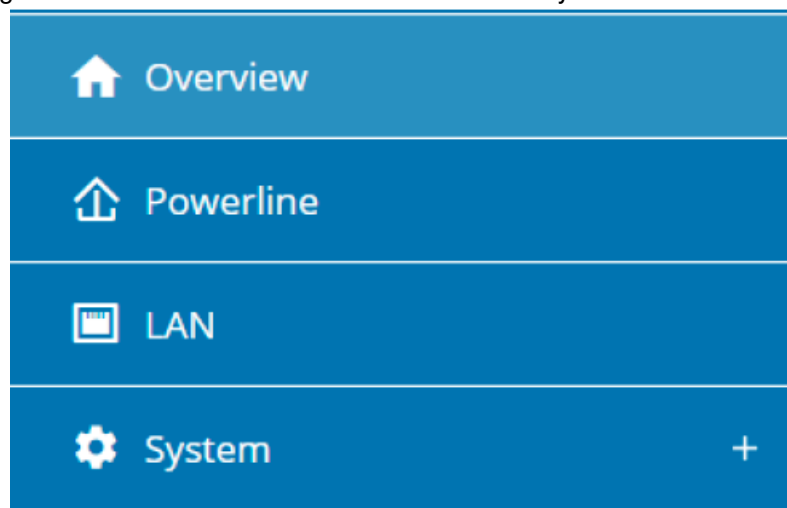

Logging in

The web interface is not password protected. Assigning a login password is mandatory when logging in for the first time to prevent unauthorised access by third parties.

- You can find more information on the login process in Chapter 4.5 System.

Enter your existing password each time you login again and confirm by pressing Log in.



Welcome to your Magic 1 LAN 1-1

Please log in with your password!




Login

Logging out



- Log out of the web interface by clicking Log out.

Language selection

-  Select the desired language in the language selection list.

Making changes

- Once you make a change, two icons are shown on the corresponding menu page:
- Disk icon: Your settings are being saved.
- X icon: The operation is being cancelled. Your settings are not being saved.

Required fields

Fields with a red border are required fields. This means entries must be made in these fields to continue with the configuration.

Help text blank fields

Fields that have not been filled in yet contain greyed out help text, which indicates the required content for the field. This help text disappears immediately once content has been entered.

Default settings

Some fields contain default settings which ensure the greatest amount of compatibility and ease of use. Default settings are identified with an * in drop-down menus. Default settings can of course be replaced with customised information.

Recommended settings

Some fields include recommended settings. Recommended settings can of course be replaced with customised information.

Invalid entries

Entry errors are either highlighted by a red border or error messages are shown.

Buttons

- Click the Disk icon to save the settings for the respective web interface area.
- Click the X icon or use the Menu path above the buttons to exit the respective web interface area.
- Click the Recycle bin icon to delete an entry.
- Click the Arrow icon to refresh a list.

Overview

In the Overview area, you will find information on hardware and software for the devolo Magic adapter and network details.



System

- **Name:** Device name
- **Serial number:** Device serial number
- **MAC address:** MAC address of the device
- **Firmware version:** Firmware version of the device
- **System uptime:** Operating time since the last restart

Powerline

- **Local device:** Status information „connected“ or „not connected“
- **Network:** Number of devices connected to the network

Connections

- The table lists all available and connected devolo Magic adapters for your network along with displaying the following details:

Device ID	MAC address	Transmit (Mbps)	Receive (Mbps)
1	XXXXXXXXXX	256	393
2	XXXXXXXXXX	944	438
3	XXXXXXXXXX	256	393
4 (this device)	XXXXXXXXXX	---	---
5	XXXXXXXXXX	169	103

- **Device ID:** number of the respective devolo Magic adapter in the devolo Magic network
- **MAC address:** MAC address of the respective devolo Magic adapter
- **Transmit (Mbps):** Data transmission rate
- **Receive (Mbps):** Data reception rate

LAN—Ethernet

- **Port:** network connection; if a connection has been detected, the speed (10/100/1000 Mbps) and the mode (half/full duplex) are specified; otherwise, the status “unconnected” is specified.

LAN – IPv4

- **DHCP:** Display indicating whether DHCP is switched on or switched off
- **Address:** IPv4 address in use to access the Internet
- **Netmask:** The subnet mask used in a network separates the IP address into a network address and a device address.
- **Default gateway:** Within the IP environment, this function is usually provided by the router. All IP packages which did not find any other routing information are forwarded to the default gateway. Therefore, clients which do not support dynamic routing send all IP packages to be routed to the default gateway.
- **Name server:** address of the name server in use to decode a name (e.g. www.devolo.global)

LAN – IPv6

- **Link-local address:** selected by the device itself and is valid for the “Link-locale Scope” range. The address always begins with FE80. It is used to establish connections within a local network without the need for a global IP address.
- **Protocol:** Display indicating which address configuration protocol is in use — SLAAC or DHCPv6.

Under IPv6 two dynamic address configurations exist:

- Stateless Address AutoConfiguration (SLAAC)
- Stateful Address Configuration (DHCPv6)

The router (as gateway) specifies which of these two proceedings is used. This is done using the M bit in the Router Advertisement (RA) and means “Managed address configuration”.

- M-Bit=0: SLAAC

- M-Bit=1: DHCPv6
- **SLAAC address:** global IPv6 address in use to access the internet
- **DNS server:** address of the name server in use to decode a name (e.g. www.devolo.global)

You can find more detailed information on the displayed network details in Chapter 4.4 LAN.

Powerline

In the Powerline area, you will find functions and information on the topic of Powerline and adapter pairing.

To form one Powerline network, all devices need to receive a common encryption password.

This happens automatically if you initiate pairing by pressing the Powerline button on two or more devices in succession. The automatically generated password of the first device will be assigned to all other devices.

Instead of pressing the physical button on the device itself, you can also activate the following button.

Start pairing

When you activate the following button, the current password will be deleted.

Leave Powerline network

Instead of the auto-generated password, you can also assign your own password for encryption. The same password must be entered for all devices which should be part of the same Powerline network. Note that if you change the password, the Powerline connection to this device will be interrupted.

Powerline password:

Password

Powerline domain name:

devolo-1234567890123456

Master selection:

Preferred at gateway (default)

Powerline network

In order to use a new devolo Magic 1 LAN in your devolo Magic network, first you have to connect it to your existing devolo Magic adapters devices as a network. This is accomplished by using a shared password. This can be assigned in different ways:

- Using devolo Cockpit or the devolo Home Network App (see Chapter 3.5 Installation of devolo software),
- Only using the PLC button (see Chapter 2.3 Pairing and 3.4.2 Addition – Expanding an existing network by adding another devolo Magic adapter)
- Using the web interface, in the Powerline menu; as described below:

Pairing – Using on-screen button

1. Click Start pairing to start the pairing operation. This may take some time.
2. As soon as the new devolo Magic adapter is integrated into your existing network, it appears in a list of available and established connections (see Chapter Connections).

Pairing – Using custom password

You can also assign your network a custom PLC password you pick yourself. Enter this password for each devolo Magic adapter in the Powerline password field and confirm your entry with OK. Note that the custom password is not assigned to the whole PLC network automatically. Instead, you must assign it separately to each of your devolo Magic adapters.

Powerline domain name


The Powerline domain name determines the name of your PLC network.

Unpairing – Resetting or removing an adapter from a network

1. To remove a devolo Magic adapter from your devolo Magic network, click Leave Powerline network.
2. Wait until the PLC LED flashes white and then disconnect the devolo Magic adapter from the mains supply.

Compatibility mode

Using as VDSL connection may negatively impact the performance of the bandwidth connection by crosstalk of the signal.

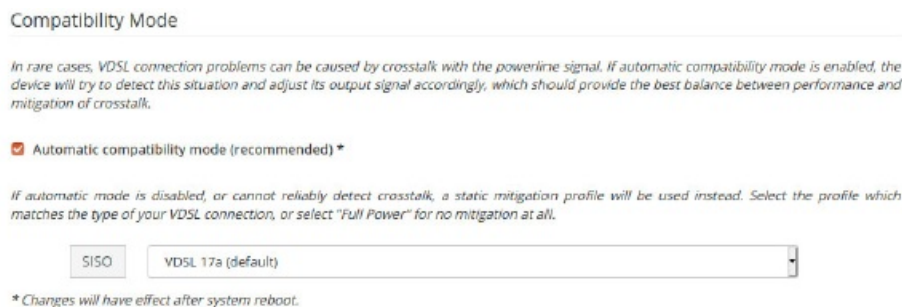

The screenshot shows a 'Compatibility Mode' section. It contains a paragraph explaining that VDSL connection problems can be caused by crosstalk and that automatic compatibility mode will adjust the output signal. Below this is a checkbox labeled 'Automatic compatibility mode (recommended) *' which is checked. Another paragraph explains that if automatic mode is disabled, a static mitigation profile will be used. Below this is a dropdown menu with 'SISO' selected and 'VDSL 17a (default)' as an option. At the bottom, a note states '* Changes will have effect after system reboot.'

In order to mitigate any potential negative effects the device provides the following options: Automatic compatibility mode If the option Automatic compatibility mode (recommended) is enabled, the device can automatically adjust the output signal to avoid interference as much as possible. This option is configured by default.

Manual compatibility mode

If an interference has not been eliminated despite activating the automatic setting, please disable it and set the compatibility mode as well as the signal transmission profile manually:

SISO

- Full power
- VDSL 17a (default)
- VDSL 35b

Get in touch with your internet provider to find out which signal transmission profile is the best option for your internet connection. The SISO operating mode and the VDSL 17a signal transmission profile are configured by default.

LAN

You make changes to the network settings in the LAN area.

IPv4 Configuration

☐ Get IP configuration from a DHCP server

Address:

192.168.1.254

Netmask:

255.255.255.0

Default gateway:

192.168.1.254

Name server:

192.168.1.254

IPv6 Configuration

Address:

fe80:2f58:12aa:0:0:0:0:0:0

Prefix:

64

All changes except the name server will have effect after system reboot.

You can access the web interface for the devolo Magic 1 LAN using its current IP address. This may be an IPv4 and/or IPv6 address, which is either entered manually as a static address or automatically retrieved from a DHCP server.

IPv4 Configuration

In the factory default settings, only the DHCP enabled option for IPv4 is enabled. This means that the IPv4 address is retrieved automatically from a DHCP server. The currently assigned network data is visible (greyed out). If a DHCP server is already present on the network for giving out IP addresses (e.g. your Internet router), you should enable the DHCP enabled option so that the devolo Magic 1 LAN automatically receives an address from it. If you want to assign a static IP address, make entries accordingly for the Address, Subnetmask, Default gateway and Name server fields. Confirm your settings by clicking the Disk icon. Then, restart the devolo Magic adapter to ensure that your changes take effect.

IPv6 Configuration

Address: Display indicating the global IPv6 address in use to access the internet.

Prefix: Display indicating the prefix length in bit. A prefix is the first bit of the IPv6 address. Example: 2a00:fe0:313:25:f606:8dff:fe4f:6aee with prefix 64 means that the prefix here is 2a00:fe0:313:25.

System

In the System area, you can configure the settings for security and other devolo Magic adapter device functions.

Status

Here you can view the most important information on the devolo Magic adapter, including the current date and time, time zone and MAC address of the adapter.

Date and Time

Local time:	23.10.2022 21:33
Time Server 1:	ptbtime1.ptb.de
Time Server 2:	ptbtime2.ptb.de
Time Server 3:	ptbtime3.ptb.de

MAC address

Ethernet: 98:96:74:14:25:85

Management

System Information

System information lets you enter an user-defined name in the Device name (hostname) field. This information is particularly helpful if multiple devolo Magic adapters are to be used and identified in the network.

System Information

Device name:

Max. 63 char.

Hostname:

Your device will be shown on your home gateway under this name.

Password

Set a new password to protect this webinterface.

Enter old password:



Enter new password:



Confirm new password:



Password.

You can set a login password for accessing the web interface. By default, the built-in web interface of the devolo Magic 1 LAN is not protected by a password. We recommend assigning a password when the installation of the devolo Magic 1 LAN is complete to protect it against tampering by third parties. To do so, enter the desired new password twice. Now the web interface is protected against unauthorised access with your custom password!

Identify Device

The devolo Magic adapter can be located using the Identify device function. Click Identify to make the white PLC LED for the corresponding adapter flash for 2 minutes to make it easier to identify by sight.

LED

Enable the LED disabled option if the LEDs on the devolo Magic adapter are intended to be switched off for normal operation. An error status is indicated by corresponding flashing behaviour regardless of this setting.

Identify Device

Activate this button to identify this device. The Powerline LED will flash in white for two minutes.

Identify

LED

You can disable the LED. This applies to normal operation, e.g. when the device is connected to a Powerline network or has entered standby mode. The LED still indicates ongoing pairing or connection problems.

☒ LED enabled

Power Saving

Allow device to enter power saving mode if reduced ethernet traffic is detected. Warning: Latency might increase when very slow traffic is detected.

☐ Power saving enabled

Power saving

If Powersave mode has been enabled, the devolo Magic 1 LAN switches to Powersave mode automatically whenever reduced data transmission over ethernet is detected. The latency (time for transmitting a data packet) may be negatively affected. Powersave mode is disabled in the devolo Magic 1 LAN factory default settings.

Standby

If Standby mode is enabled, the devolo Magic 1 LAN automatically switches to Standby mode if no ethernet connection has been enabled, i.e. if no network device (e.g. computer) is switched on and connected to the network interface and if Wi-Fi is disabled. In this mode, the devolo Magic 1 LAN is not accessible over the Powerline network. As soon as the network device (e.g. computer) connected to the network interface is switched on again, your adapter can also be accessed over the electrical wiring again.

Standby

Allow device to enter standby mode if no ethernet link is detected. Warning: This device becomes unreachable via PLC network when ethernet link is off.

☒ Standby enabled

Time Zone

Europe/Berlin

Time Server (NTP)

The switch between summer and winter time is done automatically by the time server. No manual settings are needed.

Without a time server available all time based services will not work, including firmware updates!

+ Add

ID Time Server

Allowed number of Time Servers: 5.

1 ptbtime1.ptb.de

Standby mode is enabled in the devolo Magic 1 LAN factory default condition. For information on the LED behaviour of the devolo Magic adapter in standby mode, refer to Chapter 2.3.1 Reading the indicator light.

Time zone

Under Time zone, you can select the current time zone, e.g. Europe/Berlin.

Time server

The Time server (NTP) option lets you specify a time server. A time server is a server on the Internet whose task consists of providing the exact time. Most time servers are coupled with a radio clock. Select your time zone and time server; the devolo Magic 1 LAN automatically switches between standard time and summer time.

Configuration

Here you can restart the devolo Magic adapter and/or reset it to the factory default settings.

Factory Settings

When you activate this button, all device settings will be deleted and the configuration will be reset to factory defaults.

Factory reset

Reboot

When you activate this button, the device will be restarted.

Reboot

Factory Settings

1. To remove a devolo Magic adapter from your devolo Magic network and successfully restore its entire configuration to the factory default settings, click Factory reset.
2. Wait until the PLC LED flashes white and then disconnect the devolo Magic adapter from the mains supply.

Keep in mind that all settings that have already been made will be lost!

Reboot

In order to reboot the devolo Magic 1 LAN, click Reboot button.

Firmware

The firmware of the devolo Magic 1 LAN includes the software for operating the device. If necessary, devolo offers new versions on the Internet as a file download. The firmware update can be initiated automatically or manually.

Current Firmware

Firmware version: 7.12.5.124 (2022-08-29)

Firmware update

Your device can regularly check the devolo update server for firmware updates. New versions can be installed either manually or completely automatically at night.

☒ Regularly check for firmware updates

☒ Automatically install firmware updates

Instead of using the devolo update server, you can also upload a new firmware file from your computer. You can download them from the devolo Website.

Browse for firmware file ...

Upload

Regularly check for firmware updates

The devolo Magic 1 LAN can look for up-to-date firmware automatically. To do this, enable the option Regularly check for firmware updates.

The devolo Magic 1 LAN lets you know when a new firmware version becomes available and asks if firmware should be updated.

Automatically install firmware updates

With the option Automatically install firmware updates enabled, the devolo Magic 1 LAN 1-1 automatically installs the firmware it has found.

Manually initiate a firmware update

1. In order to manually update the firmware, visit the devolo website.
2. Download the appropriate file for the devolo Magic 1 LAN to your computer.
3. Next, click on Browse for firmware file... and select the downloaded firmware file.
4. Confirm your settings by clicking the diskette icon. After a successful update, the devolo Magic 1 LAN restarts automatically.

Ensure that the update procedure is not interrupted. The currently installed firmware of the devolo Magic adapter is displayed on the overview page (see 4.2 Overview).

Appendix

Bandwidth optimization

To significantly improve the transmission capacity of the network, we recommend that you comply with the following “connection rules”:

- Plug the devolo Magic 1 LAN directly into a wall socket. Avoid using power strips. This may impair the transmission of the PLC signals.

- If there are several sockets in the wall directly next to each other, they behave like a power strip. Individual sockets are optimal.

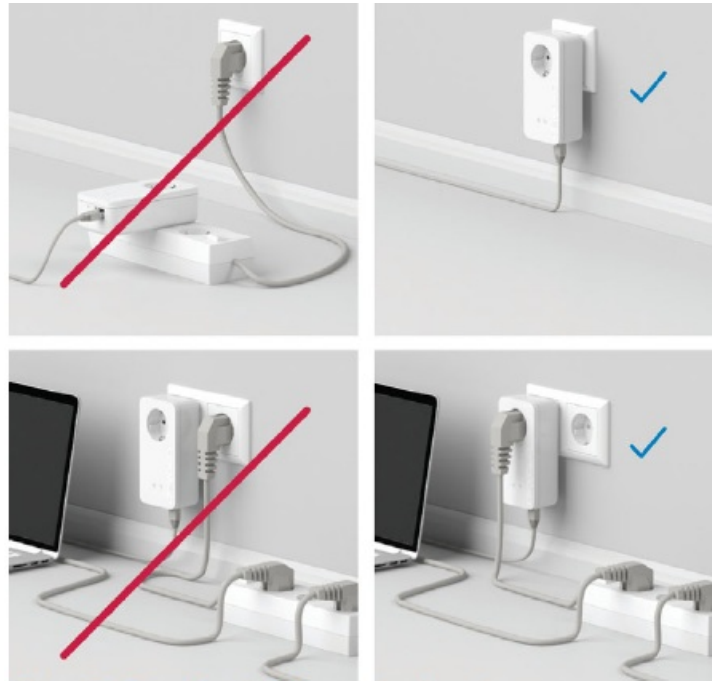


Fig. 3: Bandwidth optimisation

Warranty conditions

If your devolo device is found to be defective during initial installation or within the warranty period, please contact the vendor who sold you the product. The vendor will take care of the repair or warranty claim for you. The complete warranty conditions can be found at www.devolo.global/support.

FAQs

- **Q: How far can the devolo Magic adapter reach within a home?**
 - A: The devolo Magic adapter can provide a Gigabit-LAN internet access up to 400 meters over the power lines within your home.
- **Q: Can the LED status indicator be turned off?**
 - A: Yes, the LED status indicator can be deactivated. Refer to Chapter 4 Configuration or the devolo Cockpit Software product manual at www.devolo.de/devolo-cockpit for more information.

Documents / Resources

	devolo Magic 1 LAN Internet From The Electrical Socket [pdf] Owner's Manual Magic 1 LAN Internet From The Electrical Socket, Magic 1 LAN, Internet From The Electrical Socket, Electrical Socket, Socket
---	---

References

- [Internet überall – devolo stoppt die WLAN-Schwäche | devolo](#)
- [devolo Cockpit: Powerline-Netzwerk verwalten | devolo](#)
- [devolo Home Network App: Intuitiv zum Heimnetzwerk](#)

- [!\[\]\(7e19807c61da14f515588e95cd49886c_img.jpg\) Support zu Fragen rund um devolo Produkte | devolo](#)
- [!\[\]\(8ff9e60a4b0560d7ec99179ef4779d9e_img.jpg\) Internet anywhere – devolo cures weak Wi-Fi | devolo](#)
- [!\[\]\(ab9b69bf5753a01c76b30af859454360_img.jpg\) Internet anywhere – devolo cures weak Wi-Fi | devolo](#)
- [!\[\]\(c5af66b13c724ca428497900cdbbc9b3_img.jpg\) Internet anywhere – devolo cures weak Wi-Fi | devolo](#)
- [!\[\]\(1fde827780c8f912fd3ae9174d52d155_img.jpg\) Internet überall – devolo stoppt die WLAN-Schwäche | devolo](#)
- [!\[\]\(49ab9fdb6ddb6816bcb8ccc012d5cebd_img.jpg\) Internet überall – devolo stoppt die WLAN-Schwäche | devolo](#)
- [!\[\]\(a10cf212d457430b842f8ac59c63db70_img.jpg\) devolo Cockpit: Powerline-Netzwerk verwalten | devolo](#)
- [!\[\]\(e8a826213cf8b53a8c13f5432344afc9_img.jpg\) devolo Home Network App: Intuitiv zum Heimnetzwerk](#)
- [!\[\]\(7ffe3c6e7552aa3eb962276cd7a9a979_img.jpg\) Support zu Fragen rund um devolo Produkte | devolo](#)
- [!\[\]\(28e94a65fe1d8cf887928bbaaa2c7303_img.jpg\) Internet anywhere – devolo cures weak Wi-Fi | devolo](#)
- [!\[\]\(7db790dc622e1ac5f1c44afb7a5212a6_img.jpg\) dLAN Cockpit software for devolo Powerline products | devolo](#)
- [!\[\]\(86147531a4f05b1215989ff8ab43fe6d_img.jpg\) devolo Home Network App: Intuitive home network | devolo](#)
- [!\[\]\(c3492017d65b370ec6b463430fff1ce7_img.jpg\) Support & Contact | devolo](#)
- [User Manual](#)

Manuals+ Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.