

DrayTek

V4.3.2.5

Vigor1000B

Multi WAN

Security Router



DrayTek V4.3.2.5 Vigor1000B Multi WAN Security Router User Guide

[Home](#) » [DrayTek](#) » DrayTek V4.3.2.5 Vigor1000B Multi WAN Security Router User Guide 

Contents

- 1 [DrayTek V4.3.2.5 Vigor1000B Multi-WAN Security Router3](#)
- 2 [Specifications](#)
- 3 [FAQs](#)
- 4 [PRODUCT INFORMATION](#)
- 5 [Safety Instructions and Approval](#)
- 6 [Package Content](#)
- 7 [Panel Explanation](#)
- 8 [Hardware Installation](#)
- 9 [Software Configuration](#)
- 10 [Customer Service](#)
- 11 [Documents / Resources](#)
 - 11.1 [References](#)
- 12 [Related Posts](#)

DrayTek

DrayTek V4.3.2.5 Vigor1000B Multi-WAN Security Router3



Specifications

- Product Name: Multi-WAN Security Router Vigor 1000B
- Model Number: Vigor 1000B
- Manufacturer: DrayTek Corp.
- Address: No. 26, Flushing Rd., Hukou, Hsinchu Industrial Park, Hsinchu 303, Taiwan
- Firmware Version: V4.3.2.5

FAQs

- **Q: What should I do if I encounter technical issues with the router?**
 - A: For technical issues, refer to the troubleshooting section in the user manual or contact DrayTek customer service for assistance.

PRODUCT INFORMATION

Intellectual Property Rights (IPR) Information

Copyrights © All rights reserved. This publication contains information that is protected by copyright. No part may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language without written permission from the copyright holders.

Trademarks The following trademarks are used in this document:

- Microsoft is a registered trademark of Microsoft Corp.
- Windows 8, 10, 11, and Explorer are trademarks of Microsoft Corp.
- Apple and Mac OS are registered trademarks of Apple Inc.
- Other products may be trademarks or registered trademarks of their respective manufacturers.

Safety Instructions and Approval

Safety Instructions

- Read the installation guide thoroughly before you set up the router.

- The router is a complicated electronic unit that may be repaired only by authorized and qualified personnel. Do not try to open or repair the router yourself.
- Do not place the router in a damp or humid place, e.g. a bathroom.
- Do not stack the routers.
- The router should be used in a sheltered area, within a temperature range of +5 to +40 Celsius.
- Do not expose the router to direct sunlight or other heat sources. The housing and electronic components may be damaged by direct sunlight or heat sources.
- Do not deploy the cable for LAN connection outdoors to prevent electronic shock hazards.
- Do not power off the device when saving configurations or firmware upgrades. It may damage the data in a flash. Please disconnect the Internet connection on the device before powering it off when a TR-069/ ACS server manages the device.
- Keep the package out of reach of children.
- When you want to dispose of the router, please follow local regulations on the conservation of the environment.

Warranty

We warrant to the original end-user (purchaser) that the router will be free from any defects in workmanship or materials for two (2) years from the date of purchase from the dealer. Please keep your purchase receipt in a safe place as it serves as proof of date of purchase. During the warranty period, and upon proof of purchase, should the product have indications of failure due to faulty workmanship and/or materials, we will, at our discretion, repair or replace the defective products or components, without charge for either parts or labor, to whatever extent we deem necessary to restore the product to proper operating condition. Any replacement will consist of a new or re-manufactured functionally equivalent product of equal value, and will be offered solely at our discretion. This warranty will not apply if the product is modified, misused, tampered with, damaged by an act of God, or subjected to abnormal working conditions. The warranty does not cover the bundled or licensed software of other vendors. Defects that do not significantly affect the usability of the product will not be covered by the warranty. We reserve the right to revise the manual and online documentation and to make changes from time to time in the contents hereof without obligation to notify any person of such revisions or changes.

EU Declaration of Conformity

Hereby, DrayTek Corporation declares that the equipment type Vigor1000B complies with EU EMC Directive 2014/30/EU, Low Voltage Directive 2014/35/EU, and RoHS 2011/65/EU.

- Product name: Multi-WAN Security Appliance
- Model number: Vigor1000B
- Manufacturer: DrayTek Corp.
- Address: No.26, Flushing Rd., Hukou, Hsinchu Industrial Park, Hsinchu 303, Taiwan

Package Content


Take a look at the package content. If anything is missing or damaged, please contact DrayTek or the dealer immediately.



Vigor router




Quick Start Guide

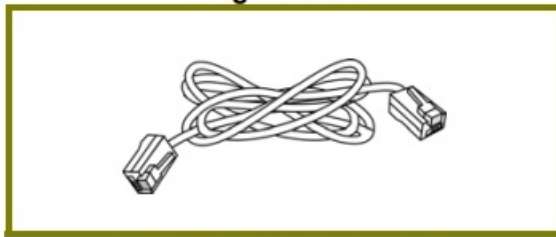


RJ-45 Cable (Ethernet)



Rack mount kit (brackets)

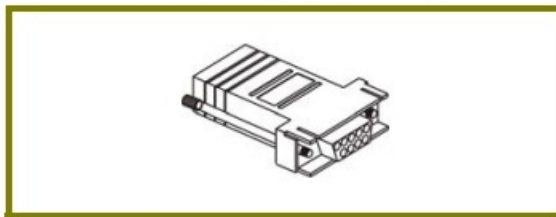


Console Connector

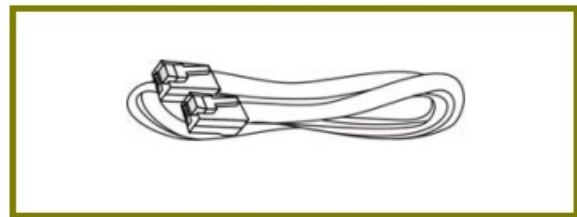


Console Flat Cable

The type of the power cord depends on the country that the router will be installed.

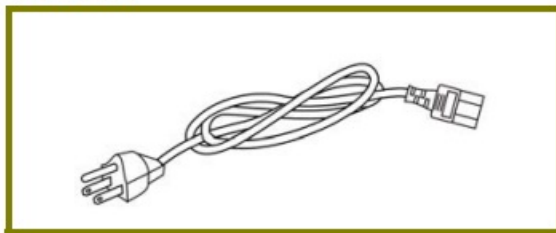

USA/Taiwan-type Power Cord

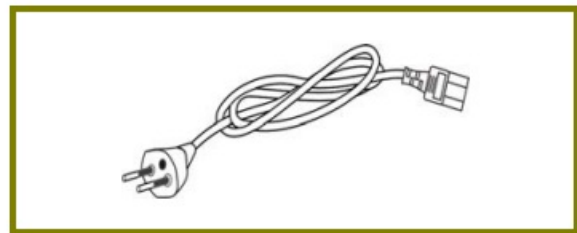

EU-type Power Cord


Panel Explanation



LED



LED		Status	Explanation
PWR		On	The router is powered on.
		Off	The router is powered off.
ACT		Blinking	The system is active.
		Off	The system is hanged.
USB		On	The USB device is installed and ready.
		Off	No USB device is installed.
SFP+		On	The fiber connection is established.
		Blinking	The data is transmitted.
		Off	No fiber connection is established or the system is hanged.
P3 ~P10	Left	On	The Ethernet link is established on the corresponding port.
		Off	No Ethernet link is established.
		Blinking	The data is transmitted.
	Right	On	The Ethernet link is established on the corresponding port with 1G Mbps or above.
		Off	The Ethernet link is established on the corresponding port with less than 1G Mbps.

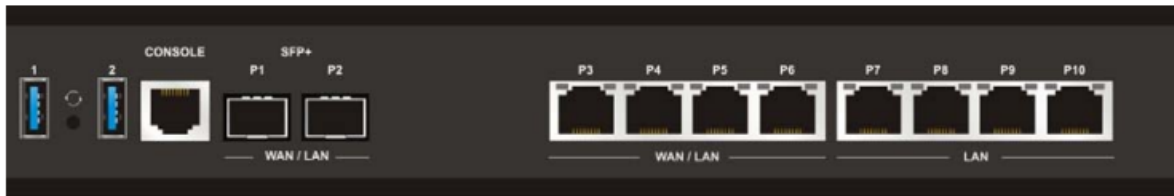Connectors



Interface	Description
USB1 / USB2	Connector for the USB device.
Console	Provided for technician use.
SFP+ (P1-P2)	Connector for SFP module with the rate of 10G/1G bps.
P3-P6	Connectors for remote network devices or local network devices (WAN/LAN) with the rate of 1G/100M/10M bps.
P7-P10	Connector for local network devices (LAN) with the rate of 1G/100M/10M bps.
	The Factory Reset button is used to restore the default settings. Turn on the router (ACT LED is blinking). Press the hole and keep for more than 5 seconds. When you see the ACT LED begins to blink rapidly than usual, release the button. Then the router will restart with the factory default configuration.
	Connector for a power cord. ON/OFF - Power switch.

The ports “P3 to P6” are switchable. It can be used for LAN connection or WAN connection according to the settings configured in WUI.

The ports “P3 to P6” are switchable. It can be used for LAN connection or WAN connection according to the settings configured in WUI.


Hardware Installation

This section will guide you to install the router through hardware connection and configure the router’s settings through web browser.

Connecting Device


Before starting to configure the router, you have to connect your devices correctly.

1. Connect a modem to any WAN port of Vigor1000B with Ethernet cable (RJ-45) to access Internet.
 2. Connect the other end of the cable (RJ-45) to the Ethernet port on your computer (that device also can connect to other computers to form a small area network). The LAN LED for that port on the front panel will light up.
 3. Connect a server/router (depends on your requirement) to any WAN port of Vigor1000B with Ethernet cable (RJ-45). The WAN LED will light up.
 4. Connect the power cord to Vigor1000B’s power port on the rear panel, and the other side into a wall outlet.
 5. Power on the device by pressing down the power switch on the rear panel. The PWR LED should be ON.
 6. The system starts to initiate. After completing the system test, the ACT LED will light up and start blinking.
- Below shows an outline of the hardware installation for your reference.

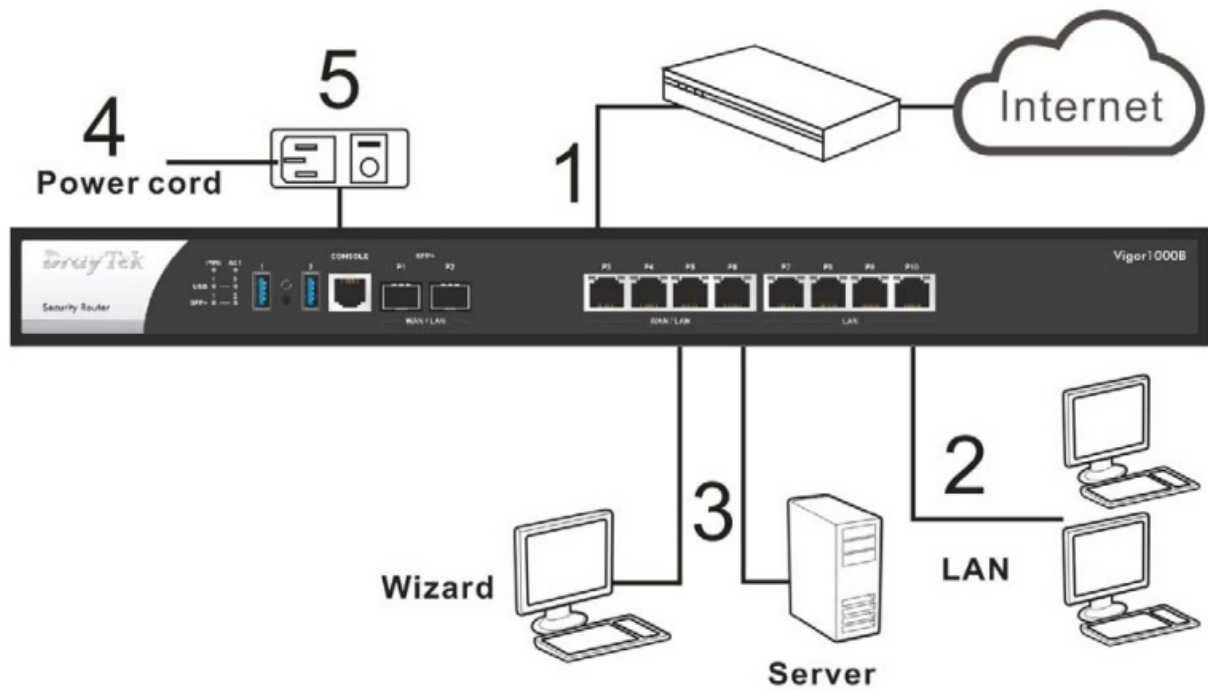


Rack-Mounted Installation

The Vigor1000B can be mounted on the shelf by using standard brackets shown below.



1. Fasten the rack mount kit on both sides of the Vigor router using specific screws.

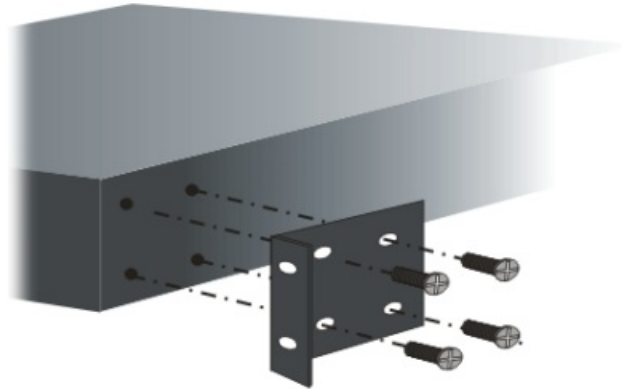

2. Then, install the Vigor router (with rack mount kit) on the 19-inch chassis by using other four screws.



Software Configuration


To access Internet, please finish basic configuration after completing the hardware installation.

Quick Start Wizard for Network Connection

Make sure your PC connects to the router correctly.

Note You may either simply set up your computer to get IP dynamically from the router or set up the IP address of the computer to be the same subnet as the default IP address of Vigor router 192.168.1.1. For the detailed information, please refer to – Trouble Shooting of the user's guide.

Open a web browser on your PC and type <http://192.168.1.1>. A pop-up window will open to ask for username and password. Please type “admin/admin” as the Username/Password and click Login.

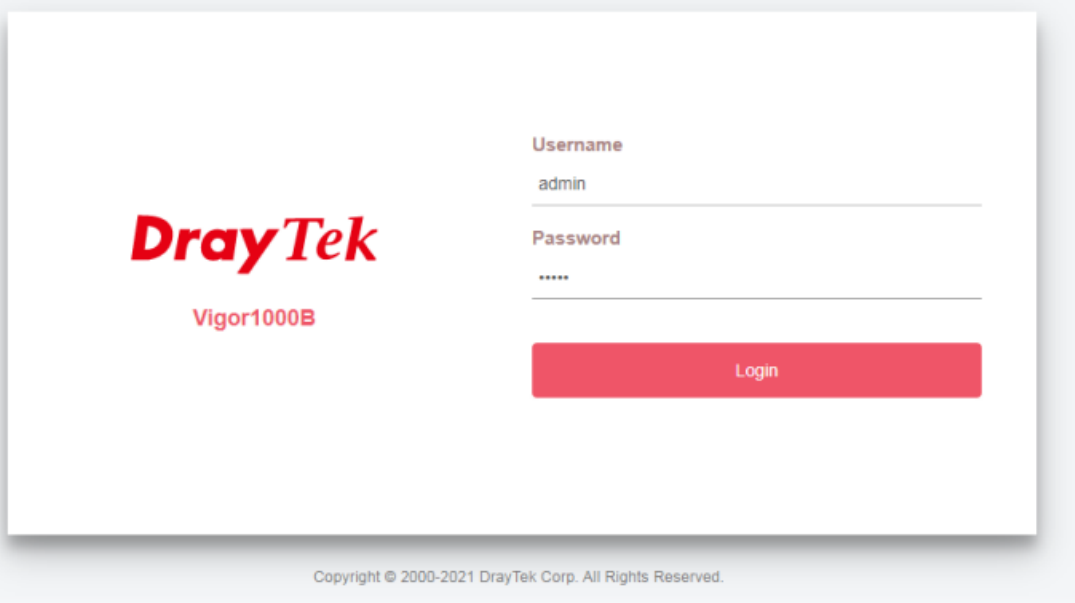

The image shows the login page for a DrayTek Vigor1000B router. On the left, the DrayTek logo is displayed in red, with 'Vigor1000B' in red text below it. On the right, there is a login form with two input fields: 'Username' and 'Password'. The 'Username' field contains the text 'admin'. The 'Password' field contains five asterisks '*****'. Below these fields is a red 'Login' button. At the bottom of the page, there is a copyright notice: 'Copyright © 2000-2021 DrayTek Corp. All Rights Reserved.'

Note If you fail to access to the web configuration, please go to “Trouble Shooting” on User's Guide for detecting and solving your problem.

Now, the Main Screen will pop up. Click Wizards>>Quick Start Wizard.



The image shows the main screen of the DrayTek Vigor 1000B Series web configuration interface. The interface is divided into several sections:

- Header:** DrayTek logo, Vigor 1000B Series, and a navigation bar with icons for Home, Dashboard, Configuration, Monitoring, and Tools.
- Left Sidebar:** A menu with options like Dashboard, Wizards, Online Status, Search Menu, Port Setup, WAN, LAN, Hotspot Web Portal, Routing, NAT, Firewall, User Management, Objects Setting, CSM, Bandwidth Management, Applications, VPN and Remote Access, Certificate Management, USB Application, System Maintenance, and Diagnostics. It also includes Central Management, AP, Switch, External Devices, MyVigor Services, Product Registration, and Service Status.
- Dashboard:** A central area showing system information, resources, and network status.
- System Information:** A table with details about the router, including Model Name (Vigor1000B), Router Name (DrayTek), FW /Loader Version (4.3.2.5/v27), LAN MAC Address (14-49-BC-14-C4-48), System Up Time (06:16:46), Current Time (Sat Jan 01 2000 06:18:08), and Build Date/Time (May 25 2023 11:23:39).
- System Resource:** A section showing CPU Usage (1%), Co-Proc CPU (1%), Memory Usage (64%), and Session (cur./max.): (N/A).
- IPv4 LAN Information:** A table showing IP Address and DHCP status for LAN1 (192.168.1.200/24, x).
- IPv4 Internet Access:** A table showing Line / Mode, IP Address, MAC Address, and Up Time for WAN1, WAN3, and WAN4.
- Quick Access:** A list of links for System Status, Dynamic DNS, TR-069, User Management, H&P2P Block, Schedule, SysLog / Mail Alert, LDAP, RADIUS, Firewall Object Setting, and Data Flow Monitor.
- Certificate Status:** A section showing the status of certificates, including Expired (0), Expire within 30 days (0), Unexpired (0), OK (0), and Not Valid Yet (0).

If your router can be under an environment with high speed NAT, the configuration provide here can help you to deploy and use the router quickly. The first screen of Quick Start Wizard is entering login password. After typing the password, please click Next.

Quick Start Wizard

Enter login password

Please enter an alpha-numeric string as your **Password** (Max 83 characters)

Old Password

New Password

Confirm Password

Password Strength: Weak Medium Strong

Strong password requirements:

1. Have at least one upper-case letter and one lower-case letter.
2. Including non-alphanumeric characters is a plus.

Hint: If you want to keep the password unchanged, leave the password blank and press "Next" button to skip this process.

< Back Next > Finish Cancel

On the next page as shown below, please select the WAN interface that you use. Then click Next for next step.

Quick Start Wizard

Select WAN Interface

Select WAN Interface:

Display Name:

Physical Mode: Ethernet

Physical Type:

< Back Next > Finish Cancel

You have to select the appropriate Internet access type (PPPoE, Static IP or DHCP) according to the information from your ISP. Here we take PPPoE and DHCP modes for WAN connection as examples.

For PPPoE Connection

1. Choose WAN3 as WAN Interface and click the Next button; you will get the following page.

Quick Start Wizard

Connect to Internet

WAN 3
Select one of the following Internet Access types provided by your ISP.

☒ PPPoE
☐ Static IP
☐ DHCP

[< Back](#) [Next >](#) [Finish](#) [Cancel](#)

2. Select PPPoE and click Next to get the following page.

Quick Start Wizard

PPPoE Client Mode

WAN 3
Enter the user name and password provided by your ISP.

Service Name (optional)

Username

Password

Confirm Password

[< Back](#) [Next >](#) [Finish](#) [Cancel](#)

3. Enter the Username/Password provided by your ISP. Then click Next for viewing the summary of such connection.

Quick Start Wizard

Please confirm your settings:

WAN Interface:	WAN3
Physical Mode:	Ethernet
Internet Access:	PPPoE

Click **Back** to modify changes if necessary. Otherwise, click **Finish** to save the current settings and restart the Vigor router.

[< Back](#) [Next >](#) [Finish](#) [Cancel](#)

4. Click Finish. A page of Quick Start Wizard Setup OK!!! will appear. Then, the system status of this protocol will be shown.

- **Quick Start Wizard Setup OK!**

5. Now, you can enjoy surfing on the Internet.

For DHCP Connection

1. Choose WAN3 as WAN Interface and click the Next button; you will get the following page.

Quick Start Wizard

Connect to Internet

WAN 3
Select one of the following Internet Access types provided by your ISP.

☐ PPPoE
☐ Static IP
☒ DHCP

< Back Next > Finish Cancel

2. Select DHCP and click Next to get the following page.

Quick Start Wizard

DHCP Client Mode

WAN 3
If your ISP requires you to enter a specific host name or specific MAC address, please enter it in.

Host Name (optional)
MAC - - - - - (optional)

< Back Next > Finish Cancel

3. Enter the hostname and / or MAC address provided by your ISP. Then click Next for viewing summary of such connection.

Quick Start Wizard

Please confirm your settings:

WAN Interface:	WAN3
Physical Mode:	Ethernet
Internet Access:	DHCP

Click **Back** to modify changes if necessary. Otherwise, click **Finish** to save the current settings and restart the Vigor router.

< Back

Next >

Finish

Cancel

4. Click Finish. A page of Quick Start Wizard Setup OK!!! will appear. Then, the system status of this protocol will be shown.

- **Quick Start Wizard Setup OK!**

5. Now, you can enjoy surfing on the Internet.

Customer Service

If the router cannot work correctly after trying many efforts, please contact your dealer for further help right away. For any questions, please feel free to send e-mail to support@draytek.com.

Be a Registered Owner

Web registration is preferred. You can register your Vigor router via <https://myvigor.draytek.com>.

Firmware & Tools Updates

Due to the continuous evolution of DrayTek technology, all routers will be regularly upgraded. Please consult the DrayTek website for more information on the newest firmware, tools and documents.

<https://www.draytek.com>

GPL Notice

This DrayTek product uses software partially or completely licensed under the terms of the GNU GENERAL PUBLIC LICENSE. The author of the software does not provide any warranty. A Limited Warranty is offered on DrayTek products. This Limited Warranty does not cover any software applications or programs.

To download source codes please visit:

- <http://gplsource.draytek.com>

GNU GENERAL PUBLIC LICENSE:

- <https://gnu.org/licenses/gpl-2.0>

- Version 2, June 1991

For any questions, please feel free to contact DrayTek technical support at support@draytek.com for further information.

Documents / Resources



[DrayTek V4.3.2.5 Vigor1000B Multi WAN Security Router](#) [pdf] User Guide
V4.3.2.5, V4.3.2.5 Vigor1000B Multi WAN Security Router, V4.3.2.5, Vigor1000B Multi WAN Security Router, Multi WAN Security Router, WAN Security Router, Security Router, Router

References

- [🌐 MyVigor - DrayTek](#)
- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.