



EDIMAX ES-1008PL 8 Port Fast Ethernet PoE Plus Switch Installation Guide

[Home](#) » [EDIMAX](#) » EDIMAX ES-1008PL 8 Port Fast Ethernet PoE Plus Switch Installation Guide 



Contents

- 1 ES-1008PL 8 Port Fast Ethernet PoE Plus Switch
- 2 COPYRIGHT
- 3 PRODUCT INTRODUCTION
- 4 Package Contents
- 5 Troubleshooting
- 6 Declaration of Conformity
- 7 Documents / Resources
 - 7.1 References

ES-1008PL 8 Port Fast Ethernet PoE Plus Switch

Edimax Technology Co., Ltd.
No.3, Wu-Chuan 3rd Road, Wu-Gu, New Taipei City 24891, Taiwan
Email: support@edimax.com.tw
Edimax Technology Europe B.V.
Fijenhof 2, 5652 AE Eindhoven, The Netherlands
Email: support@edimax.nl
Edimax Computer Company
3350 Scott Blvd., Bldg.15 Santa Clara, CA 95054, USA
Live Tech Support: 1(800) 652-6776
Email: support@edimax.com

COPYRIGHT

Copyright © Edimax Technology Co., Ltd. all rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission from Edimax Technology Co., Ltd.

Edimax Technology Co., Ltd. makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties, merchantability, or fitness for any particular purpose. Any software described in this manual is sold or licensed as is. Should the programs prove defective following their purchase, the buyer (and not this company, its distributor, or its dealer) assumes the entire cost of all necessary servicing, repair, and any incidental or consequential damages resulting from any defect in the software. Edimax Technology Co., Ltd. reserves the right to revise this publication and to make changes from time to time in the contents hereof without the obligation to notify any person of such revision or changes.

The product you have purchased and the setup screen may appear slightly different from those shown in this QIG. The specification is subject to change without notice. Please visit our web site www.edimax.com for the update. All brand and product names mentioned in this manual are trademarks and/or registered trademarks of their respective holders.

Edimax Technology Co., Ltd.

Add: No. 3, Wu-Chuan 3rd Rd., Wu-Ku Industrial Park, New Taipei City, Taiwan
Tel: +886-2-77396888
Email: sales@edimax.com.tw

PRODUCT INTRODUCTION

Model no.:

ES-1008PL: 8-Port Fast Ethernet PoE+ Switch

GS-1008PL: 8-Port Gigabit Ethernet PoE+ Switch

Package Contents

Before you start using this router, please check if there is anything missing in the package, and contact your dealer to claim the missing item(s):

- PoE switch x 1pcs
- Quick installation guide x 1pcs
- Power cord x 1pcs
- Rubber feet x 4pcs
- Rack-mount brackets and screws x 1 set

Safety Precautions

To avoid any device damage and bodily injury caused by improper use, please observe the following rules.


- Keep the power off during the installation.
- Wear an ESD-preventive wrist strap, and make sure that the wrist strap has a good skin contact and is well grounded.
- Use only the power cord provided with the Switch.
- Make sure that the supply voltage matches the specifications indicated on the rear panel of the Switch.
- Ensure the vent hole is well ventilated and unblocked.
- Do not open or remove the cover of the Switch.
- Before cleaning the device, cut off the power supply. Do not clean it by the waterish cloth, and never use any other liquid cleaning method.

Front Panel


Please refer to the following description for the front panel:

*ES-1008PL

*ES-1008PL

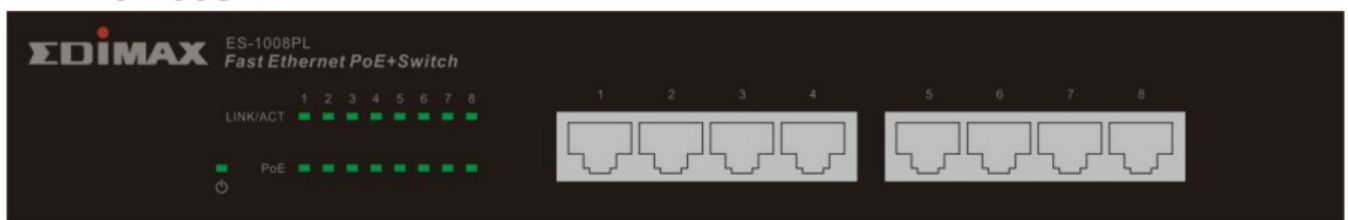

*GS-1008PL

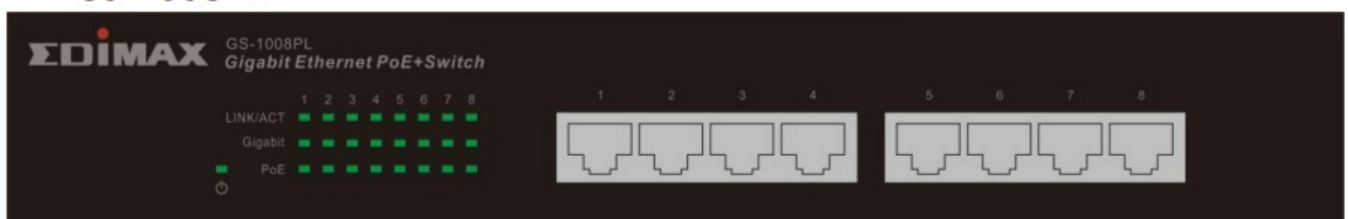

LED Definitions:

LED Name	Light Status	Description
PWR	On	Switch on and correctly powered
	Off	Switch not powered or not correctly powered
LINK/ACT	On	The port connected
	Off	The port not connected
	Flashing	The port is activating and transferring /receiving data.
Gigabit (GS-1008PL)	On	There is a 1000Mbps device connected to the corresponding port.
	Off	There is a 10/100Mbps device connected to the corresponding port, or there is no device connected to the corresponding port.
PoE	On	There is a PoE PD connected to the port, which supply power successfully.
	Off	No PD is connected to the corresponding port, or no power is supplied according to the power limits of the port.

Back Panel:



Power Connector:

Plug in the female connector of the provided power cord into this AC LINE socket, and the male into a power outlet. Supported input voltages range from 100-240V AC, and 50-60 Hz.

Product Specifications:

Model		ES-1008PL	I GS-1008PL
Standards		IEEE 802.3 1013aseT IEEE 802.3 10BaseT IEEE 802.3u 100BaseTX IEEE 802.3u 100BaseTX IEEE 802.3ab 1000BaseT IEEE 802.3af/802.3at PoE IEEE 802.3af/802.3at PoE IEEE 802.3x Flow Control IEEE 802.3x Flow Control IEEE 802.3az Energy Efficient IEEE 802.3az Energy Efficient Ethernet Ethernet	
Interface	RJ-45	8 ports	8 ports
	PoE	8 ports	8 ports
MAC Address		1K	8K
Buffer Memory		96KB	128KB
Jumbo Frames		N/A	9K
Total Power budget		80W	
Power Consumption		5 Watts (Max. no PD connected)	
Dimensions		280 x 179 x 44.5 (Lx W x H)	
Weight		15 kg	
Operating		0 to 40°C	
Storage Temperature		-40 to 70°C	
Humidity		Operating:10 to 90% RH (non-condensing)	

Note:

- PoE budget: Up to 30 Watts max per port, 75 Watts Total
- Please ensure you do not exceed the PoE power budget and overload the PoE switch.

For example:

	7.7W	15.4W	30W
Max. PoE ports (up to)	8 ports	4 ports	2 ports

* Make sure the PDs that you connected to the Switch are compliant with IEEE802.3af/IEEE802.3at standard.

1. PRODUCT INSTALLATION

There are two ways to install your switch, please select one that suits you.

2. Desktop Installation

1. Install the switch on a level surface that can support the weight of the unit and the relevant components, and attach the rubber feet to the bottom. The rubber feet cushion the switch and helps protect the case from

scratches.

2. Plug the switch into an electrical source with the provided power cord.

3. Rack-Mount Installation

Rack mounting allows for a more orderly installation when a series of network devices is being installed.

1. Disconnect all the cables from the switch.

2. Place the unit the right way up on a hard, flat surface with the front facing you.

3. Position a mounting bracket over the mounting holes on one side of the unit.

4. Insert the screws and fully tighten with a suitable screwdriver.

5. Repeat the two previous steps for the other side of the unit.

6. Insert the unit into the rack and secure with suitable screws

7. Reconnect all the cables.

Regarding the installation environment, we strongly recommend:

1. The switch should be placed in an appropriately ventilation environment. A minimum 25 mm space around the unit is recommended.
2. The switch and the relevant components should be kept away from sources of electrical noise such as radios, transmitters and broadband amplifiers.
3. Avoid environments with higher than recommended moisture levels.

Troubleshooting

1. Power LED is not lit

Check if the power cord is properly connected to the plug and the power outlet; make sure the power cord is firmly plugged into the power socket of the switch.



2. LINK/ACT LED is not lit when connected to devices

- Make sure the network device attached to the switch is turned on.
- Make sure the network cable is properly connected to the switch and the network device.
- Make sure the network cable is a UTP cable that complies with EIA/TIA 568 and Category 5 specifications.

[!] Contact your dealer if problem persist.

Appendix: The standard RJ-45 Introduction RJ45 Pin:

Below is an indication of a standard RJ-45 socket and plug, and definition for the pins.

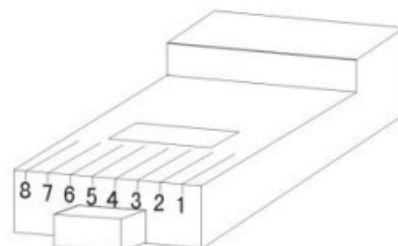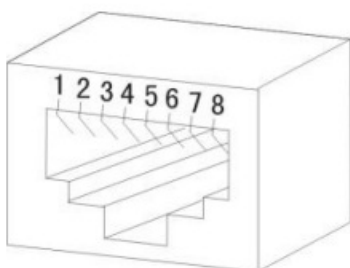


RJ-45 Connector pin signal:


RJ-45 Connector pin signal		
Pin no.	MDI-11 signal	MDI-X signal
1	TX+	RX+
2	TX-	RX-
3	RX+	TX+
4	POE-	POE –
5	POE-	POE –
6	RX-	TX-
7	POE +	POE +
8	POE +	POE +

The following shows straight cable and crossover cable connection, ordinary please use straight cable to connect switch/Hub or other devices:

Straight cable for the switch (uplink MDI-II port) to switch/Hub or other devices connection

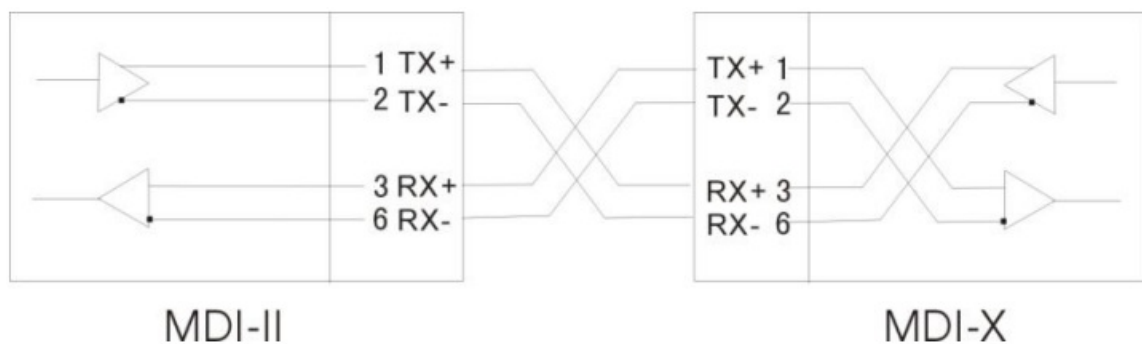

Cross over cable for switch (MDI-X port) to switch/hub or other network devices (MDI-X port) connection.

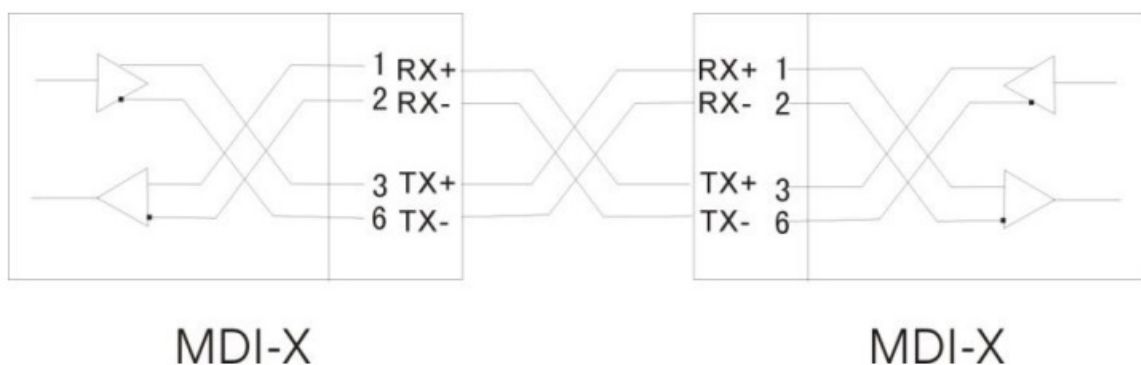

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio technician for help.

FCC Caution

This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the authority to operate equipment.

CE Mark Warning

This is a class B product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

EU Declaration of Conformity

This equipment is in compliance with the essential requirements and other relevant provisions of Directive 2004/108/EC and 2006/95/EC



WEEE Directive & Product Disposal



At the end of its serviceable life, this product should not be treated as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

Declaration of Conformity

We, Edimax Technology Co., LTD., declare under our sole responsibility, that the equipment described below complies with the requirements of the European Council directive (2004/108/EC and 2006/95/EC).

Equipment : 8-Port Fast/ Gigabit PoE+ Switch

Model No. : ES-1008PL / GS-1008PL

The following European standards for essential requirements have been followed:

EMC: ENS55022:2010

EN 55024:2010

EN 61000-3-2:2006 + A2:2009

EN 61000-3-3:2008

Safety (LVD): EN 60950-1:

2006+A11:2009+A1:2010+A12:2011

Edimax Technology Co., Ltd.

No. 3, Wu Chuan 3rd Road,

Wu-Ku Industrial Park,
New Taipei City, Taiwan

Date of Signature: July, 2014

Signature: 




Printed Name: Albert Chang



Title: Director Edimax Technology Co., Ltd.



Documents / Resources

	<p>EDIMAX ES-1008PL 8 Port Fast Ethernet PoE Plus Switch [pdf] Installation Guide ES-1008PL 8 Port Fast Ethernet PoE Plus Switch, ES-1008PL, 8 Port Fast Ethernet PoE Plus Switch, Fast Ethernet PoE Plus Switch, Ethernet PoE Plus Switch, PoE Plus Switch</p>
--	---

References

-  [EDIMAX - Networking Solution Provider including SMB Wi-Fi Access Point, AP Controller, SMB and Industrial PoE++ L2+ Switch, Industrial Embedded Wireless \(Wi-Fi, Bluetooth\) USB Dongle \(Adapter\), Wi-Fi Smart Plug, IoT, Smart Home](#)
-  [Manual-Hub.com - Free PDF manuals!](#)
- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.