



iClever IC-DK03 Combo Multi Device Connection Wireless Keyboard and Mouse Combo User Manual

[Home](#) » [iclever](#) » iClever IC-DK03 Combo Multi Device Connection Wireless Keyboard and Mouse Combo User Manual 

Contents

- [1 iClever IC-DK03 Combo Multi Device Connection Wireless Keyboard and Mouse Combo](#)
- [2 Keyboard Overview](#)
- [3 Mouse Overview](#)
- [4 Bluetooth Wireless Connection](#)
- [5 Mouse Pairing Instruction](#)
 - [5.1 Keyboard Keys and Functions](#)
- [6 FAQ's](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)




iClever IC-DK03 Combo Multi Device Connection Wireless Keyboard and Mouse Combo




Package Contents

- 1 x Dual Mode Keyboard
- 1 x Dual Mode Mouse
- 1x 2.4G USB Receiver (for 2.4G connection)



- 1x USB Charging Cable
- 1 x User Manual

Keyboard Overview

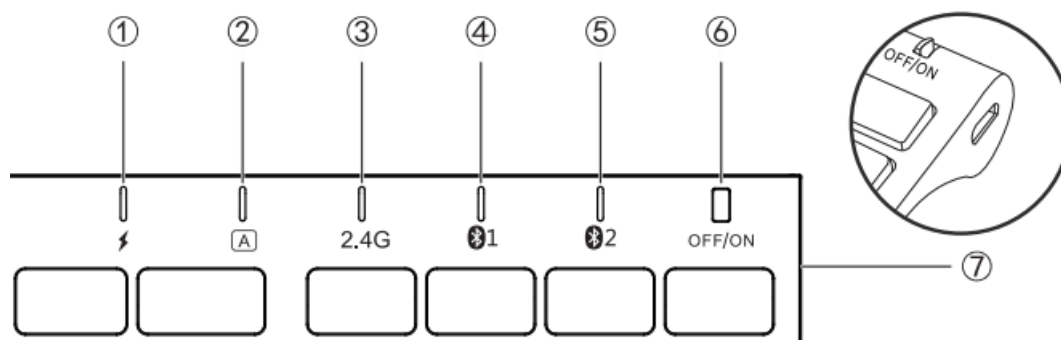

1. Charging Indicator: stay in red when charging and turn green after fully charged (about 2 hours fully charged).

Caps lock Indicator & Battery Checking:


2. Caps lock Indicator:

press the “caps lock” key to switch between uppercase and lowercase. Battery Checking:

press the “F6” or “Fn” + “F6” key to check the battery status; the indicator light flashes once, twice, three times, and four times to indicate that the battery is less than 25%, 50%, 75%, and 100%.


3. 2.4G Wireless Channel Indicator: turn green for 3s after switching to the 2.4G wireless mode.
4. Bluetooth Channel Indicator: to indicate the Bluetooth channel 1/2.
5. Power Switch: slide right to turn on and left to turn off.
6. Charging Port: for charging.

Mouse Overview

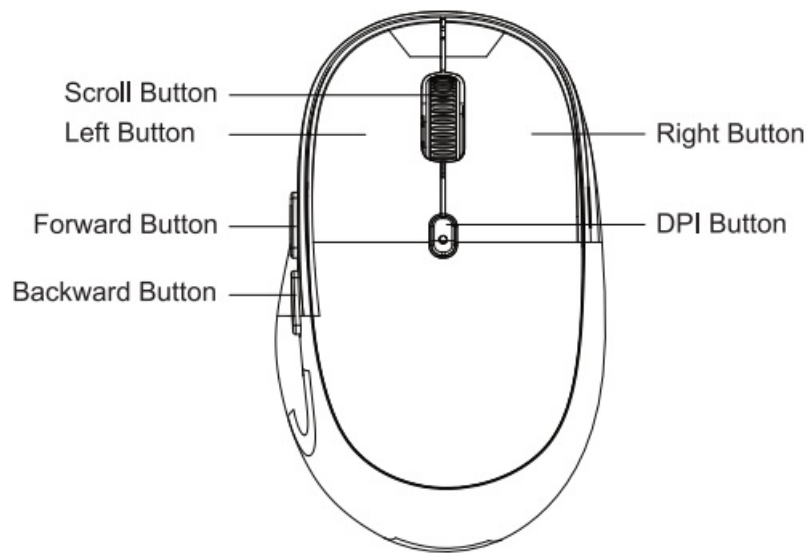

Note:

Backward and Forward buttons are not working in iOS and Mac OS.

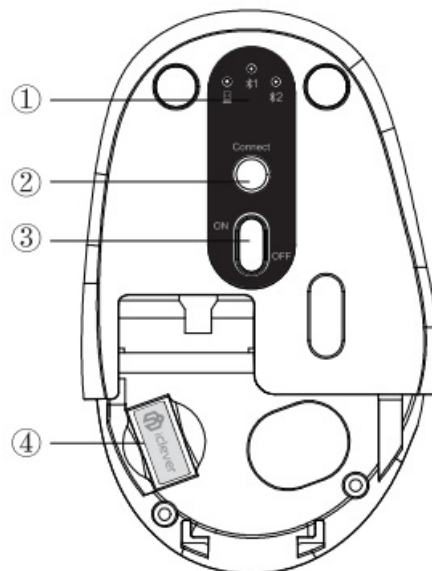

1. **2.4G/BT1/BT2 Indicator:** to indicate the connection channel status.
2. **Connect Button:** click this button to switch between the 2.4G/Bluetooth 1 and Bluetooth 2 channels. Hold and press this button for 5s to Bluetooth pairing mode when in the BT1/BT2 channel.
3. **ON/OFF Switch:** slide “ON” J “OFF” to turn on/off the mouse.
4. **Storage Slot:** used to store the USB receiver (USB Receiver is in here)

Specifications for the Mouse

Connection	2.4G Wireless and Bluetooth
Operating distance DPI	< Sm 126ft 800-1200-1600-2400
Dimensions	105"64"39mm / 4.13"2.52"1.54in
Lithium battery capacity	300 mAh
Charge time	< 2 hours
Uninterrupted working time	40 hours
Compatibility	Windows, Mac OS, iOS, Android

"Frequency band: 2403 MHz-2480 MHz

"Maximum transmission power: 0 dBm


Specifications for the Keyboard

Connection	2.4G Wireless and Bluetooth
Operating distance	< Bm f 26ft
Dimensions	428"125"16mm / 16.85 "4.92 "0.63in
Lithium battery capacity	280 mAh
Charge time	< 2 hours
Uninterrupted working time	90 hours
Compatibility	Windows, Mac OS, iOS, Android


"Frequency band: 2402 MHz-2480 MHz

"Maximum transmission power: 0 dBm

Keyboard Pairing Instruction

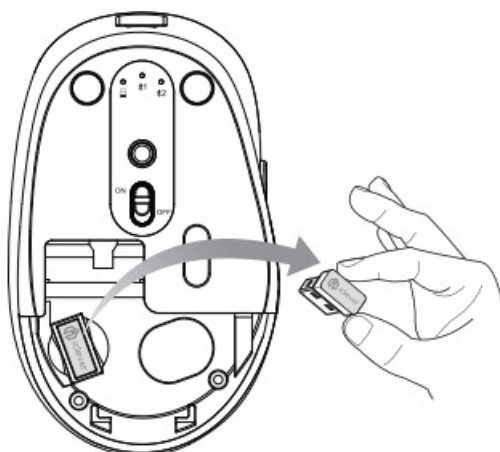


2.4G Wireless Connection


- Step 1 . Remove the USB Receiver from the bottom of the mouse
- Step 2. Plug the 2.4G USB receiver into the port of the computer.
- Step 3. Slide the power switch right to power on the keyboard.
- Step 4. Press the key to  switch to 2.4G wireless mode.
- Step 5. Press the “fn” + “Q”/“W” keys to choose the right system. (fn+Q is for iOS and Mac OS, and fn+W is for Windows and Android)

Bluetooth Wireless Connection

Pair with 1st device

- Step 1. Slide the power switch right to power on the keyboard.
- Step 2. Hold and press the key of  3 for 5 seconds to pairing mode in channel 1, and the Bluetooth channel 1 indicator will quickly flash blue and start to search for the available Bluetooth device.
- Step 3. On your Bluetooth device, find the Bluetooth name “iClever IC-DK03 KB” and click to connect it.
- Step 4. The Bluetooth channel indicator will be off after successfully paired.
- Step 5. Press the “fn” + “Q”/“W” keys to choose the right system. (fn+Q is for iOS and Mac OS, and fn+W is for Windows and Android)

Pair with 2nd device

- Step 1. Hold and press the key  for 5 seconds to pairing mode in channel 2, and the Bluetooth channel 2 indicator will quickly flash blue and start to search for the available Bluetooth device.
- Step 2. On your Bluetooth device, find the Bluetooth name “iClever IC-DK03 KB” and click to connect it.
- Step 3. The Bluetooth channel indicator will be off after successfully paired.
- Step 4. Press the “fn” + “Q”/“W” keys to choose the right system. (fn+Q is for iOS and Mac OS, and fn+W is for Windows and Android)

Details of connection settings for the different system devices:

- **For Windows 10 PC/laptop:**

Click Win > Setting > Devices> Bluetooth & other devices > Add Bluetooth or another device> Bluetooth > click “iClever IC-DK03 KB” to connect.

- **For MacBook/iMac:**

Click System Preferences> Bluetooth > click “iClever IC-DK03 KB” to connect.

- **For iPad & iPhone:**




Click Setting> Bluetooth > click “iClever IC-DK03 KB” to connect.

Notes:





- Auto re-connect function: the keyboard will connect with the last-used device automatically.
- Do not connect it via a Bluetooth adapter.

- If fail to connect, please read the FAQ.

Switch among connected devices.

Press  /  /  key to switch among the connected devices.

Repair the channel that is already connected

- Step 1. Press the  /  key to choose the Bluetooth Channel.
- Step 2. Hold and press  /  for 5s to re-pair.

Pair with 2nd device

- Step 1. Hold and press the key of EI for 5 seconds to pairing mode in channel 2, and the Bluetooth channel 2 indicator will quickly flash blue and start to search for the available Bluetooth device.
- Step 2. On your Bluetooth device, find the Bluetooth name “iClever IC-DK03 KB” and click to connect it.
- Step 3. The Bluetooth channel indicator will be off after successfully paired.
- Step 4. Press the “fn” + “Q” W” keys to choose the right system. (fn+Q is for iOS and Mac OS, and fn+W is for Windows and Android)

Details of connection settings for the different system devices:

- **For Windows 10 PC/laptop:**

Click Win > Setting > Devices> Bluetooth & other devices > Add Bluetooth or another device> Bluetooth > click “iClever IC-DK03 KB” to connect.

- **For MacBook/iMac:**

Click System Preferences> Bluetooth > click “iClever IC-DK03 KB” to connect.

- **For iPad & iPhone:**

Click Setting> Bluetooth > click “iClever IC-DK03 KB” to connect.

Notes:

- Auto re-connect function: the keyboard will connect with the last-used device automatically.
- Do not connect it via a Bluetooth adapter.
- If fail to connect, please read the FAQ.

Switch among connected devices.

Press the key to switch among the connected devices.

Repair the channel that is already connected

- Step 1. Press the key to choose the Bluetooth Channel.
- Step 2. Hold and press for 5s to repair.

Mouse Pairing Instruction

2.4G Wireless Connection

- Step 1. Remove the USB Receiver from the bottom of the mouse.
- Step 2. Plug the 2.4G USB receiver into the port of the computer.
- Step 3. Slide the mouse ON/OFF switch to “ON” to turn on the mouse.
- Step 4. On the bottom of the mouse, click the “Connect” button to choose the 2.4G channel.

Bluetooth Connection

Pair with 1st device

- Step 1. Slide the mouse ON/OFF switch to “ON” to turn on the mouse.
- Step 2. On the bottom of the mouse, click the “Connect” button to choose the BT1 channel.
- Step 3. Hold and press the “Connect” button for 5 seconds to pairing mode in BT1 Channel, and the indicator will keep flashing.
- Step 4. On your device, find “iClever Mouse” and click to connect it.

Pair with 2nd device

- Step 1. Slide the mouse ON/OFF switch to “ON” to turn on the mouse.
- Step 2. On the bottom of the mouse, click the “Connect” button to choose the BT2 channel.
- Step 3. Hold and press the “Connect” button for 5 seconds to pairing mode in BT2 Channel, and the indicator will keep flashing.
- Step 4. On your device, find “iClever Mouse” and click to connect it.

Switch among connected devices













Click the “Connect” button to switch among the connected devices.


Repair the channel that is already connected












1. Step 1. Click the connect” button to choose the BT1/BT2 channel.
2. Step 2. Hold and press the “Connect” button for 5s until the BT1/BT2 channel indicator keeps flashing.
3. Step 3. On your device, find “iClever Mouse” and click to connect it.

Keyboard Keys and Functions

Before using, please ensure that you already choose the right system: fn + Q is for iOS and Mac OS and fn +W is for Windows and Android.

Key Icon	iOS	Android	Windows	Mac OS	Windows & Mac OS
Way to use	Press F-keys directly	Press F-keys directly	Press F-keys directly	Press F-keys directly	Press fn+ F1~f12
	Brightness -	Brightness -	Brightness - (Windows 10)	Brightness -	F1
	Brightness +	Brightness +	Brightness + (Windows 10)	Brightness +	F2
	N/A	Home or N/A	Web browser	Mission control	F3
	Switch apps (not working for iPhone)	Switch apps	Switch apps	Switch apps	F4
	Search	Search in browser or N/A	Search	Search	F5
	Battery capacity checking	Battery capacity checking	Battery capacity checking	Battery capacity checking	F6
	Previous track	Previous track	Previous track	Previous track	F7
	Play/pause	Play/pause	Play/pause	Play/pause	F8
	Next track	Next track	Next track	Next track	F9
	Mute	Mute	Mute	Mute	F10
	Volume -	Volume -	Volume -	Volume -	F11
	Volume +	Volume +	Volume +	Volume +	F12

Your keyboard has by default access to the Media and Hotkeys such as Volume Up, Play/Pause, Volume Down, and so on. If you prefer to have direct access to your F-keys simply press  on your keyboard to swap them.

Special Key	Description
	Works as screenshot (may not work for Android).
	Switch function: press this key to 2.4G mode.
	Switch function: press this key to Bluetooth channel 1. Pairing function: hold and press this key for 5 seconds and the Bluetooth channel 1 indicator will quickly flash blue and start to search for the available Bluetooth device.
	Switch function: press this key to Bluetooth channel 2. Pairing function: hold and press this key for 5 seconds and the Bluetooth channel 2 indicator will quickly flash blue and start to search for the available Bluetooth device.
	For Mac&iOS users, your keyboard has by default access to the Media and Hotkeys such as Volume Up, Mute, Volume down, and so on. If you prefer to have direct access to F-keys simply press this key to swap them.
	If your system is Mac or iOS, press fn + this key to Mac layout.
	If your system is Windows or Android, press fn + this key to Windows Layout.
	It works as "win" when your system switch to Windows layout. It works as "option" when the system switch to Mac layout.
	It works as "alt" when your system switch to Windows layout. It works as "cmd" when your system switch to Mac layout.
	It works as input method change. <u>(note: works for Win10, iOS, and Mac only)</u>
	It works as "number lock" when your system is Windows. It works as "clear" when your system is Mac. <u>(note: not works for iOS and Android)</u>

Sleep Mode

- The keyboard will enter sleep mode if idle for 30 minutes.
- Press any key to exit sleep mode and wait for 3 seconds.

Charge the Device

It is recommended to use our included charging cable to directly connect with the computer interface. If you prefer to connect the charging cable with an adapter, before to use, please check your adapter voltage is lower than 5V.

- Output: DC 5V/200mA; USB charger is not included.
- In the charging, the indicator will stay red while charging, and it will light up green when fully charged.
Generally, it takes about 2 hours to get fully charged.

Compatibility

1. For Bluetooth Compatibility: Mac, Android, iOS, Windows 8/8.1/10 PC and laptop with Bluetooth host.

Note: it is not fully compatible with Mac mini smart TV and Xbox.


2. For 2.4G Wireless Compatibility: Windows 7/8/8.1/10 PC, and laptop.

Tips

- Keep away from oil, chemicals, liquid, and snacks.
- Keep away from sharp objects.
- Keep away from metal and other sources of wireless signal.

FAQ's

My keyboard fails to connect to 2.4G Mode

1. Ensure you already plugged the USB Receiver into the USB port.
2. Ensure you already press the key of .
3. Verify the product or receiver is connected directly to the computer and not to a hub, extender, switch, or something similar.
4. Charge the keyboard for 2 hours.
5. Move the receiver to a different USB port on your computer.
6. Try moving away at least 8 inches (20 cm) from metal and other sources of wireless signal. Try moving away from:
 - Any device that could emit wireless waves: Microwave, cordless phone, baby monitor, wireless speaker, garage door opener, WiFi router
 - Computer power supplies
 - Metal or metal wiring in the wall
7. Try on a different computer or email us.








MY keyboard fails to connect to Bluetooth mode

1. Charge the keyboard for 2 hours.
2. Make sure that your iClever device and computer are within proximity of each other.
3. Try moving away at least 8 inches (20 cm) from metal and other sources of wireless signal.
4. Delete all the Bluetooth connection records. (For example for iPad click "Settings" > "Bluetooth" > under "MY DEVICE" to delete all the Bluetooth connection records/
5. On your device, turn off the Bluetooth and turn it on again to Refresh. (For example for iPad click "Settings"> "Bluetooth" > if the on-screen switch beside Bluetooth currently shows as ON tap it twice to refresh it)
6. Connect it again or email us.

Is this keyboard fully compatible with Macbook/iMac?

No, it is not fully compatible. The keys of    are not working for Macbook and iMac.

Is this keyboard fully compatible with iPhone/iPad?

No, it is not fully compatible. The keys        are not working for iPhones and iPads.

Delay when typing or frequently net disconnected

1. Restart your Bluetooth device.
2. Charge the keyboard for 2 hours.
3. Keep the keyboard and computer within proximity of each other.
4. Try moving away at least 8 inches from:

My devices that could emit wireless waves: Microwave, cordless phone, baby monitor, wireless speaker, garage door opener, WiFi router

Computer power supplies, Metal or metal wiring in the wall

5. Do not use your wireless keyboard on metal surfaces.
6. Check if any updates are running in the background that may cause the delay.
7. Check your computer memory, insufficient memory may cause a delay.
8. Try on a different APP/device to connect.

If the problem persists you will need to follow specific steps based on your device OS. Please email us to get advanced troubleshooting.

How to fix keyboard typing multiple letters on Windows 10/7

Turn on the Filter Keys:

Click the win key > Settings > Ease of Access > Keyboard > find "Use Filter Keys", and turn it on.

How to fix the keyboard typing multiple letters on Mac?

1. On a Mac, choose the Apple menu > "System Preferences", click Keyboard", and choose the Keyboard tab.
2. Locate the "Key Repeat" slider setting and adjust it to the "Off" position.

Keyboard/Mice – Buttons or keys do not work correctly.

1. Restart your PC/laptop and iClever Keyboard/mouse.
2. Clean the button/key with compressed air.
3. Verify the product or receiver is connected directly to the computer and not to a hub, extender, switch, or something similar.
4. Unpair/repair or disconnect/reconnect hardware.
5. Windows only – try a different USB port.
6. Try on a different USB port or a different computer.

The cursor does not follow mouse movements.

1. Use a mouse pad
2. Avoid using your mouse on Glass and other see-through surfaces, Reflective surfaces, such as mirrors and metal desks, and grooved surfaces.
3. Try the mouse on a piece of white paper to make sure it isn't a tracking issue on the particular surface you're using.

Keyboard stop working

1. Charge the keyboard for 2 hours.
2. Keep the keyboard and computer within proximity of each other.
3. Try moving away at least 8 inches from:
Any device that could emit wireless waves: Microwave, cordless phone, baby monitor, wireless speaker, garage door opener, WiFi router
Computer power supplies, Metal or metal wiring in the wall
4. Do not use your wireless keyboard on metal surfaces.
5. Try on a different device to connect.
6. Contact us.

Miss the USB Receiver.

1. The USB Receiver is located at the bottom of the mouse storage Slot. Please open the cover to get the USB Receiver.
2. Only one USB Receiver is included and both work for the keyboard and mouse.

EU Declaration of Conformity

Hereby, [Thousandshores Deutschland GmbH] declares that the radio equipment type [Wireless Keyboard and Mouse Combo IC-DK03 Combo] complies with Directive 2014/53/EU. The full text of the EU declaration conformity is available at the following internet address: <http://files.iclever.com/ic-dk03combo-uk-doc.pdf>


UK Declaration of Conformity

To learn more about the UK Declaration of Conformity, please check the below link: <http://files.iclever.com/ic-dk03combo-uk-doc.pdf>

Contact

Email support@iclever.com

Documents / Resources

	iClever IC-DK03 Combo Multi Device Connection Wireless Keyboard and Mouse Combo [pdf] User Manual IC-DK03 Combo Multi Device Connection Wireless Keyboard and Mouse Combo, IC-DK03, Combo Multi Device Connection Wireless Keyboard and Mouse Combo, Connection Wireless Keyboard and Mouse Combo, Wireless Keyboard and Mouse Combo, Mouse Combo, Combo
---	---

References

- [User Manual](#)

