

## INTELBRAS

WC 7060 Series  
Access  
Controllers



# INTELBRAS WC 7060 Series Access Controllers Owner's Manual

[Home](#) » [intelbras](#) » INTELBRAS WC 7060 Series Access Controllers Owner's Manual 

## Contents

- [1 INTELBRAS WC 7060 Series Access Controllers](#)
- [2 Product overview](#)
- [3 Removable components](#)
- [4 Power supply views](#)
- [5 Fan trays](#)
- [6 Ports and LEDs](#)
- [7 Cooling system](#)
- [8 Documents / Resources](#)
  - [8.1 References](#)
- [9 Related Posts](#)

# INTELBRAS

## INTELBRAS WC 7060 Series Access Controllers



Product overview

Product models

This document is applicable to the WC 7060 series access controllers. Table1-1 describes the WC 7060 series access controller models.  
Table1-1 WC 7060 series access controller models

Product series	Product code	Model	Remarks
WC 7060 series	WC 7060	WC 7060	Non-PoE model

Technical specifications


Table1-2 Technical specifications

Item	Specification
Dimensions (H × W × D)	88.1 × 440 × 660 mm (3.47 × 17.32 × 25.98 in)
Weight	< 22.9 kg (50.49 lb)
Console port	1, control port, 9600 bps
USB port	2 (USB2.0)
Management port	1 × 100/1000BASE-T management Ethernet port
Memory	64GB DDR4
Storage media	32GB eMMC memory
Rated voltage range	<ul style="list-style-type: none"><li>LSVM1AC650: 100 VAC to 240 V AC; 50 or 60 Hz</li><li>LSVM1DC650: −40VDC to −60 VDC</li></ul>
System power consumption	< 502 W
Operating temperature	0°C to 45°C (32°F to 113°F)
Operating humidity	5% RH to 95% RH, noncondensing

Chassis views

WC 7060  
Front, rear, and side views

Figure1-1 Front view

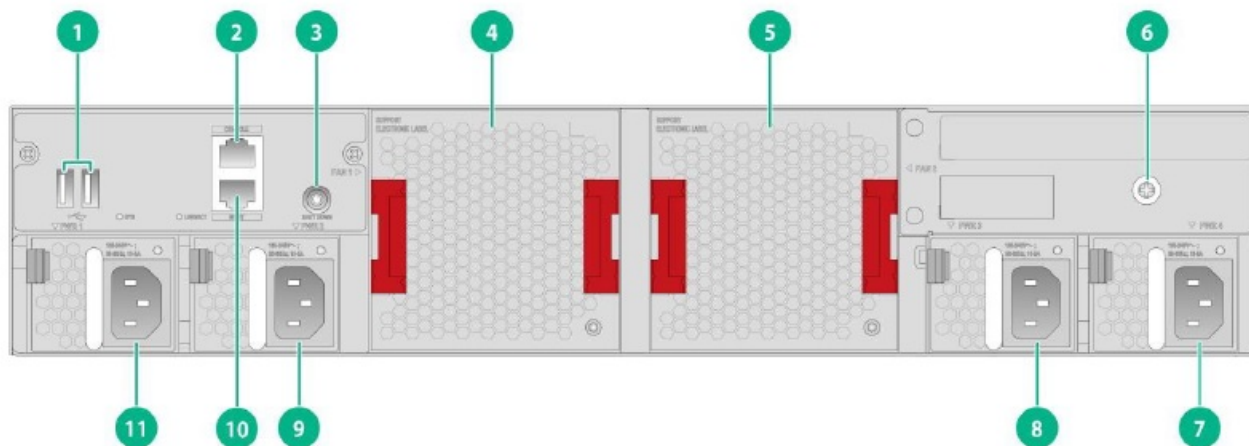


(1) USB ports	(2) Serial console port
(3) SHUT DOWN button LED	(4) Fan tray 1
(5) Fan tray 2	(6) Grounding screw (auxiliary grounding point 2)
(7) Power supply 4	(8) Power supply 3
(9) Power supply 2	(10) Management Ethernet port
(11) Power supply 1	

#### NOTE:

Pressing the SHUT DOWN button LED for more than 15 milliseconds powers on the device. If you press and hold the button LED for more than 2 seconds, the LED is fast flashing at 1 Hz. You must wait for the device to notify the x86 operating system to shut down, and you can power off the device only when the LED turns off

**Figure1-2 Rear view**

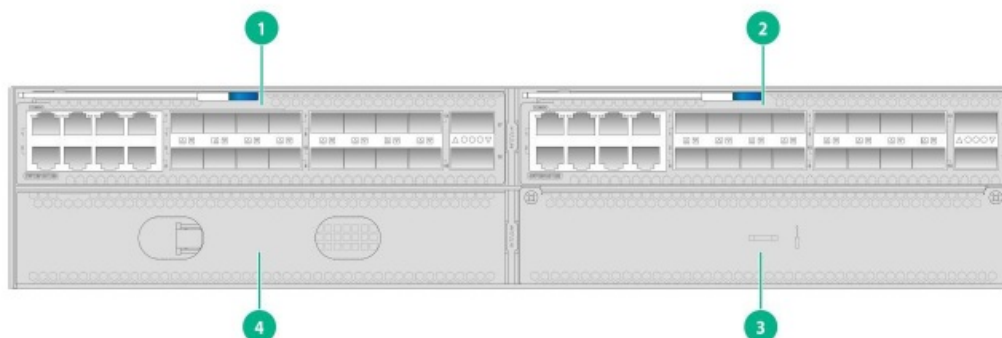

(1) Expansion slot 1	(2) Expansion slot 2
(3) Expansion slot 4 (reserved)	(4) Expansion slot 3 (reserved)

The device comes with expansion slot 1 empty and the other expansion slots each installed with a filler panel. You can install expansion modules only in expansion slots 1 and 2. Expansion slots 3 and 4 are reserved. You can install one to two expansion modules for the device as required. In Figure1-2, expansion modules are installed in two expansion module slots.


The device comes with power supply slot PWR1 empty and the other three power supply slots each installed with a filler panel. One power supply can meet the power requirement of the device. You can also install two, three, or four power supplies for the device to achieve 1+1, 1+2, or 1+3 redundancy, respectively. In Figure1-1, four power supplies are installed in the power supply slots.

The device comes with the two fan tray slots empty. In Figure1-1, two fan trays are installed in the fan tray slots.

**CAUTION:**

- Do not hot swap expansion modules. Hot swapping expansion modules restarts the device. Please be cautious.
- To ensure adequate heat dissipation, you must install two fan trays for the device.

**Figure1-3 Side view**

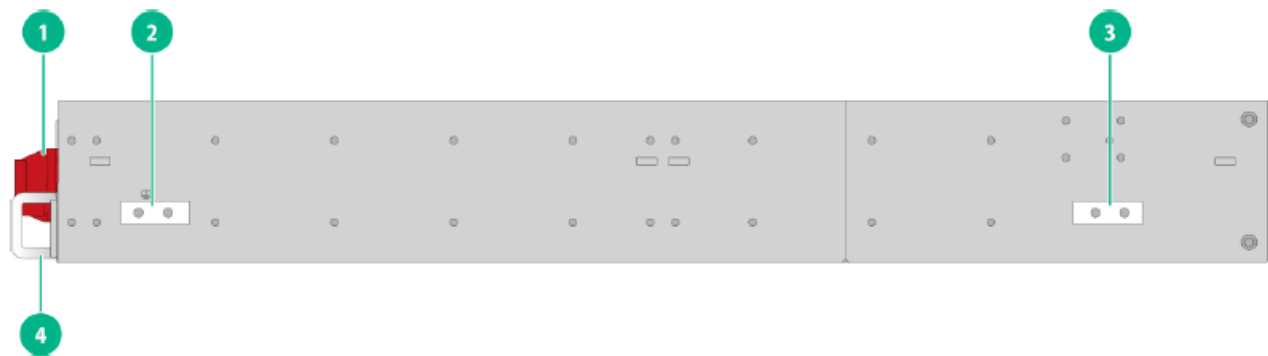


(1) Fan tray handle	(2) Primary grounding point
(3) Auxiliary grounding point	(4) Power supply handle

**LED locations**


The device in the following figures is fully configured with AC power supplies, fan trays, and expansion modules.

**Figure1-4 Front panel LED locations**

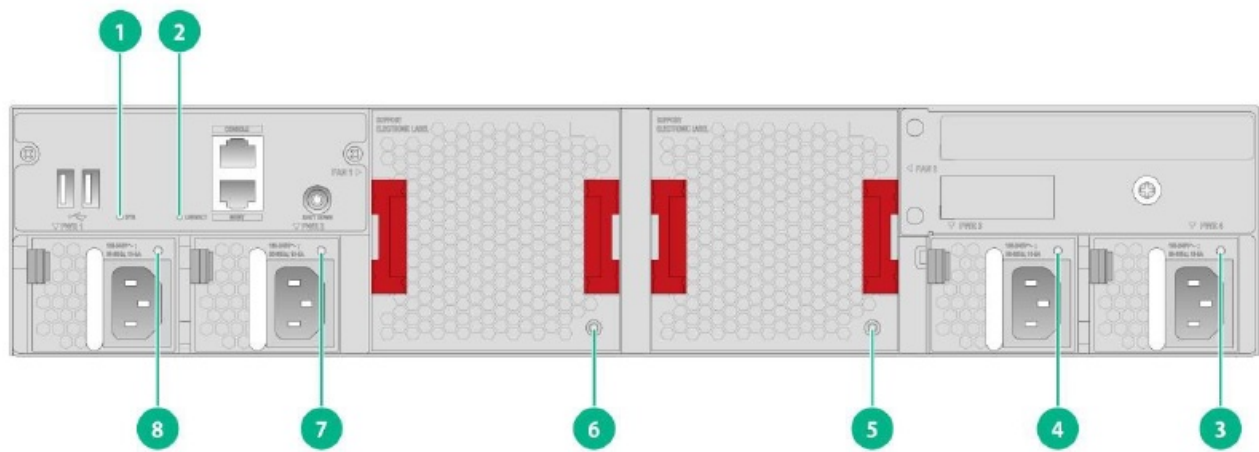

(1) System status LED (SYS)	(2) Management Ethernet port LED (LINK/ACT)
(3) Power supply status LEDs (3, 4, 7, and 8)	(4) Fan tray status LEDs (5 and 6)

Figure1-5 Rear panel LED locations

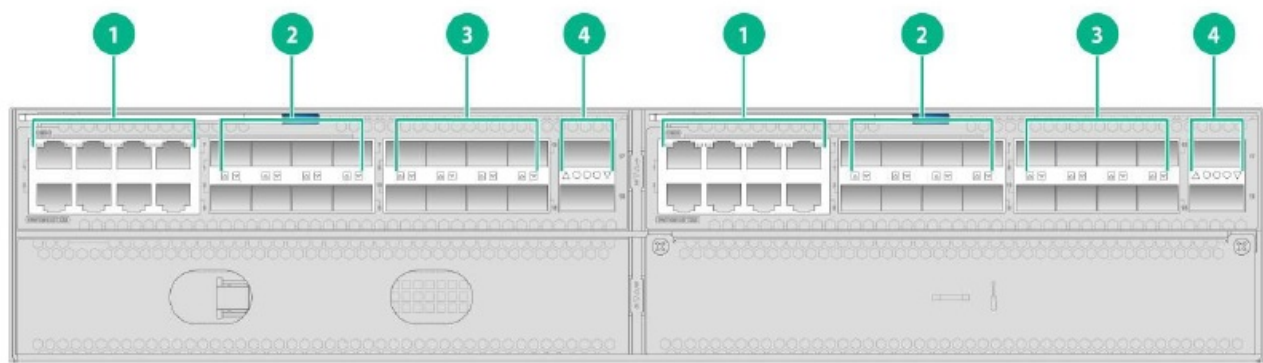

(1) 1000Base-T Ethernet port LEDs	(2) SFP port LEDs
(3) 10G SFP+ port LEDs	(4) 40G QSFP+ port LEDs

Removable components

Removable components and compatibility matrixes  
The access controllers use modular design. Table2-1 describes the compatibility matrix between access controllers and removable components.  
Table2-1 Compatibility matrix between access controllers and removable components

Removable components	WC 7060
Removable power supplies	
LSVM1AC650	Supported
LSVM1DC650	Supported
Removable fan trays	
LSWM1BFANSCB-SNI	Supported
Expansion modules	
EWPXM1BSTX80I	Supported

Table2-2 describes the compatibility matrix between expansion modules and expansion slots. Table2-2  
Compatibility matrix between expansion modules and expansion slots

Expansion module	WC 7060	
	Slot 1	Slot 3
	Slot 2	Slot 4
EWPXM1BSTX80I	Supported	N/A

The power supplies support asset management. You can use display device manuinfo command to view the name, sequence number, and vendor of the power supply you have installed on the device.

Power supplies

## Power supply specifications

### WARNING!


When the device has power supplies in redundancy, you can replace a power supply without powering off the device. To avoid device damage and bodily injury, make sure the power supply is powered off before you replace it.

**Table2-3 Power supply specifications**

Power supply model	Item	Specification
PSR650B-12A1	Product code	LSVM1AC650
	Rated AC input voltage range	100 to 240 VAC @ 50 or 60 Hz
	Output voltage	12 V/5 V
	Max output current	52.9 A (12 V)/3 A (5 V)
	Max output power	650 W
	Dimensions (H × W × D)	40.2 × 50.5 × 300 mm (1.58 × 1.99 × 11.81 in)
	Operating temperature	−5°C to +50°C (23°F to 122°F)
	Operating humidity	5% RH to 95% RH, noncondensing
PSR650B-12D1	Product code	LSVM1DC650
	Rated DC input voltage range	−40 to −60 VDC
	Output voltage	12 V/5 V
	Max output current	52.9 A (12 V)/3 A (5 V)
	Max output power	650 W
	Dimensions (H × W × D)	40.2 × 50.5 × 300 mm (1.58 × 1.99 × 11.81 in)
	Operating temperature	−5°C to +45°C (23°F to 113°F)
	Operating humidity	5% RH to 95% RH, noncondensing

## Power supply views

Figure2-1 LSVM1AC650& LSVM1DC650

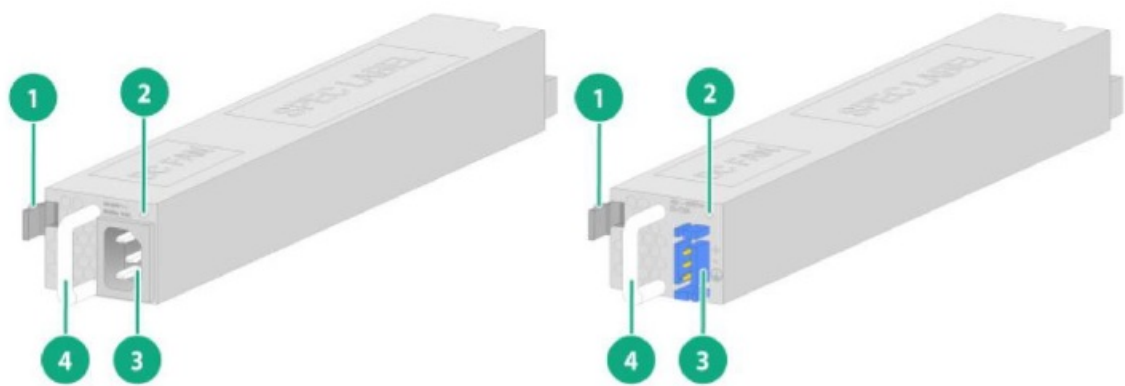

(1) Latch	(2) Status LED
(3) Power input receptacle	(4) Handle

Fan trays


Fan tray specifications

Table2-4 Fan tray specifications

Fan tray model	Item	Specification
LSWM1BFANSCB-SNI	Dimensions (H × W × D)	80 × 80 × 232.6 mm (3.15 × 3.15 × 9.16 in)
	Airflow direction	Air exhausted from the fan tray faceplate
	Fan speed	13300 R.P.M
	Max airflow	120 CFM (3.40 m3/min)
	Operating voltage	12 V
	Max power consumption	57 W
	Operating temperature	0°C to 45°C (32°F to 113°F)
	Operating humidity	5% RH to 95% RH, noncondensing
	Storage temperature	−40°C to +70°C (−40°F to +158°F)
	Storage humidity	5% RH to 95% RH, noncondensing

Fan tray views

Figure2-2 LSWM1BFANSCB-SNI

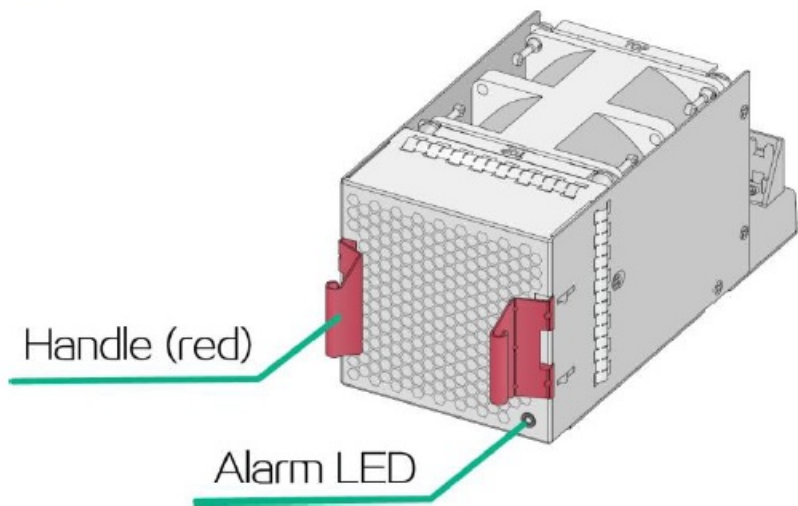

Expansion modules

Expansion module specifications


Table2-5 Expansion module specifications

Expansion module model	Item	Specification
EWPXM1BSTX80I	Name	Hardware acceleration module
	Port quantity and types	<ul style="list-style-type: none"><li>8 × 1000BASE-T Ethernet ports</li><li>8 × GE SFP fiber ports</li><li>8 × 10GE SFP+ fiber ports</li><li>2 × 40GE QSFP+ fiber ports</li></ul> <p>Note:</p> <p>The 1000BASE-T Ethernet ports and GE SFP fiber ports are combo interfaces.</p> <p>Do not use 10GBASE-R-SFP+ fiber ports and 40GBASE-R-QSFP+ fiber ports simultaneously.</p>
	Port specifications	<ul style="list-style-type: none"><li>For detailed information about 1000BASE-T Ethernet ports, see <a href="#">Table3-10</a>.</li><li>For information about SFP modules supported by the SFP fiber ports, see <a href="#">Table3-4</a>.</li><li>For information about SFP+ modules and cables supported by the SFP+ fiber ports, see <a href="#">Table3-6</a>.</li><li>For information about QSFP+ modules and cables supported by the QSFP+ fiber ports, see <a href="#">Table3-8</a>.</li></ul>
	Power consumption	82.3W~110.4W
	Dimensions (H × W × D)	40.1 × 214 × 274.2 mm (1.58 × 8.43 × 10.80 in)
	Weight	1.9kg (4.19 lb)

Expansion module views



Figure2-3 Front panel

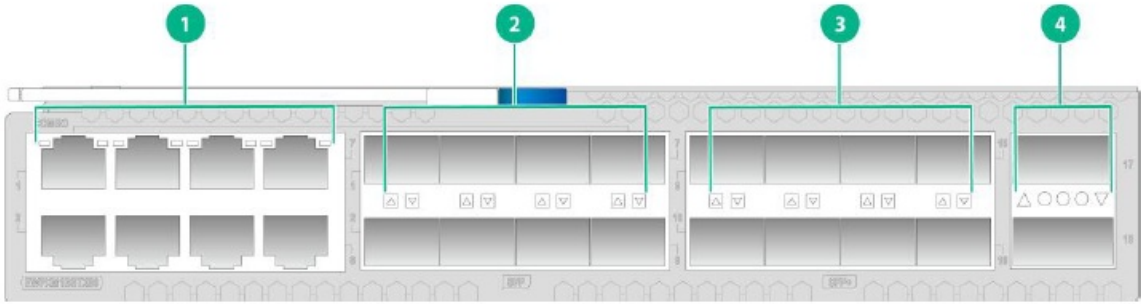

(1) 1000BASE-T Ethernet ports	(2) 1000BASE-X-SFP fiber ports
(3) 10GBASE-R-SFP+ fiber ports	(4) 40GBASE-R-QSFP+ fiber ports

Ports and LEDs

Ports

Console port

Item	Specification
Connector type	RJ-45
Compliant standard	EIA/TIA-232
Port transmission rate	9600 bps
Services	<ul style="list-style-type: none"><li>• Provides connection to an ASCII terminal</li><li>• Provides connection to the serial port of a local PC running terminal emulation program</li></ul>
Compatible models	WC 7060

USB port

Table3-2 USB port specifications

Item	Specification
Interface type	USB 2.0
Compliant standard	OHCI
Port transmission rate	Uploads and downloads data at a rate up to 480 Mbps
Functions and services	Accesses the file system on the flash of the device, for example, to upload or download application and configuration files
Compatible models	WC 7060

NOTE:

USB devices from different vendors vary in compatibilities and drivers. INTELBRAS does not guarantee correct operation of USB devices from other vendors on the device. If a USB device fails to operate on the device, replace it with one from another vendor.

## SFP port

Item	Specification
Connector type	LC
Compatible	GE SFP transceiver modules in Table3-4

Item	Specification
transceiver modules	
Compatible models	EWPM1BSTX80I

**Table3-4 GE SFP transceiver modules**

Transceiver module type	Transceiver module model	Central wave length	Receiver sensitivity	Fiber diameter	Data rate	Max transmission distance
GE multi-mode module	SFP-GE-SX-MM850-A	850 nm	-17 dBm	50 μm	1.25 Gbps	550 m (1804.46 ft)
	SFP-GE-SX-MM850-D	850 nm	-17 dBm	50 μm	1.25 Gbps	550 m (1804.46 ft)
GE single-mode module	SFP-GE-LX-SM1310-A	1310 nm	-20 dBm	9 μm	1.25 Gbps	10 km (6.21 miles)
	SFP-GE-LX-SM1310-D	1310 nm	-20 dBm	9 μm	1.25 Gbps	10 km (6.21 miles)

## NOTE:

- As a best practice, use INTELBRAS transceiver modules for the device.
- The INTELBRAS transceiver modules are subject to change over time. For the most recent list of INTELBRAS transceiver modules, contact your INTELBRAS Support or marketing staff.
- For more information about INTELBRAS transceiver modules, see INTELBRAS Transceiver Modules User Guide.

SFP+ port

Table3-5 SFP+ port specifications

Item	Specification
Connector type	LC
Compatible transceiver modules and cables	10GE SFP+ transceiver modules and cables in Table 3- 6
Compatible devices	EWPXM1BSTX80I

Table3-6 10GE SFP+ transceiver modules and cables

Transceiver module or cable type	Transceiver module or cable model	Central wavelength	Receiver sensitivity	Fiber diameter	Data rate	Max transmission distance
10GE multi-mode module	SFP-XG-SX-MM850-A	850nm	-9.9dBm	50μm	10.31Gb/s	300m
	SFP-XG-SX-MM850	850 nm	−9.9 dBm	50 μm	10.31 Gbps	300 m

Transceiver module or cable type	Transceiver module or cable model	Central wavele n gth	Receiver sen sitivity	Fiber diam eter	Data rate	Max transmi s sion dista nce
	-D					(984.25 ft)
	SFP-XG-SX-MM850 -E	850 nm	−9.9 dBm	50 μm	10.31 Gbps	300 m (984.25 ft)
10GE single-mode m odule	SFP-XG-LX-SM131 0	1310nm	-14.4dBm	9μm	10.31Gb/s	10km
	SFP-XG-LX-SM131 0 -D	1310 nm	−14.4 dBm	9 μm	10.31 Gbps	10 km (6.21 miles)
	SFP-XG-LX-SM131 0 -E	1310 nm	−14.4 dBm	9 μm	10.31 Gbps	10 km (6.21 miles)
SFP+ cable	LSWM3STK	N/A	N/A	N/A	N/A	3 m (9.84 ft)

**Figure3-1 SFP+ cable**



(1) Connector	(2) Pull latch

**NOTE:**

- As a best practice, use INTELBRAS transceiver modules and cables for the device.
- The INTELBRAS transceiver modules and cables are subject to change over time. For the most recent list of INTELBRAS transceiver modules and cables, contact your INTELBRAS Support or marketing staff.
- For more information about INTELBRAS transceiver modules and cables, see INTELBRAS Transceiver Modules User Guide.

**QSFP+ port**

**Table3-7 QSFP+ port specifications**

Item	Specification
Connector type	LC: QSFP-40G-LR4L-WDM1300, QSFP-40G-LR4-WDM1300, QSFP-40G-BIDI-SR-MM850 MPO: QSFP-40G-CSR4-MM850, QSFP-40G-SR4-MM850
Compatible transceiver modules and cables	QSFP+ transceiver modules and cables in Table 3- 8
Compatible models	EWPM1BSTX80I

**Table3-8 QSFP+ transceiver modules and cables**

**Figure3-2 QSFP+ cable**



- As a best practice, use INTELBRAS transceiver modules and cables for the device.
- The INTELBRAS transceiver modules and cables are subject to change over time. For the most recent list of INTELBRAS transceiver modules and cables, contact your INTELBRAS Support or marketing staff.
- For more information about INTELBRAS transceiver modules and cables, see INTELBRAS Transceiver Modules User Guide.

**100/1000BASE-T management Ethernet port**

**Table3-9 100/1000BASE-T management Ethernet port specifications**

Item	Specification
Connector type	RJ-45
Rate, duplex mode, and auto-MDI/MDI-X	<ul style="list-style-type: none"> <li>• 100 Mbps, half/full duplex</li> <li>• 1000 Mbps, full duplex</li> <li>• MDI/MDI-X autosensing</li> </ul>
Transmission medium	Category 5 or above twisted pair cable
Max transmission distance	100 m (328.08 ft)
Compliant standard	IEEE 802.3i, 802.3u, 802.3ab
Functions and services	Device software and Boot ROM upgrade, network management
Compatible models	WC 7060

### 1000BASE-T Ethernet port

Table3-10 1000BASE-T Ethernet port specifications

Item	Specification
Connector type	RJ-45
Auto-MDI/MDI-X	MDI/MDI-X autosensing
Max transmission distance	100 m (328.08 ft)
Transmission medium	Category 5 or above twisted pair cable
Compliant standard	IEEE 802.3ab
Compatible models	EWPXM1BSTX80I

### Combo interface

The 1000BASE-T Ethernet ports and 1000BASE-X-SFP fiber ports on the EWPXM1BSTX80I expansion module are combo interfaces. Do not use 10GBASE-R-SFP+ fiber ports and 40GBASE-R-QSFP+ fiber ports simultaneously.

### LEDs

WC 7060 device port status LEDs

### System status LED

The system status LED shows the operating status of the device. Table3-11 System status LED description

LED mark	Status	Description
SYS	Fast flashing green (4 Hz)	The system is starting up.
	Slow flashing green (0.5 Hz)	The system is operating correctly.
	Steady red	A critical alarm has been triggered, for example, power supply alarm, fan tray alarm, high temperature alarm, and software loss.
	Off	The device has not started up.

### 100/1000BASE-T management Ethernet port LED

Table3-12 100/1000BASE-T management Ethernet port LED description

LED status	Description
Steady green	The power supply is operating correctly.
Flashing green	The power supply has power input but is not installed on the device.
Steady red	The power supply is faulty or has entered protection state.
Red/green flashing alternately	The power supply has generated an alarm for power issues (such as output overcurrent, output overload, and overtemperature), but has not entered protection state.
Flashing red	The power supply does not have power input. The device is installed with two power supplies. If one has power input, but the other does not, the status LED on the power supply that does not have power input flashes red. The power supply has entered input undervoltage protection state.
Off	The power supply does not have power input.

### Status LED on a fan tray

The LSWM1BFANSCB-SNI fan tray provides a status LED to indicate its operating status.

Table3-14 Description for the status LED on a fan tray

LED status	Description
On	The fan tray is operating incorrectly.
Off	The fan tray is operating correctly.

### Port LED on an expansion module

Table3-15 Description for port LEDs on an expansion module

LED	Status	Description
1000BASE-T Ethernet port LED	Steady green	A 1000 Mbps link is present on the port.
	Flashing green	The port is receiving or sending data at 1000 Mbps.
	Off	No link is present on the port.
SFP fiber port LED	Steady green	A 1000 Mbps link is present on the port.
	Flashing green	The port is receiving or sending data at 1000 Mbps.
	Off	No link is present on the port.
10G SFP+ port LED	Steady green	A 10 Gbps link is present on the port.
	Flashing green	The port is receiving or sending data at 10 Gbps.
	Off	No link is present on the port.
40G QSFP+ port LED	Steady green	A 40 Gbps link is present on the port.
	Flashing green	The port is receiving or sending data at 40 Gbps.
	Off	No link is present on the port.

## Cooling system

To dissipate heat timely and enhance system stability, the device uses a high-performance cooling system. Consider the site ventilation design when you plan the installation site for the device.

**Table4-1 Cooling system**

Product series	Product model	Airflow direction
WC 7060 series	WC 7060	The device uses a front-rear air aisle. It can provide airflow from the port side to the power supply side by using fan trays. See Figure4-1.

**Figure4-1 Airflow from the port side to the power supply side through the device chassis**



## Documents / Resources



<div>INTELBRAS WC 7060 Series Access Controllers Hardware Information and Specifications</div> <div>INTELBRAS</div>	<div><a href="#">INTELBRAS WC 7060 Series Access Controllers</a> [pdf] Owner's Manual</div> <div>WC 7060, WC 7060 Series Access Controllers, WC 7060 Series, Access Controllers, Controller S</div>
---	---

References

- [User Manual](#)

Manuals+. [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.