



KOLINK Observatory Z RGB Super MIDI Tower Case User Manual

[Home](#) » [KOLINK](#) » KOLINK Observatory Z RGB Super MIDI Tower Case User Manual

Contents [[hide](#)]








- [1 KOLINK Observatory Z RGB Super MIDI Tower Case](#)
- [2 ACCESSORY PACK CONTENTS](#)
- [3 POWER SUPPLY INSTALLATION](#)
- [4 3.5" HDD INSTALLATION](#)
- [5 I/O PANEL INSTALLATION](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)



KOLINK Observatory Z RGB Super MIDI Tower Case




ACCESSORY PACK CONTENTS

x33  Motherboard/SSD Screws	x4  Motherboard Stand-off	x5  PSU Screw	x8  3.5" Drive Screw
x8  Cable Tie	x3  Thumb Screw	x1  Add-on Card Screw	


PANEL REMOVAL

- Left Panel – Unscrew the two thumbscrews and slide the glass panel backwards.
- Right Panel – Unscrew the two thumbscrews and slide off.
- Front Panel – Find the bottom cut out, stabilise the chassis with one hand, and pull from the cutout with a little force until the clips release.

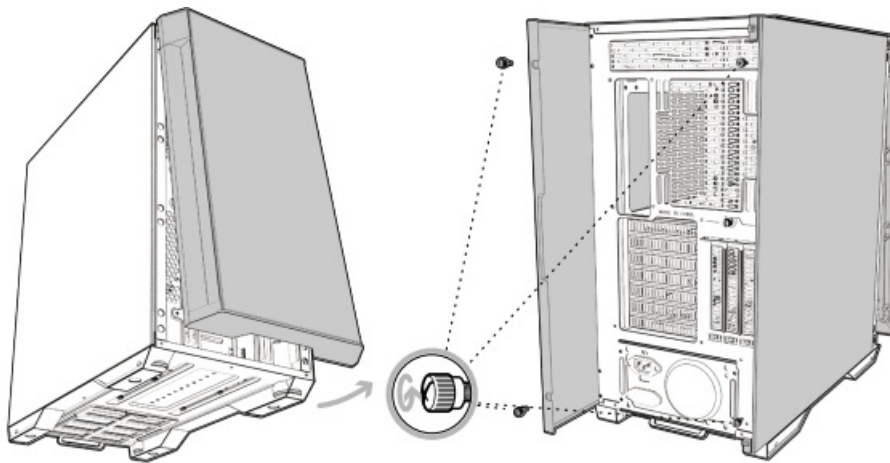


MOTHERBOARD INSTALLATION

- Align your motherboard with the chassis to locate where the stand-offs should be installed.
- Once done, remove the motherboard and fasten stand-offs accordingly.
- Insert your motherboard I/O plate into the cutout at the rear of the case.
- Place your motherboard into the chassis, making sure the rear ports fit into the I/O plate.
- Use the provided motherboard screws to attach your motherboard to the chassis.

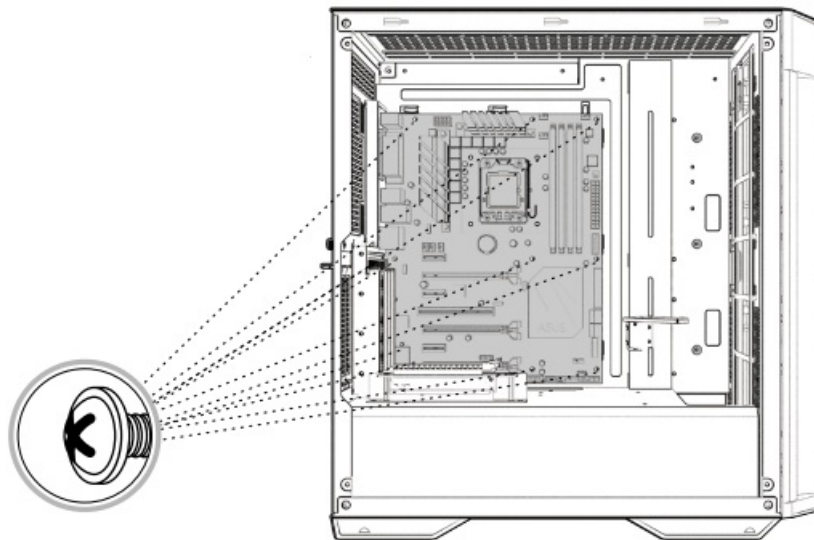


POWER SUPPLY INSTALLATION

- Remove the PSU bracket by unscrewing the four thumbscrews at the back.
- Install the PSU to the bracket using the supplied screws and slide back into the chassis.
- Secure the PSU bracket using the thumbscrews previously removed.

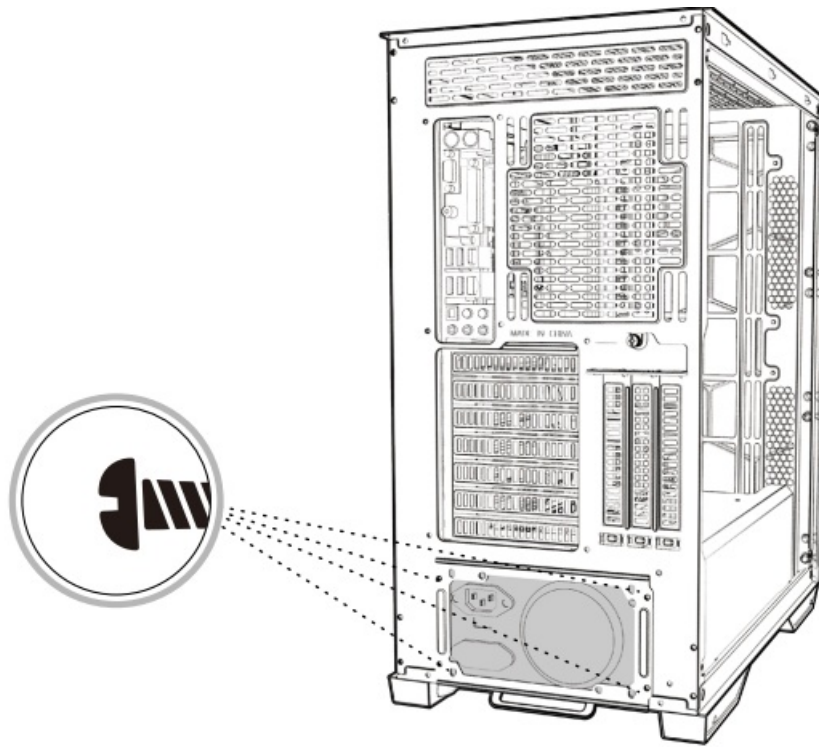


GRAPHICS CARD/PCI-E CARD INSTALLATION

- Remove the rear PCI-E slot covers as necessary (depending on the slot size of your card)
- Carefully position and slide your PCI-E card into place, then secure with the add-on card screws supplied.
- If mounting vertically, attach the provided vertical GPU bracket to the PSU shroud, secure your Kolink PCI-E riser cable to it (sold separately) and attach the cable to the motherboard. Remove the rear PCI-E slot covers as necessary, then carefully position your PCI-E card, slot into the PCI-E riser mount and secure with the add-on screws supplied.

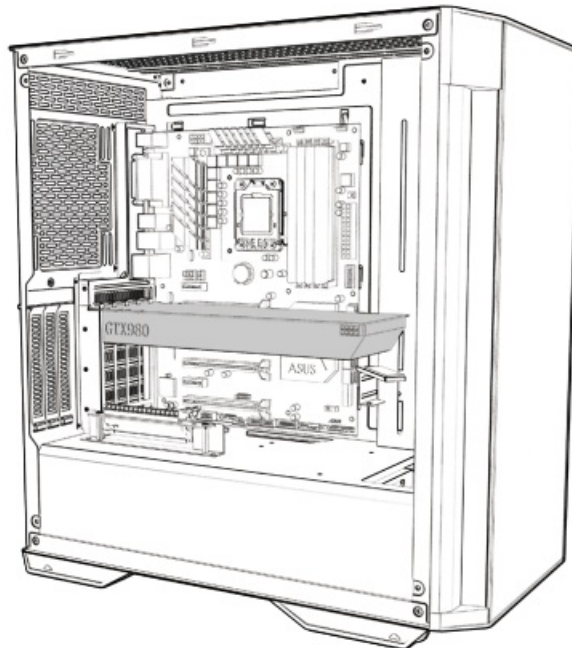


2.5" SDD INSTALLATION (R)

Remove the bracket from the rear of the motherboard plate, attach your 2.5" drive and then screw back into place.

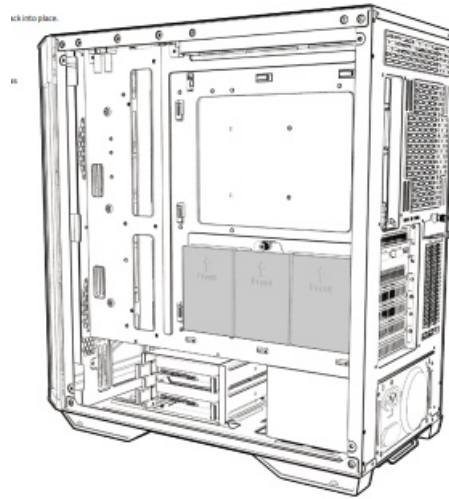


2.5" SDD INSTALLATION

Place the 2.5" HDD/SSD into/on top of the HDD bracket and screw in if required.

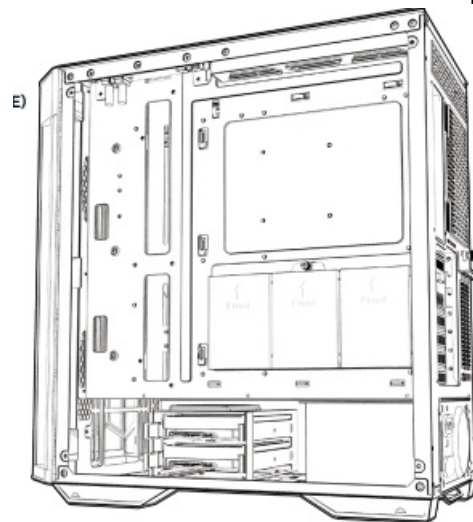


3.5" HDD INSTALLATION

Place the 3.5" HDD into/on top of the HDD bracket and screw in if required

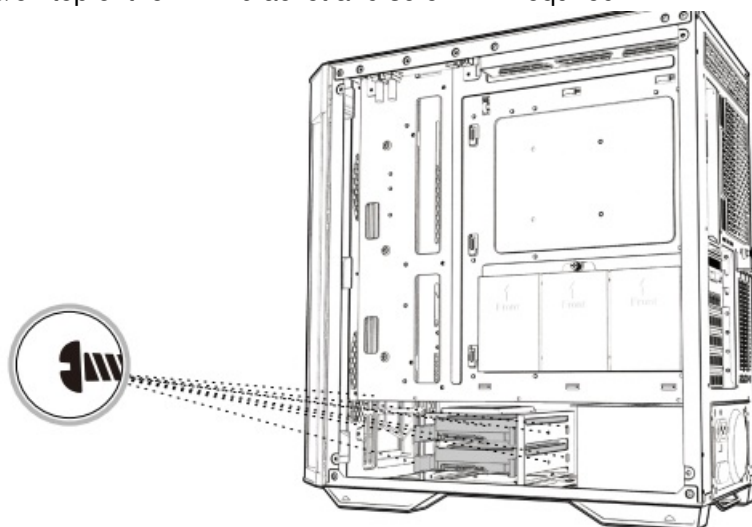

TOP FAN INSTALLATION


- Remove the dust filter from the top of the case.
- Align your fan(s) to the screw holes on the top of the chassis and secure with screws.

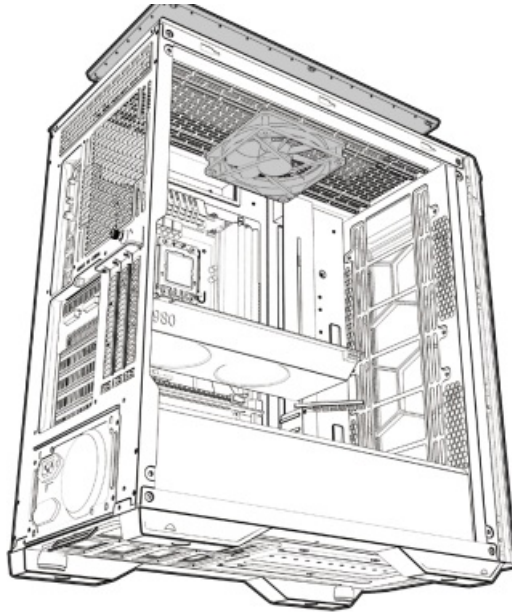

- Replace your dust filter once secured.

FRONT/REAR FAN INSTALLATION

Align your fan to the screw holes on the chassis and secure with screws.

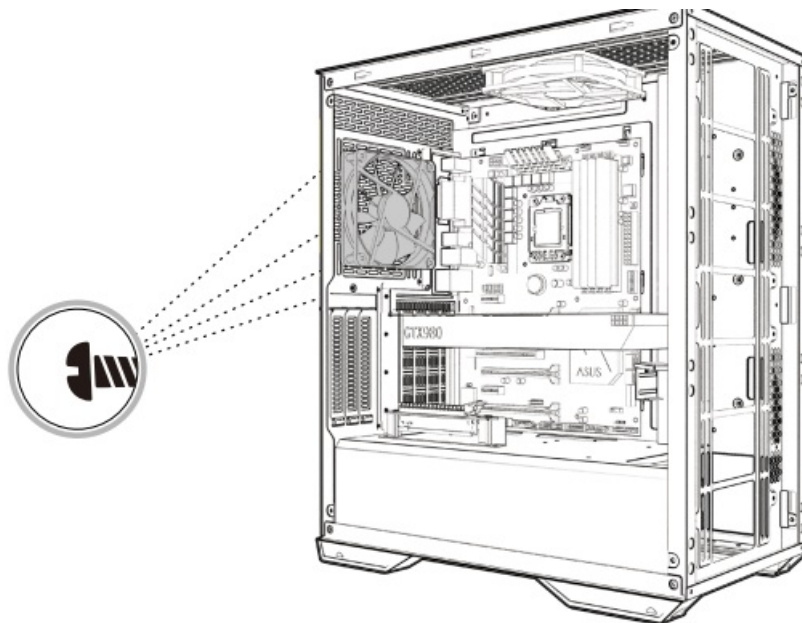

WATERCOOLING RADIATOR INSTALLATION

Secure the fans to the radiator, then fasten the radiator inside the chassis by securing with screws from the outside

I/O PANEL INSTALLATION

- Carefully check the labeling of each connector from the I/O panel to identify their function.
- Cross-reference with the motherboard manual to locate where each wire should be installed, then secure one at a time. Please ensure they are installed in the correct polarity to avoid non-function or damage

	<p>KOLINK Observatory Z RGB Super MIDI Tower Case [pdf] User Manual Observatory Z, RGB Super MIDI Tower Case, Observatory Z RGB Super MIDI Tower Case</p>
---	---