

devolo MAGIC

Manual
devolo Magic 2 WiFi next



devolo Magic 2 WiFi next

A solid blue horizontal bar at the bottom of the slide.

© 2021 devolo AG Aachen (Germany)

The reproduction and distribution of the documentation and software supplied with this product and the use of its contents is subject to written authorization from devolo. We reserve the right to make any alterations that arise as the result of technical development.

Trademarks

Android™ is a registered trademark of Open Handset Alliance.

Linux® is a registered trademark of Linus Torvalds.

Ubuntu® is a registered trademark of Canonical Ltd.

Mac® and Mac OS X® are registered trademarks of Apple Computer, Inc.

iPhone®, iPad® and iPod® are registered trademarks of Apple Computer, Inc.

Windows® and Microsoft® are registered trademarks of Microsoft, Corp.

Wi-Fi®, Wi-Fi Protected Access™, WPA™, WPA2™ and Wi-Fi Protected Setup™ are registered trademarks of the Wi-Fi Alliance®.

devolo and the devolo logo are registered trademarks of devolo AG.

The firmware package from devolo contains files which are covered by different licenses, in particular under devolo proprietary license and under open source license (GNU General Public License, GNU Lesser General Public License or FreeBSD License). The source code which is available for Open Source distribution can be requested in writing from gpl@devolo.de.

All other names mentioned may be trademarks or registered trademarks of their respective owners. Subject to change without notice. No liability for technical errors or omissions.

This product has been manufactured and is sold under a licence granted to devolo AG by Vectis One Ltd for patents concerning Wi-Fi-technology and owned by Wi-Fi One, LLC ("Licence"). The Licence is limited exclusively to finished electronics for end-use and does not extend rights to any third party device or process used or sold in combination with this product.

devolo AG

Charlottenburger Allee 67

52068 Aachen

Germany

www.devolo.global

Version 1.0_3/21

Contents

1	Preface	7
1.1	About this manual	7
1.2	Intended use	8
1.3	CE Conformity	9
1.4	Safety notes	10
1.5	devolo on the Internet	11
2	Introduction	12
2.1	devolo Magic	12
2.2	Introduction to the devolo magic adapter	13
2.3	Pairing – Establishing a PLC connection	14
2.3.1	Reading the PLC indicator light	17
2.3.2	Wi-Fi button	20
2.3.3	Reading the Wi-Fi indicator light	21
2.3.4	Reset button	23
2.3.5	Network jacks	23
2.3.6	Wi-Fi antennas	23
2.3.7	Integrated electrical socket	23
3	Initial use	24
3.1	Package contents	24
3.2	System requirements	24
3.3	Connecting the devolo Magic 2 WiFi next	25
3.3.1	Starter Kit – Automatic set-up for a new devolo Magic PLC network	25
3.3.2	Addition – Expanding an existing PLC network by adding another devolo Magic 2 WiFi next	26
3.3.3	Changing the network password	26
3.3.4	Establish a Wi-Fi connection with the devolo Magic 2 WiFi next	26
3.4	Installation of devolo software	27
3.5	Removing the devolo Magic adapter from a PLC network	28

4	Network configuration	29
4.1	Calling up the built-in web interface	29
4.2	General information about the menu	29
4.3	Overview	32
4.3.1	System	32
4.3.2	Wi-Fi	32
4.3.3	Powerline	32
4.3.4	LAN	33
4.4	Wi-Fi	33
4.4.1	Status	34
4.4.2	Wi-Fi networks	34
4.4.3	Guest network	36
4.4.4	Mesh	37
4.4.5	Schedule control	39
4.4.6	Parental control	40
4.4.7	Wi-Fi Protected Setup (WPS)	41
4.4.8	Neighbour networks	42
4.5	Powerline	43
4.6	LAN	45
4.6.1	Status	45
4.6.2	IPv4/IPv6 configuration	46
4.7	System	46
4.7.1	Status	46
4.7.2	Management	47
4.7.3	Configuration	48
4.7.4	Firmware	49
4.7.5	Config Sync	50

5	Appendix	51
5.1	Technical specifications	51
5.2	Bandwidth optimization	51
5.3	Frequency range and transmitting power	52
5.4	Channels and carrier frequencies	54
5.5	Disposal of old devices	55
5.6	Warranty conditions	56

1 Preface

Welcome to the fantastic world of devolo Magic!

In no time at all, devolo Magic transforms your house into a multimedia home that is ready for the future today. devolo Magic gives you noticeably higher speeds, more stability and greater range, providing the perfect Internet experience as a result!

1.1 About this manual

Carefully read all instructions before setting up the device and store the manual and/or installation guide for later reference.

After a brief introduction to „devolo Magic“ and to the devolo Magic 2 WiFi next in **Chapter 2**, **Chapter 3** tells you how to successfully start using the adapter in your network. **Chapter 4** describes in detail the setting options of the built-in devolo Magic configuration interface.

Tips for bandwidth optimisation, information about environmental compatibility of the device, as well as our warranty terms, can be found in **Chapter 5** at the end of the manual.

Description of the icons

This section contains a brief description of the icons used in this manual and/or on the rating plate, the device connector, as well as the icons used on the package:

Icon	Description
	Very important safety symbol that warns you of hazardous electrical voltage which if not avoided can result in serious injury or death.
	Very important safety symbol that warns you of a potentially dangerous situation which if not avoided can result in serious injury or death.
	An important safety symbol that warns you of a potentially burn hazard which if not avoided can result in minor injuries or damage to property.
	An important safety symbol that warns you of a potentially dangerous situation involving a tripping hazard which can result in injuries.

Icon	Description
	An important note that should be observed which can potentially lead to material damages.
	The device may only be used indoors in dry conditions.
	The device is a Class I product. All electrically conductive (made of metal) housing parts where a voltage can be applied during operation or maintenance in the event of an error must be continuously connected to the earth wire.
	The manufacturer/distributing company uses the CE marking to declare that the product meets all applicable European regulations and has been subjected to the prescribed conformity assessment procedures.

Icon	Description
	It is used to prevent the occurrence of waste electrical and electronic equipment and to reduce this type of waste through reuse, recycling and other forms of utilisation. The European Community WEEE Directive establishes minimum standards for handling waste electrical and electronic equipment in the EU.
	Additional information, background material and configuration tips for your device.
	Indicates a completed course of action

1.2 Intended use

Use devolo devices, devolo software and the provided accessories as described to prevent damage and injury.

Products

devolo devices are communication devices designed for indoors.* Depending on the product, they

are equipped with a **PLC** - (**P**ower**L**ine **C**ommunication) and/or a Wi-Fi module and/or a broadband module. The devices communicate with each other by means of, depending on the product, PLC, data and telephone line (e.g. coaxial or twisted pair) and/or Wi-Fi.

devolo devices do not replace the existing router. They enable transmission of the existing Internet/data signal over the in-house wiring and via Wi-Fi and integrate Internet-compatible terminal devices into the home network.

Under no circumstances may devolo devices be used outdoors, because large temperature fluctuations and moisture can damage both the device and the power line*. devolo devices may not be installed at a height above **two metres** unless an additional fastening mechanism is available. The products are intended for operation in the EU, Switzerland and Norway.

* This does not include devolo outdoor devices, which are suitable for outdoor applications based on their IP classification.

Software

devolo devices can be used only with the free, downloadable programs approved and available on devolo AG's website (www.devolo.global) and in app stores (iOS and Google Play). Any modifica-

tions to the product-specific firmware or software could damage the products and, in the worst-case scenario, render them unusable, negatively affect conformity and cause the warranty claims to become void.

Always use the most up-to-date software version to make sure you have the latest security functions and device updates. The installed devolo software notifies you automatically if a new software version is available.

Accessories

Use only the provided accessories.

1.3 CE Conformity

CE This product complies with the technical requirements of the directives **2014/53/EU**, **2011/65/EC** and **2009/125/EC**.

This product is designed for use in the EU, Switzerland and Norway.

A printout of the simplified CE declaration of this product is separately included and can also be found under

www.devolo.global/support/ce.

1.4 Safety notes

It is essential to have read and understood all safety and operating instructions before the devolo device is used for the first time; keep them safe for future reference.



DANGER! Electrical shock caused by electricity

Do **not** reach into the electrical socket.

Do **not** open the device.

Do **not** insert any objects into the electrical socket or into the ventilation openings



DANGER! Electric shock caused by electricity

Device must be plugged into a power socket with a connected earth wire

devolo devices may be operated only on a **mains power supply** as described on the **rating plate**.



CAUTION! Tripping hazard

Lay the network cable in a barrier-free manner;

ensure that the electrical socket and the connected network devices are easily accessible

To disconnect devolo devices from the mains supply, unplug the device from the electrical socket.



CAUTION! Damage to the device caused by ambient conditions

Only use device indoors in dry conditions



CAUTION! Heat development during operation

Certain housing components can become very hot in certain situations. Attach device so that it is touch-proof, observing optimal positioning

devolo devices should only be installed at locations that guarantee adequate ventilation. Slots and openings on the housing are used for ventilation:

- Do **not** cover devolo devices during operation.
- Do **not** place **any objects on** devolo devices.
- Do **not** insert **any objects into** the **openings** of devolo devices.
- devolo devices must **not** be placed directly **next to** a naked **flame** (such as fire or candles).
- devolo devices must **not be exposed to direct heat radiation** (e.g. radiator, direct sunlight).

Users do **not** need to carry out any **maintenance** on devolo devices. In the event of damage, disconnect the devolo device from the mains supply by pulling it or its plug out of the electrical socket. Then contact qualified specialist personnel (after-

sales service) exclusively. **Damage** is deemed to have occurred, for example,

- if a button is damaged.
- if the power plug is damaged.
- if the devolo device has been showered with liquid (such as rain or other water).
- if the devolo device is inoperable.
- if the housing of the devolo device is damaged.



CAUTION! Damage to housing from cleaning agents containing solvents

Clean only electroless and with dry cloth



Do not plug devolo devices directly into each other. Devices that are plugged into each other can experience a decrease in transmission rate.

If you have any further ideas or suggestions related to our products, please don't hesitate to contact us at support@devolo.com!

1.5 devolo on the Internet

For detailed information on our products, visit www.devolo.global.

There you will find product descriptions and documentation, and also updates of devolo software and your device's firmware.

2 Introduction

2.1 devolo Magic

Home is where devolo Magic is – in no time at all, devolo Magic transforms your house or flat into a multimedia home of the future with noticeably higher speed, more stability and greater range, providing the perfect Internet experience as a result!

Be inspired by products that are astonishingly easy to install, with impressive, innovative technology and unbeatable performance.

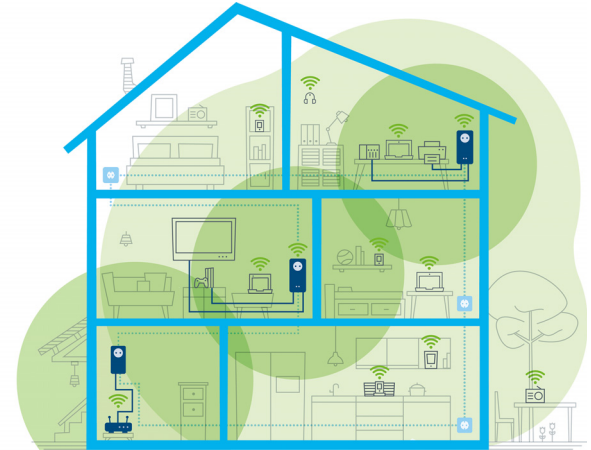


Fig. 1 devolo Magic throughout the home

Be ready for the technology of the future today

devolo Magic embodies the new generation of the tried-and-tested Powerline technology (PLC) based on the cutting-edge G.hn architecture. G.hn was developed by the International Telecommunication Union (ITU) with ongoing development provided primarily by the HomeGrid Forum industry association. devolo Magic products are certified according to HomeGrid standards and are compatible with other HomeGrid-certified products.

Like the HomePlug AV technology used in established devolo dLAN devices, devolo Magic uses the household mains supply for data transmission and secures ideal performance and stability in locations where network cables are not viable or desired and/or the Wi-Fi frequently falls short due to ceilings and walls.



To set up a devolo Magic network, you need at least two devolo Magic devices. For technical reasons, devices from the devolo Magic series are not compatible with dLAN devices.

2.2 Introduction to the devolo magic adapter

Unpack– plug in – get started and be prepared for the new generation of the tried-and-tested Powerline technology and innovative mesh Wi-Fi with swiftness and stability:

Powerline

- At speeds up to **2400 Mbps**
- Over distances **up to 500 metres**
- **Security** – with **128-bit AES** Powerline encryption

Mesh Wi-Fi

- At speeds up to **1200 Mbps**
- Four antennas cover the 2.4 and 5 GHz Wi-Fi frequencies at the same time and use the full extent of the entire 5 GHz frequency band (**Dynamic Frequency Selection, DFS**).
- **Multi-user MIMO technology** – The devolo Magic 2 WiFi next supplies your smartphone, tablet and other devices with data streams simultaneously – at the speed you require and at an efficient transfer rate.
- **Air-time fairness** – Quicker Wi-Fi devices take priority in the network.
- **Band steering** – Use of the optimum frequency band (2.4 and 5 GHz frequency band)
- **Roaming** – Quickly and seamlessly connect to the strongest Wi-Fi access point
- **Security** – with **WPA2/WPA3 for wireless ac** ("IEEE 802.11a/b/g/n/ac" Wi-Fi high-speed standards)
- **Convenient additional functions** such as parental controls, guest Wi-Fi, time control and Config Sync are integrated in the devolo Magic 2 WiFi.

- **Efficiency** – The integrated PowerSave mode reduces energy consumption automatically **at low data traffic**.
- The **2 gigabit network connectors** on the devolo Magic 2 WiFi next let you connect stationary network devices—such as a game console, TV or media receiver—to your Internet access point over the Powerline network (e.g. Internet router).
- Its **integrated electrical socket** can be used like a normal wall socket to supply power to an additional network device or a power strip.

The devolo Magic 2 WiFi next features

- An integrated electrical socket,
- A PLC button with LED status display,
- A Wi-Fi button with LED status display,
- Four internal Wi-Fi antennas,
- Two gigabit network connectors
- A reset button (next to the network connectors).



*The LED status displays can be disabled. You can find more information about this in Chapter 4 **Network configuration** or in the product manual for the devolo Cockpit software available online at www.devolo.global/devolo-cockpit.*



Fig. 3 Network connections

2.3 Pairing – Establishing a PLC connection

devolo Magic adapters that are in the factory default condition, i.e. have been recently purchased or successfully reset (see Chapter **3.5 Removing the devolo Magic adapter from a PLC network**), automatically start to attempt to pair (establish a PLC connection) with another devolo Magic adapter when reconnected to the mains supply.

Starting up a new devolo Magic PLC network

After plugging the devolo Magic adapters into available power sockets, a new devolo Magic network is established automatically within 3 minutes.

Expanding an existing devolo Magic PLC network by adding another devolo Magic adapter

In order to use a new devolo Magic 2 WiFi in your devolo Magic- network, first you have to connect it to your existing devolo Magic adapters devices as a network. This is accomplished by using a shared PLC password, which can be assigned in various ways:

- Using **devolo Cockpit** or the **devolo Home Network App** (see Chapter 3.4 **Installation of devolo software**)
- Using the **web interface** (see Chapter 4.5 **Powerline**)
- Using the **PLC button** as described below.

- ❶ To do so, plug the new devolo Magic adapter into an available power socket and, for approximately 1 second, press the PLC button on a devolo Magic adapter in your existing devolo Magic network.
- ❷ The new devolo Magic adapter pairs automatically so no button needs to be pressed. The LED of this adapter now also flashes white.



After a short time, the flashing LED becomes a steady white light. The devolo Magic adapter has been successfully integrated into your existing devolo Magic network.



For each pairing operation, only one additional devolo Magic adapter can be added at a time.

*You can find detailed information about installing devolo Magic adapters in Chapter 3.3 **Connecting the devolo Magic 2 WiFi next.***

2.3.1 Reading the PLC indicator light

The integrated PLC indicator light (**LED**) shows the status for the devolo Magic 2 WiFi by illuminating and/or flashing:

	LED	Flashing behaviour	Meaning	LED status display (web interface*)
1	Red LED	Lights up for up to 2 sec.	Start-up process	Cannot be disabled
2	Red LED	Flashes at intervals of 0.5 sec. (on/off)	Status 1: The reset of the devolo Magic adapter was successful. The PLC/reset button has been pressed and held for 10 seconds. Status 2: The devolo Magic adapter (once again) has the factory default settings. Since the last reset, no pairing with another devolo Magic adapter has taken place. Connect the adapter with another devolo Magic adapter to create a full-fledged devolo Magic network as described in Chapter 2.3 Pairing – Establishing a PLC connection.	Cannot be disabled

	LED	Flashing behaviour	Meaning	LED status display (web interface*)
3	Red LED	Lights up steady	Status 1: The other network nodes are in standby mode and cannot currently be accessed over the mains supply. The PLC LEDs of the other devolo Magic adapters flash white only for a short time. Status 2: The connection to the other network nodes has been interrupted. There may be electromagnetic or radio frequency interference on the power line. In this case, put the devolo Magic adapters closer to each other or try to shut off the source of interference.	Can be disabled
4	Red and white LED	Flashes at intervals of 0.1 sec. red/2 sec. white	Data transmission rate not in optimum range **	Can be disabled

	LED	Flashing behaviour	Meaning	LED status display (web interface*)
5	White LED	Status 1: Flashes at intervals of 0.5 sec. (on/off) Status 2: Flashes at intervals of 1 sec. (on/off)	Status 1: This devolo Magic adapter is in pairing mode and the system is searching for new devolo Magic adapters. Status 2: Someone has triggered the "Identify device" function on the web interface or in the devolo Home Network App. This function identifies the devolo Magic adapter being sought.	Cannot be disabled
6	White LED	Lights up steady	The devolo Magic connection does not have any issues and the devolo Magic adapter is ready to operate.	Can be disabled
7	White LED	Flashes at intervals of 0.1 sec. on / 5 sec. off	The devolo Magic adapter is in standby mode.***	Can be disabled
8	Red and white LED	Flashes at intervals of 0.5 sec. red / 0.5 sec. white	The devolo Magic adapter is carrying out a firmware update.	Cannot be disabled

* Information about the web interface can be found in Chapter 4 **Network configuration**.

** Information on improving the transmission rate can be found in Chapter 5.2 **Bandwidth optimization**.

***A devolo Magic adapter switches to standby mode after approximately 10 minutes if no active network device (e.g. computer) is connected to the network interface and the Wi-Fi is switched off. In this mode, the devolo Magic adapter cannot be accessed over the electrical wiring. As soon as the network device (e.g. computer) connected to the network interface is switched on again, your devolo Magic adapter can also be accessed over the electrical wiring again.



*Check whether the adapter is connected to the mains supply correctly and whether the pairing operation has been carried out successfully. For more information about this, refer to 3.3 **Connecting the devolo Magic 2 WiFi next**.*

2.3.2 Wi-Fi button



This button controls the following functions:

Wi-Fi on/off

In the **factory default settings**, the **Wi-Fi** setting is already **enabled** and the Wi-Fi encryption is set to **WPA2**. The default WiFi key for the initial installation of the devolo Magic 2 WiFi next is the device's WiFi key. You will find the unique key on the label on the back of the housing.

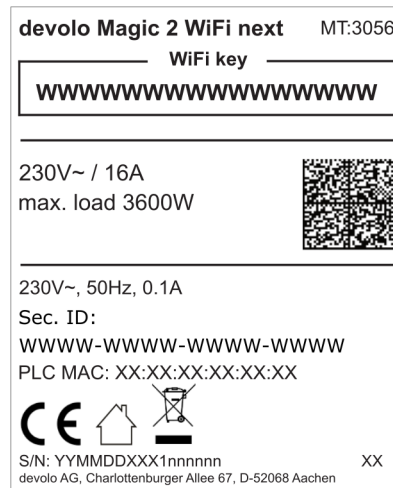


Fig. 4: country-specific type plate



Before the networking procedure, write down the Wi-Fi key of the devolo Magic 2 WiFi. You can find the device's unique key on the label on the rear side of the housing.

In order to connect the devolo Magic 2 WiFi with your laptop, tablet or smartphone later via Wi-Fi, enter the noted Wi-Fi key as the network security key.

- In order to **switch Wi-Fi off**, press and hold the Wi-Fi button **longer than 3 seconds**.
- In order to **switch Wi-Fi back on**, briefly tap the Wi-Fi button.

Connecting Wi-Fi devices via WPS

- If the device is still on **factory defaults**, tap the **Wi-Fi button** in order to activate **WPS**.
- If the **Wi-Fi** connection was **switched off** and **you would like to activate WPS**, press the **Wi-**

Fi button twice; once to switch Wi-Fi on, and again to activate WPS.

- If the **Wi-Fi** connection is **switched on** and **you want to copy** these settings to another devolo Magic adapter, continue reading with the Chapter **4.7.5 Config Sync**.



WPS is one of the encryption standards developed by the Wi-Fi Alliance. The objective of WPS is to make it easier to add devices to an existing network. For more detailed information, refer to Chapter **4.4.7 Wi-Fi Protected Setup (WPS)**.

2.3.3 Reading the Wi-Fi indicator light

The integrated Wi-Fi indicator light (**LED**) shows the status of the devolo Magic 2 WiFi by illuminating and/or flashing

	Wi-Fi-LED	Flashing behavior	Meaning	LED status display (web interface*)
1	White LED	Flashes at intervals of 0,1 sec. on / 5 sec. off	The devolo Magic adapter is in WPS mode to integrate Wi-Fi-enabled devices via WPS.	Cannot be disabled

	Wi-Fi-LED	Flashing behavior	Meaning	LED status display (web interface*)
2	White LED	Lights up steady	Wi-Fi is switched on and active.	Can be disabled
3	White LED	Off	Status 1: The Wi-Fi LED is switched off and the devolo magic adapter is still ready for use. Status 2: The Wi-Fi function ist disabled.	Can be disabled

* Information about the web interface can be found in Chapter **4 Network configuration**.

2.3.4 Reset button

The **reset** button (next to the network jacks) has two different functions:

Restart

The device restarts if you press the Reset button for less than 10 seconds.

Factory default settings

- 1 To remove a devolo Magic adapter from your devolo Magic network and successfully restore its entire configuration to the factory defaults, press and hold the reset button longer than 10 seconds.

Keep in mind that all settings that have already been made will be lost!

- 2 Wait until the LED flashes white and then disconnect the devolo Magic adapter from the mains supply.



The devolo Magic adapter has been successfully removed from your existing devolo Magic network.

2.3.5 Network jacks

You can use the network jacks on the devolo Magic adapter to connect it to stationary devices such as computers, game consoles, etc. using a standard network cable.

2.3.6 Wi-Fi antennas

The internal Wi-Fi antennas are for connecting to other network devices wirelessly.

2.3.7 Integrated electrical socket

Always use the integrated electrical socket on the devolo Magic adapter when connecting other consumers to the mains supply. In particular, electronic devices with mains adapter can negatively affect PLC performance.

The integrated mains filter in the devolo Magic adapter filters any such external interference and reduces any impairment of PLC performance.

3 Initial use

This chapter tells you everything you need to know to set up and use your devolo Magic 2 WiFi next . We describe how to connect the device and briefly describe the devolo software that comes with it. For more information, please visit our website www.devolo.global.

3.1 Package contents

Please ensure that the delivery is complete before beginning with the installation of your devolo Magic 2 WiFi next :

- **Single Kit:**

- 1 devolo Magic 2 WiFi next
- Hard copy of installation guide
- Printed security flyer
- Simplified CE declaration

or

- **Starter Kit:**

- 1 devolo Magic 2 WiFi next
- 1 devolo Magic 2 LAN ¹⁻¹
- 1 network cable
- Hard copy of installation guide

- Printed security flyer
- Simplified CE declaration

or

- **Multiroom Kit:**

- 2 devolo Magic 2 WiFi next
- 1 devolo Magic 2 LAN ¹⁻¹
- 1 network cable
- Hard copy of installation guide
- Printed security flyer
- Simplified CE declaration

devolo AG reserves the right to change the package contents without prior notice.

3.2 System requirements

- **Operating systems supported by devolo Cockpit:**

- from Windows 7 (32-bit/64-bit),
- from Ubuntu 13.10 (32-bit/64-bit),
- from Mac (OS X 10.9)

- **Gigabit network connection**

- **Network connection**



Please note that your computer or other device must have a network card or network adapter with a network interface.

To set up a devolo network, you need at least two devolo adapters.

3.3 Connecting the devolo Magic 2 WiFi next



CAUTION! Damage to the device caused by ambient conditions
Only use device indoors in dry conditions

In the following sections we describe how to connect the devolo Magic 2 WiFi next and integrate it into a network. We clarify the exact procedures based on potential network scenarios.

For the permitted voltage range for operating the device and the power consumption, refer to the type plate on the rear of the device. For additional technical information on our products, refer to the product area at www.devolo.com.

3.3.1 Starter Kit – Automatic set-up for a new devolo Magic PLC network

- 1 Connect one devolo Magic 2 LAN ¹⁻¹ to your Internet access device's network connection (e.g. your Internet router).



CAUTION! Tripping hazard

Lay the network cable in a barrier-free manner and ensure that the electrical socket and the connected network devices are easily accessible

- 2 Plug both devolo Magic adapters into available power sockets within 3 minutes. As soon as the LEDs on both adapters flash white at regular intervals of 0.5 sec., they are ready to operate and automatically start the process of establishing an encrypted connection to each other (see Chapter **2.3.1 Reading the PLC indicator light**).



If the LEDs on both devolo Magic adapters light up in white, then your devolo Magic network has been set up according to your individual specifications and is protected from unauthorised access.

3.3.2 Addition – Expanding an existing PLC network by adding another devolo Magic 2 WiFi next

Before you can use the devolo Magic 2 WiFi next in your devolo Magic network, first you have to connect it to your existing devolo Magic adapters as a network. This is accomplished by using a shared password.

- 1 Plug the devolo Magic 2 WiFi next into an available power socket. As soon as the LED flashes white at regular intervals of 0.5 seconds, the adapter is ready to operate but not yet integrated into a devolo Magic network (see Chapter 2.3.1 Reading the PLC indicator light).

- 2 Within 3 minutes, press the PLC button on a devolo Magic adapter in your existing devolo Magic network for approximately 1 sec.

 *The new devolo Magic adapter pairs automatically so no button needs to be pressed. The LED of this adapter now also flashes white.*

 If the LEDs light up white on both devolo Magic adapters, the new adapter has been successfully integrated into your existing devolo Magic network.



For each pairing operation, only one additional adapter can be added at a time.

3.3.3 Changing the network password

A network password can also be changed in the following ways:

- Using the **web interface** of the devolo Magic adapter (see Chapter 4.5 Powerline)

or

- Using **devolo Cockpit** or the **devolo Home Network App**. For more information, refer to the chapter. 3.4 Installation of devolo software

3.3.4 Establish a Wi-Fi connection with the devolo Magic 2 WiFi next

Establish the Wi-Fi connection with your laptop, tablet or smartphone by entering the previously noted WiFi key as the network security key.

Integrate the Wi-Fi adapter into an existing Wi-Fi network

To ensure that the devolo Magic 2 WiFi next has the same Wi-Fi configuration as your Wi-Fi router, you can apply the Wi-Fi access data at the touch of a button using the **WiFi Clone** function. This can be enabled in different ways:

Activating WiFi Clone:

- Activating WiFi Clone by pressing a button: Briefly press the **PLC button** on your devolo Magic WiFi adapter. After the button is pressed, the LED flashes white. Press the WPS button on your router within **2 minutes**. Please consult your router's instruction for use to find out how long to press the button for.

or

- Activating WiFi Clone from the web interface. More information about this function can be found in Chapter **WiFi Clone**.

3.4 Installation of devolo software

Installing devolo Cockpit software

devolo Cockpit finds all accessible devolo Magic adapters in your devolo Magic network, displays information about these devices and encrypts your devolo Magic network individually. You can use the software to navigate to the integrated web interface.

Operating systems supported by devolo Cockpit (Version 5.0 or later):

- from Windows 7 (32-bit/64-bit) or later,
- from Ubuntu 13.10 (32-bit/64-bit),
- from Mac (OS X 10.9)



You can find the product manual, software and additional information on devolo Cockpit online at www.devolo.global/devolo-cockpit.

Downloading the devolo Home Network App

The devolo Home Network App is devolo's **free app** also for checking and configuring WiFi, PLC and LAN connections for the devolo Magic adapter (using a smartphone or tablet). The smartphone or tablet connects to the devolo Magic adapter at home over Wi-Fi.

- 1 Download the devolo Home Network App to your smartphone or tablet computer from the corresponding store.
- 2 The devolo Home Network App is placed in your smartphone's or tablet's app list as usual. Tapping on the devolo Home Network App icon brings you to the start menu.



You can find more information about the devolo Home Network App online at www.devolo.global/home-network-app.

3.5 Removing the devolo Magic adapter from a PLC network

To remove a devolo Magic adapter from your network and successfully restore its entire configuration to the factory default settings, press the reset button longer than 10 seconds. Wait until the LED flashes white and then disconnect the adapter from the mains supply.

Keep in mind that all settings that have already been made will be lost!

To integrate the mains supply into another network, proceed as described in Chapter **3.3.2 Addition – Expanding an existing PLC network by adding another devolo Magic 2 WiFi next.**

4 Network configuration

The devolo Magic 2 WiFi next has a built-in web interface that can be called up using a standard web browser. All settings for operating the device can be modified here.

4.1 Calling up the built-in web interface

You can access the built-in online web interface for the devolo Magic 2 WiFi next in different ways:

- Using the **devolo Home Network App** on your smartphone or tablet, you can access the device's web interface by tapping on the corresponding adapter symbol for the devolo Magic 2 WiFi next.

or

- Using the **Cockpit software**, you can get to the device's web interface by clicking on the corresponding tab for the devolo Magic 2 WiFi next. Then the program determines the current IP address and starts the configuration in the web browser.



*By default, the web interface will open directly. However, if an access password has been set via the option **System → Management**, you have to enter that password first. Read more about this under **4.7 System**.*

You can find more information on devolo Home Network App and Cockpit software in Chapter 3.4 Installation of devolo software.


4.2 General information about the menu

All menu functions are described in the corresponding interface as well as in the associated chapter in the manual. The sequence of the description in the manual follows the structure of the menu. The figures for the device interface serve as examples.

Logging in

The web interface is not password protected. Assigning a login password is mandatory when logging in for the first time to prevent unauthorised access by third parties.

Enter your existing password each time you login again and confirm by pressing **Log in**.

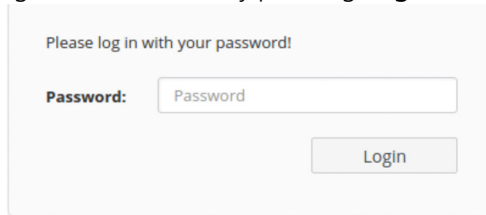A screenshot of a login form. At the top, it says "Please log in with your password!". Below this, there is a label "Password:" followed by a text input field containing the placeholder text "Password". To the right of the input field is a "Login" button.

Logging out



Log out of the web interface by clicking **Log out**.

Language selection



Select the desired language in the language selection list.

The central areas of the web interface and their sub-categories are listed on the left edge. Click the entry for an area to move directly into it.

 Overview

 WiFi

 Powerline

 LAN

 System

Making changes

Once you make a change, two icons are shown on the corresponding menu page:

- **Disk** icon: Your settings are being saved.
- **X** icon: The operation is being cancelled. Your settings are not being saved.

Required fields

Fields with a red border are required fields. This means entries must be made in these fields to continue with the configuration.

Help text blank fields

Fields that have not been filled in yet contain greyed out help text, which indicates the required content for the field. This help text disappears immediately once content has been entered.

Default settings

Some fields contain default settings which ensure the greatest amount of compatibility and ease of use. Default settings are identified with an * in drop-down menus.

Default settings can of course be replaced with customised information.

Recommended settings

Some fields include recommended settings.

Recommended settings can of course be replaced with customised information.

Tables

You can make changes within a table by clicking the corresponding table row in **Time Control** and **Parental Control**. In edit mode, the corresponding table rows have a blue background. In edit mode, the corresponding table rows have a blue background.

Invalid entries

Entry errors are either highlighted by a red border or error messages are shown.

Buttons

Click the **Disk** icon to save the settings for the respective web interface area.

Click the **X** icon or use the **Menu path** above the buttons to exit the respective web interface area.

Click the **Recycle bin** icon to delete an entry.

Click the **Arrow** icon to refresh a list.

4.3 Overview

The **Overview** area shows the status of the devolo Magic 2 WiFi next and the connected LAN, PLC and Wi-Fi devices.

System	
Information	
Name:	devolo-908
Serial number:	1808086461002908
Firmware version:	5.3.1 (2019-08-15)

Powerline	
Local Device	
Network:	Connected
Network	
Connected clients:	3

WiFi	
2.4 GHz	
Current channel:	11 (auto)
Enabled SSID:	Magic
Connected Wi-Fi clients:	1
5 GHz	
Current channel:	36 (auto)
Enabled SSIDs:	Magic
Connected Wi-Fi clients:	2

LAN	
Ethernet	
Port 1:	Not connected
Port 2:	Not connected
IPv4	
Protocol:	DHCP
Address:	192.168.1.72
Subnet mask:	255.255.255.0
Default gateway:	192.168.1.254
DNS server:	192.168.1.254
IPv6	
Protocol:	DHCPv6
Address/Subnet:	2a00:6020:15ee:7400:babe:faff:fe0b:1893/64

4.3.1 System

Name: Device name

Serial number: Device serial number

Firmware version: Firmware version of the device

4.3.2 Wi-Fi

2.4 GHz

Current channel: used frequency channel in the 2.4-GHz frequency range

Enabled SSID: name of the enabled Wi-Fi network

Connected Wi-Fi clients: number of devices connected to the network.

5 GHz

Current channel: used frequency channel in the 5-GHz frequency range

Enabled SSIDs: Name of the enabled Wi-Fi networks

Connected Wi-Fi clients: number of devices connected to the network.

4.3.3 Powerline

Local device

Network: status information "connected" or "not connected"

Network

Connected clients: number of devices connected to the Powerline network

4.3.4 LAN

IPv4

Protocol: Display indicating whether DHCP is switched on or switched off

Address: IPv4 address in use

Subnet mask: IPv4 network mask in use

Default gateway: IPv4 gateway in use

Name server: DNSv4 server in use

IPv6

Protocol: Display indicating whether DHCPv6 is switched on or switched off

Address/subnet: Address/subnet mask in use

4.4 Wi-Fi

Make all changes to your wireless network in the **Wi-Fi** area.

WiFi Clients

Status	MAC Address	Manufacturer	Frequency band	Network name	Tx rate (Mbps)	Rx rate (Mbps)	Since
	D0:D2:80:2C:3E:C8	Apple, Inc.	2.4 GHz	devolo-050	n/a	n/a	0 Tage, 02:30:15
	A4:D8:30:FF:9A:82	Liteon Technology...	2.4 GHz	devolo-050	n/a	n/a	0 Tage, 01:02:26
	E4:F0:42:18:CD:BD	Google, Inc.	5 GHz	devolo-050	263	390	0 Tage, 02:09:37

WiFi Network

Active	Network name	Encryption	Frequency band	Current channel	Connected clients
	devolo-050	WPA2 Personal	2.4 GHz	1 (auto)	0
	devolo-050	WPA2 Personal	2.4 GHz	1 (auto)	0
	devolo-050	WPA2 Personal	5 GHz	100 (auto)	1
	devolo-guest-050	WPA2 Personal	5 GHz	100 (auto)	0
	devolo-guest-050	WPA2 Personal	2.4 GHz	1 (auto)	0
	devolo-guest-050	WPA2 Personal	5 GHz	100 (auto)	0

4.4.1 Status

You can see the current status of your Wi-Fi network configuration here, e.g. the connected Wi-Fi stations, the MAC address, the selected frequency band, the SSID, the transfer rates and the connection duration.

4.4.2 Wi-Fi networks

You can make all necessary changes to your Wi-Fi network here.

WiFi Network Mode

2.4 GHz + 5 GHz

2.4 GHz

5 GHz

off

Use common settings ☒

2.4 GHz + 5 GHz

Network name 2.4
+ 5 GHz

Magic

Channel 2.4 GHz:

Auto (all channels)

Channel 5 GHz:

Auto (all channels)

Hide SSID: ☐

Encryption:

none

WPA/WPA2

WPA2

WPA3/WPA2

WPA3

.....



One of the following key is required: a passphrase with a length of 8 to 63 characters or a pre-shared key with a length of 64 characters.

Wi-Fi network mode

The devolo Magic 2 WiFi next supports both the parallel operation of the Wi-Fi frequency bands and their separate use.

The **Wi-Fi network mode** field lets you define your preferred setting by clicking the respective field:

- **2.4 GHz + 5 GHz** – Both frequency bands are used
- **2.4 GHz** – Only the 2.4 GHz frequency band is used
- **5 GHz** – Only the 5 GHz frequency band is used
- **Off** – If desired, you can completely switch off the Wi-Fi section of your devolo Magic 2 WiFi next here.

Keep in mind that after saving this setting, you will be disconnected from any existing wireless connection to the devolo Magic 2 WiFi next. In this case, configure the device over Ethernet.

Network name

The **network name (SSID)** determines the name of your wireless network. You can see this name when logging onto the Wi-Fi, allowing you to identify the correct Wi-Fi network.

Channels

There are 13 channels available in the **2.4 GHz** frequency band. The channels recommended for Europe are channels 1, 6 and 11. This ensures the frequency bands of the channels do not overlap and any connection problems are avoided.

There are 19 channels available in the **5 GHz** frequency band.

The channel selection default setting is **Automatic**.

The devolo Magic 2 WiFi next regularly and automatically executes the channel selection in this setting. In other words, if the last connected station logs out, a search for a suitable channel is carried out immediately. If no stations are connected, the device automatically selects a channel every 15 minutes.

It is worth noting that connected devices also have to support the increased frequency band of 5 GHz. From channel 52 onward you go into the radar range. When accessing the device for the first time, a radar detection phase (DFS) starts automatically, during which time the devolo Magic 2 WiFi next cannot be accessed via Wi-Fi. This can take up to 10 minutes.

In the **Channel** field, you can manually select a 2.4 GHz and a 5 GHz channel. If you are not sure which wireless channels are used by nearby devices, select the **Automatic** option.

Hide SSID:

The **SSID** specifies the name of your wireless network. You can see this name when logging onto the Wi-Fi, allowing you to identify the correct subnet.

If the **Hide SSID** option is disabled, your network name is visible. If this option is disabled, potential network users must know the exact SSID and enter it manually to be able to set up a connection.



Some Wi-Fi stations have difficulty connecting to hidden wireless networks. If the connection to a hidden SSID poses problems, first try to set up the connection with a visible SSID and only then try to hide it.

Security

The **WPA/WPA2/WPA3 Personal (Wi-Fi Protected Access)** security standard is available for securing data transmission in your wireless network. This method allows for individualised keys consisting of **letters and numbers and the depicted special characters with a length of up to 63 characters**. You can simply enter them into the **Key** field via the keyboard.

4.4.3 Guest network

If you have friends or acquaintances visiting and you want to provide them with Internet access but without giving away the password for your Wi-Fi, you can set up a separate guest account in addition to the main Internet connection. The guest account can have its own network name, time limit and Wi-Fi password. This way your visitors can browse the Internet without having access to your local network.

☒ Enable

The guest network does only allow access to the Internet.

Frequency band: 2.4 GHz + 5 GHz

Network name: Guest

Encryption: none WPA/WPA2 WPA2 WPA3/WPA2 WPA3

One of the following key is required: a passphrase with a length of 8 to 63 characters or a pre-shared key with a length of 64 characters.

The QR-Code gives you easy access to the guest network using mobile devices such as smartphones or tablets. While scanning the QR-code the credentials for the guest network will be transferred to your mobile device.



Automatic Shutoff

☒ Enable

Select a time period. The guest WiFi network is automatically switched off after this period has elapsed.

Selected time period:

2 h

To set up a guest account, activate the **Enable** option.

The guest account has an **Automatic shutoff** feature. This feature automatically disables the guest network once the selected time period ends.

You can use the **Enable** option to activate the shut-off feature.



*You can also enable or disable the guest account in the **devolo Home Network App** using the **Guest account** button.*

Frequency band

In the **Frequency band** field, you select the frequency band mode you are using (see Chapter **Wi-Fi network mode**).

Network name

Define the name of the guest network in the **Network name** field.

Key

You should also encrypt the guest account to prevent anyone in signal range from intruding into your network and, for example, sharing your Internet connection. The **WPA/WPA2/WPA3 (Wi-Fi Protected Access)** security standard is available for this.

This method allows for individualised keys consisting of **letters and numbers with a length of up**

to 63 characters. You can simply enter them via the keyboard.

To do so, enter a corresponding number of characters into the **Key** field.

QR code

Using the QR code, you can conveniently set up the connection to the guest network for mobile devices. Scanning the QR code automatically transfers the credentials for the guest network to the respective mobile device. The QR code is visible only if the guest network has been enabled.

4.4.4 Mesh

Mesh

All devolo Magic Wi-Fi adapters offer mesh Wi-Fi, which entails completely new and improved Wi-Fi functions:

- **Multi-user MIMO technology**

More often than not, you use multiple end devices in your Wi-Fi network, such as a smartphone, tablet, smart TV or a game console. This can present a real challenge for your Wi-Fi network—it has to regulate the distribution of data streams from the Wi-Fi access point (e.g. router, devolo device) to the end devices.

Multi-user MIMO technology makes it possible for your devolo device to supply your smartphone, tablet and other devices with data streams simultaneously—at the speed you require and at an efficient transfer rate.

Thanks to Multi-user MIMO technology, you can finally enjoy using the Internet without long wait times during online gaming, sporadic drop-outs while streaming in HD or slow downloads.

- **Fast roaming** (IEEE 802.11r) streamlines the registration process for Wi-Fi end devices, such as smartphones or tablets, when switching to another Wi-Fi hotspot.

 *The feature **Fast roaming** is not compatible with all Wi-Fi clients. If there will be connection problems with one of your devices, please deactivate these option.*

In factory default condition of the devolo Magic 2 WiFi next **Fast roaming** is turned off by default.

- In addition, the new **air-time fairness** feature processes the requests of high-speed Wi-Fi clients at higher priority. This prevents older devices, which may require more time for a download, from creating Wi-Fi bottlenecks.

- The **access-point steering** feature (**AP steering**) function enhances your Wi-Fi access point by adding intelligent network optimisation. This function actively helps your end devices connect to the optimal network access point. If the Wi-Fi access point identifies another Wi-Fi access point within your own network that has a stronger signal and better reception, it redirects the end device to that point automatically.

 *In particular, older smartphones, tablets and the like will remain connected to their Wi-Fi access point (e.g. router, devolo device) until the signal gets interrupted. Only then will they switch to a new Wi-Fi access point with better reception.*

- Integrated **band steering** ensures that all Wi-Fi stations automatically switch to the optimum frequency band (2.4 and 5 GHz frequency band) in order to use the best Wi-Fi connection at all times.

In order to turn the mesh functions on, activate the **Enable** option.

The mesh function of the devolo Magic 2 WiFi next is switched on by default.

Mesh WiFi

Enabling the Mesh functionality features will optimize your inhome WiFi network experience while using your mobile devices. Inhome roaming solves your sticky client problem. AP Steering, Band Steering and Dynamic Frequency Selection provides WiFi access even with many clients and Airtime Fairness optimizes your bandwidth.

☒

Enable

Features

IEEE 802.11r (also called "Fast Roaming") accelerates the login of a WiFi device to this WiFi access point. Requirement: The device was already connected to another WiFi access point with 802.11r enabled, identical network name (SSID), and identical encryption. Unfortunately, 802.11r is not compatible with every WiFi device. If you experience problems with any of your devices, please disable this option.

☐

IEEE 802.11r

WiFi Clone

WiFi Clone allows you to apply the WiFi access data (network name and WiFi password) of another WiFi access point to this device automatically. This requires that you start the configuration process and then press the WPS button on the device containing the WiFi access data (SSID and WiFi password) to be applied.

Start Configuration

WiFi Clone

WiFi Clone makes it possible to simply copy the Wi-Fi configuration data of an existing Wi-Fi access point (e.g. your Wi-Fi router) to all Wi-Fi access points (Single SSID). Start the procedure with the **Start Configuration** option and then press the WPS button of the device with the Wi-Fi access data (SSID and Wi-Fi password) to be applied.

4.4.5 Schedule control

The **Schedule control** area lets you define when and if your Wi-Fi is switched on and off.

WiFi schedule settings

WiFi schedule control

☒

Enable

WiFi convenience function

☒

Enable

When the WiFi convenience function is activated, the wireless network is not switched off until the last WiFi device has logged off from your access point.

Please note that many tablets/smartphones maintain their WiFi connection indefinitely!

Overview of the wifi schedule settings

Monday Tuesday Wednesday Thursday Friday Saturday Sunday

0 6 12 18 0 6 12 18 0 6 12 18 0 6 12 18 0 6 12 18 0 6 12 18

WiFi enabled WiFi disabled

Configuration

Here you can define the time intervals for when you want your WiFi to be activated.

+

Interval	From	to
Mon-Fri	18:30	24:00

Enabling Wi-Fi schedule control

In order to be able to use time control, activate the **Enable** option.

Configuration

You can define multiple time periods during which your wireless network is to be enabled for each

weekday. Then the time control automatically switches the wireless network on or off.

Automatic disconnection

If you enable the **Automatic disconnection** option, the wireless network is not switched off until the last station has logged off.

Manually switching the device on and off (using a button) always has priority over automatic time control. The configured time control then takes effect automatically during the next defined time period.

4.4.6 Parental control

You can regulate Wi-Fi access for specific devices based on time using this function. For instance, to prevent your children from using the Internet excessively, you can define how long they may use the Wi-Fi per day. Synchronisation with an (Internet) time server is necessary to be able to use the parental control. In this case, the time server (**System** → **Management** → **Time Server (NTP)**) for the devolo Magic 2 WiFi next ac has to be enabled and an active Internet connection is also required.



The time server pool.ntp.org is enabled by default. You can find more information in Chapter 4.7.2 Management.

If you would like to set up a **time quota** (usage time in hours) or a **time period** (active from/to), activate the **Enable** option. Now enter the MAC addresses of the devices you want to set up parental control for.

Under **Type**, define either a **time quota** (time limit) or a **time period** for when you want the MAC addresses entered to receive Internet access. Under **Select interval**, select the desired time frame.

Parental control

☒ Enable

A1:55:EE:5E:14:8E

Configuration

Please note that WiFi schedule Settings have precedence over these settings!

You can limit access to certain Wi-Fi devices by the MAC address. Please define the time periods during which Wi-Fi access is allowed.

MAC address	Type			
A1:55:EE:5E:14:8E	Interval	Sat+Sun	10:00	20:00
A1:55:EE:5E:14:8E	Interval	Mon-Fri	18:15	20:00

Setting the time quota

Under **Time Quota**, the time limit can be selected.

Confirm your settings by clicking the **Disk** icon.

Setting the time period

Under **Time Period**, the desired time period can be selected. After entering the interval, enter the desired start and end times in hour and minute format.

Confirm your settings by clicking the **Disk** icon.

If you want to delete a time quota (time limit) or a time period from the list, click/touch the **dustbin** icon.

4.4.7 Wi-Fi Protected Setup (WPS)

Wi-Fi Protected Setup (WPS) is one of the international encryption standards developed by the Wi-Fi Alliance for easily and quickly setting up a secure wireless network. The encryption keys of the respective Wi-Fi devices are transmitted automatically and continuously to the other Wi-Fi device(s) in the wireless network.

Enabling WPS encryption

In order to be able to use WPS encryption, activate the **Enable** option.

WiFi Protected Setup (WPS) - Configuration

☒ Enable

Network name: devolo-050

WPS Mode: WPS Pushbutton

Start

Add devices to the WiFi network using the soft push button. Now press the WPS button on the device being added to your WiFi network.

WPS PIN

Enter WPS PIN

Start

Add devices to the WiFi network using your PIN. Enter the PIN of the device to be added to your WiFi network.

76%

WPS Pushbutton is active...

The devolo Magic 2 WiFi next offers two different variants for transmitting these encryption keys:

WPS using WPS pushbutton

- 1 Start the encryption process on the devolo Magic 2 WiFi next
 - By pressing the **Wi-Fi** button on the **front side of the device** or
 - By pressing the corresponding **Start** button on the user interface under **Wi-Fi → WPS Pushbutton**.
- 2 Then either press the WPS key of the Wi-Fi device you are adding or enable the WPS mechanism in the Wi-Fi settings of the Wi-Fi device. Now the devices exchange their encryption keys and establish a secure Wi-Fi connection.

tion. The Wi-Fi LED on the front panel indicates the synchronisation process by flashing.

WPS via PIN

To interconnect Wi-Fi devices in your wireless network securely using a PIN variant, go to the web interface and, under **Wi-Fi → WPS → WPS PIN**, enter the WPS PIN generated by your Android smartphone or tablet and start the encryption process by pressing the corresponding **Start** button.

Use of the **WPS** method implies the use of the **WPA/WPA2** encryption standard. Therefore take note of the following automatic settings:

- If under **Wi-Fi → Wi-Fi networks**, the **No encryption** option is selected in advance, **WPA2** is set automatically. The newly generated password is displayed under **Wi-Fi → Wi-Fi networks** in the **Key** field.
- If under **Wi-Fi → Wi-Fi networks**, the **WPA/WPA2** option is selected in advance, this setting **remains** with the previously assigned password.

4.4.8 Neighbour networks

The **Neighbour networks** area displays visible wireless networks in your surroundings.

Network name	Channel	Signal quality (%)
devolo-183	100	94
DVT-3490-5	124	94
devolo-183	11	94
NETGEAR70_jonas_r	6	94
Loft TV.b	6	94
DVT-3490-2	1	94
devilo24	1	94
devolo-159	1	94
ASUS_7437b8fde68	9	94
NETGEAR-2	2	94

4.5 Powerline

Make all changes to your PLC network in the **Powerline** area.

Powerline Network

To form one Powerline network, all devices need to receive a common encryption password.

This happens automatically if you initiate pairing by pressing the Powerline button on two or more devices in succession. The automatically generated password of the first device will be assigned to all other devices.

Instead of pressing the physical button on the device itself, you can also activate the following button.

When you activate the following button, the current password will be deleted.

Instead of the auto-generated password, you can also assign your own password for encryption. The same password must be entered for all devices which should be part of the same Powerline network.

Powerline password:

Powerline domain name:

In order to use a new devolo Magic 2 WiFi next in your devolo Magic network, first you have to connect it to your existing devolo Magic adapters devices as a network. This is accomplished by using a shared password. This can be assigned in different ways:

- Using **devolo Cockpit** or the **devolo Home Network App** (see Chapter 3.4 **Installation of devolo software**),
- Only using the **PLC button** (see Chapter 2.3 **Pairing – Establishing a PLC connection** and 3.3 **Connecting the devolo Magic 2 WiFi next**)

- Using the web interface, in the **PLC** menu; as described below:

Pairing – Using on-screen button

- 1 Click **Start pairing** to start the pairing operation. This may take some time.
- 2 As soon as the new devolo Magic adapter is integrated into your existing network, it appears in a list of available and established connections.

Pairing – Using custom password

You can also assign your network a custom PLC password you pick yourself. Enter this password for each devolo Magic adapter in the **Network password** field and confirm your settings by clicking the **Disk** icon.

Note that the custom password is not assigned to the whole PLC network automatically. Instead, you must assign it separately to each of your devolo Magic adapters.


Unpairing – Removing an adapter from a network

- 1 To remove a devolo Magic adapter from your devolo Magic network, click **Leave Powerline network**.

- 2 Wait until the LED flashes red and then disconnect the devolo Magic adapter from the mains supply.

Compatibility mode

Using as VDSL connection may negatively impact the performance of the bandwidth connection by crosstalk of the signal.

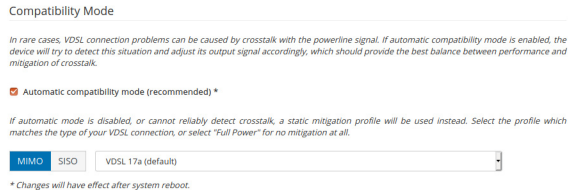

In order to mitigate any potential negative effects the device provides the following options:

Automatic compatibility mode

If the option **Automatic compatibility mode (recommended)** is enabled, the device can automatically adjust the output signal to avoid interference as much as possible. This option is configured by default.

Manual compatibility mode

If an interference has not been eliminated despite activating the automatic setting, please disable it

and set the compatibility mode as well as the signal transmission profile manually:

- MIMO
 - ☐ Full power
 - ☐ VDSL 17a (default)
 - ☐ VDSL 35b
- SISO
 - ☐ Full power
 - ☐ VDSL 17a (default)
 - ☐ VDSL 35b



Get in touch with your internet provider to find out which signal transmission profile is the best option for your internet connection.

The MIMO operating mode and the VDSL 17a signal transmission profile are configured by default.

Connections

The table lists all available and connected devolo Magic adapters for your network along with displaying the following details:

Connections

Device ID *	MAC address	Transmit (Mbps)	Receive (Mbps)
1	B8:BE:F4:00:04:B3	1161	1249
2	B8:BE:F4:03:05:5B	1064	1417
3	B8:BE:F4:00:00:02	562	493
4	30:D3:2D:A9:80:C2	591	886
5 (this device)	B8:BE:F4:3D:66:C5	---	---

Device ID: Device ID* (number) of the respective devolo Magic adapter in the devolo Magic network

* indicates the local devolo Magic adapter

MAC address: MAC address of the respective devolo Magic adapter

Send (Mbps): Rate for sending data

Receive (Mbps): Rate for receiving data

4.6 LAN

You make changes to the network settings in the **LAN** area.

Ethernet

Port 1:

Not connected

Port 2:

Not connected

Ethernet

30:D3:2D:AF:8B:B9

IPv4

Protocol:

DHCP

Address:

172.25.201.89

Subnet mask:

255.255.0.0

DNS server:

172.25.1.12

IPv6

Protocol:

DHCPv6

Address:

2a00:fe03:313:25:32d3:2dff:feaf:8bb9

Subnet mask:

64

4.6.1 Status

You can see the current LAN status of the devolo Magic adapters here. The **Ethernet** area shows the network devices connected to the two

network connectors **Port 1 and Port 2** (e.g. PC, NAS, etc.).

IPv4/IPv6

Depending on how the devolo Magic 2 WiFi next is connected to the Internet (IPv4 or IPv6), current network information is displayed, such as **Address**, **Subnet mask**, **Standard gateway** and **DNS server**.

4.6.2 IPv4/IPv6 configuration

In the factory default settings, only the **Retrieve network settings from a DHCP server** option for **IPv4** is enabled. This means that the IPv4 address is retrieved automatically from a DHCP server. The currently assigned network data are visible (greyed out).

If a DHCP server is already present on the network for assigning IP addresses (e.g. your Internet router), you should leave the **Retrieve network settings from a DHCP server** option enabled so that the devolo Magic 2 WiFi next automatically receives an address from it.

If you want to assign a static IP address, make entries accordingly for the **Address**, **Subnet mask**, **Default gateway** and **DNS server** fields.

Confirm your settings by clicking the **Disk** icon.

Then, restart the devolo Magic adapter (see Chapter **4.7.3 Configuration**) to ensure that your changes take effect.

IPv6 configuration

If you want automatic IP address assignment and there is already a DHCP server present on the network for assigning IP addresses (e.g. your Internet router), enable the **Retrieve network settings from a DHCP server** option to ensure that the devolo Magic 2 WiFi next automatically receives an address from it.

If you want to assign a static IP address, make entries accordingly for the **Address**, **Subnet mask**, **Default gateway** and **DNS server** fields.

Confirm your settings by clicking the **Disk** icon.

4.7 System

In the **System** area, you can configure the settings for security and other devolo Magic adapter device functions.

4.7.1 Status

Here you can view the most important information on the devolo Magic adapter, including the current date and time, time zone, MAC address of the

adapter, status of the Wi-Fi and Powerline LEDs and the two operating buttons.

Date and Time

Local time:

10.09.2018 14:51

Time zone:

Europe/Aachen

Time server 1:

europe.pool.ntp.org

MAC Addresses

Ethernet

30:D3:2D:AF:8B:B9

LEDs

WiFi LED:

Enabled

Powerline LED:

Enabled

Buttons

PLC button:

Enabled

WiFi button:

Enabled

4.7.2 Management

System information lets you enter user-defined names in the **Device name (hostname)** and **Device location** fields. Both pieces of information are particularly helpful if multiple devolo Magic adapters are to be used and identified in the network.

Under **Change access password**, a login password can be set for accessing the web interface.

By default, the built-in web interface of the devolo Magic 2 WiFi next is not protected by a password. We recommend assigning a password when the installation of the devolo Magic 2 WiFi next is complete to protect it against tampering by third parties.

i

To do so, enter the desired new password twice. Now the web interface is protected against unauthorised access with your custom password!

In **Power Management**, you can enable Power-save mode and Standby mode on the devolo Magic 2 WiFi next.

If **Powersave** mode has been enabled, the devolo Magic 2 WiFi next switches to PowerSave mode automatically whenever reduced data transmission over ethernet is detected.

i

The latency (time for transmitting a data packet) may be negatively affected.

If **Standby** mode is enabled, the devolo Magic 2 WiFi next automatically switches to Standby mode if no ethernet connection has

been enabled, i.e. if no network device (e.g. computer) is switched on and connected to the network interface and if Wi-Fi is disabled.

In this mode, the devolo Magic 2 WiFi next is not accessible over the Powerline network. As soon as the network device (e.g. computer) connected to the network interface is switched on again, your adapter can also be accessed over the electrical wiring again.

Powersave mode is disabled in the devolo Magic 2 WiFi next factory default settings.

Standby mode is enabled in the devolo Magic 2 WiFi next factory default condition.

The **LED settings** let you disable the LED status display of the **Wi-Fi** and **Powerline** LEDs.

An error status is indicated by corresponding flashing behaviour regardless of this setting.



For information on the LED behaviour of the devolo Magic adapter in standby mode, refer to Chapter 2.3.1 Reading the PLC indicator light.

You can completely disable the **operating buttons** on the devolo Magic adapter in order to pro-

tect yourself against possible changes. Simply disable the **Enable PLC button** or **Enable Wi-Fi button** option.

The operating buttons are enabled in the devolo Magic 2 WiFi next factory default settings.

Under **Time zone**, you can select the current time zone, e.g. Europe/Berlin. The **Time server (NTP)** option lets you specify a time server. A time server is a server on the Internet whose task consists of providing the exact time. Most time servers are coupled with a radio clock. Select your time zone and time server; the devolo Magic 2 WiFi next automatically switches between standard time and summer time.

4.7.3 Configuration

Saving the device configuration

To save the enabled configuration to your computer as a file, select the corresponding button in the **System → Configuration → Save Configuration to File** area. The system starts downloading the current device configuration.

Restoring the device configuration

An existing configuration file can be sent to the devolo Magic 2 WiFi next in the **System → Confi-**

guration area and enabled there. Select a suitable file via the **Select file ...** button and start the operation by clicking the **Restore** button.

Factory Settings

The devolo Magic 2 WiFi next is reset to the original factory defaults in the **System → Configuration** area with the **Factory Reset** option.

 *Doing so causes you to lose your personal Wi-Fi and PLC settings. The last-assigned passwords for the devolo Magic 2 WiFi next are also reset.*

For backup purposes, all active configuration settings can be transmitted to your computer, stored there as a file and reloaded into the devolo Magic 2 WiFi next. This function can be useful for creating a variety of configurations that will let you quickly and easily set up the device for use in different network environments.

Reboot device

In order to reboot the devolo Magic 2 WiFi next, select the **Reboot** button in the **System → Configuration** area.

4.7.4 Firmware

The firmware of the devolo Magic 2 WiFi next includes the software for operating the device. If necessary, devolo offers new versions on the Internet as a file download, for example to modify existing functions.

Current firmware

The currently installed firmware of the devolo Magic 2 WiFi next is displayed here.

Searching for and updating firmware automatically

The adapter can also look for up-to-date firmware automatically. To do this, enable the **Regularly check for firmware updates** option.

 *The devolo Magic 2 WiFi next lets you know when a new firmware version becomes available. The option is enabled by default.*

The **Automatically install firmware updates** option allows the adapter to automatically install the firmware it has found.

 *The devolo Magic 2 WiFi next automatically updates its firmware. The option is enabled by default.*

Download updated firmware

- 1 If you have downloaded an updated firmware file for the devolo Magic 2 WiFi next to your computer, navigate to the **System** → **Firmware** → **Update firmware** area. Click **Browse ...** and select the downloaded file.
- 2 Confirm the update procedure with **Update firmware**. After a successful update, the devolo Magic 2 WiFi next restarts automatically.

Ensure that the update procedure is not interrupted.

4.7.5 Config Sync

Config Sync allows settings to be configured uniformly for all devolo Magic devices in the network. This includes the following settings e.g.:

- Wi-Fi network
- Guest network
- Mesh Wi-Fi
- Time control and time server settings.

In order to switch Config Sync on, activate the **Enable** option.



Please note that the Wi-Fi is always switched on or off for the entire network. Therefore, stop Config Sync first on a device that you want to configure or switch separately.

5 Appendix

5.1 Technical specifications

Security	128 Bit AES
Device port	2x RJ45 (Gigabit Ethernet port)
Power consumption	Maximum: 12.1 W Typical: 8.9 W Stand-by: 3.1 W
Power supply	internal 196-250 V AC 50 Hz
Temperature (Storage/Operating)	-25°C to 70 °C / 0°C to 40°C
Dimensions (in mm, without plug)	152x76x40 (HxWxD)
Ambient conditions	10-90% Humidity, non-condensing
Certifications	CE

5.2 Bandwidth optimization

To significantly improve the transmission capacity of the network, we recommend that you comply with the following "connection rules":

- Plug the devolo Magic 2 WiFi next directly into a wall socket. Avoid using power strips. This may impair the transmission of the PLC signals.
- If there are several sockets in the wall directly next to each other, they behave like a power strip. Individual sockets are optimal.

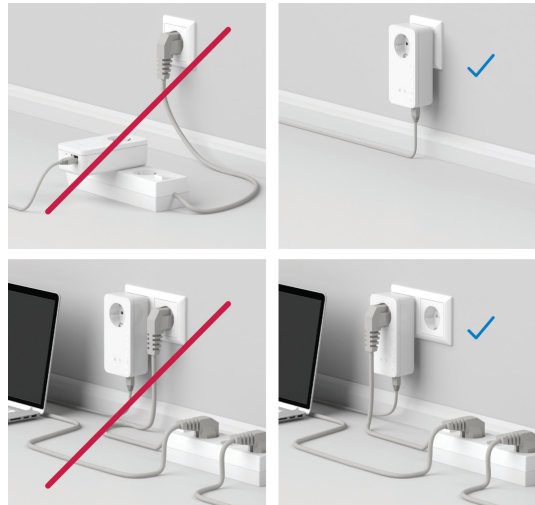


Fig.5: devolo Magic bandwidth optimization

5.3 Frequency range and transmitting power

Technical specifications in the 5 GHz frequency range

Frequency range	5 GHz
IEEE standard	802.11 a/h 802.11 n 802.11 ac
Indoor frequency range	5150 – 5350 MHz
Indoor & outdoor frequency range	5150 – 5725 MHz (802.11 a/h, n) 5150 – 5350 MHz / 5470 – 5725 MHz (802.11 ac)
Channel band-width	20 MHz (802.11 a/h) 20 MHz, 40 MHz (802.11 n) 20 MHz, 40 MHz, 80 MHz, 160 MHz (802.11 ac)

Frequency range	5 GHz
Max. indoor transmission power (EIRP)	200 mW (channel 36 – 64) / 23 dBm
Max. transmitting power	1,000 mW (channel 100 – 140) / 30 dBm

Technical specifications in the 2.4-GHz frequency range

Frequency range	2.4 GHz
IEEE standard	802.11 b 802.11 g 802.11 n
Indoor frequency range	–
Indoor & outdoor frequency range	2399.5 – 2484.5 MHz
Channel band-width	20 MHz (802.11 b/g) 20 MHz, 40 MHz (802.11 n)

Frequency range	2.4 GHz
Max. indoor transmission power (EIRP)	100 mW / 20 dBm
Max. transmitting power	100 mW / 20 dBm

5.4 Channels and carrier frequencies

Channels and frequencies in the 5-GHz band

Channel	Carrier frequency
36	5180 MHz
40	5200 MHz
44	5220 MHz
48	5240 MHz
52	5260 MHz
56	5280 MHz
60	5300 MHz
64	5320 MHz
100	5500 MHz
104	5520 MHz
108	5540 MHz
112	5560 MHz
116	5580 MHz

Channel	Carrier frequency
120	5600 MHz
124	5620 MHz
128	5600 MHz
132	5660 MHz
136	5680 MHz
140	5700 MHz

Channels and frequencies in the 2.4 GHz band

Channel	Carrier frequency
1	2412 MHz
2	2417 MHz
3	2422 MHz
4	2427 MHz
5	2432 MHz
6	2437 MHz
7	2442 MHz

Channel	Carrier frequency
8	2447 MHz
9	2452 MHz
10	2457 MHz
11	2462 MHz
12	2467 MHz
13	2472 MHz

5.5 Disposal of old devices

To be used in the countries of the European Union and other European countries with a separate collecting system:



The icon with crossed-out wastebasket on the device means that this product is an electrical or electronic device that falls within the scope of application of the European Community WEEE Directive. These types of devices may no longer be disposed of with household waste. Rather they can be given to a municipal collection point free of charge. Contact your municipal government to find out the address and hours of the nearest collection point.

5.6 Warranty conditions

If your devolo device is found to be defective during initial installation or within the warranty period, please contact the vendor who sold you the product. The vendor will take care of the repair or warranty claim for you. The complete warranty conditions can be found at www.devolo.global/support.

Index

A

Access Point Steering 38

Adapter equipment 14

Air-time fairness 13, 38

B

Band steering 13, 38

C

CE 9

Changing/assigning the network password 15, 26

Config Sync 50

D

Default WiFi key 20

devolo App 27

devolo Cockpit 27

devolo Magic 12

devolo software 27

DHCP server 46

Disposal of old devices 55

Dynamic Frequency Selection 13

E

Expanding an existing devolo Magic network 15

F

Factory default settings 23, 28

I

Integrated electrical socket 23

Intended use 9

IPv4 46

L

LAN (network connection) 23

LED status display 14

Login password 29

M

Mesh 37

Multi-user MIMO technology 13, 37

N

Network connection 23

O

Operating buttons 48

P

Package contents 24

Pairing (establishing a PLC connection) 14

PLC 12

PLC status display 17

Powerline 12

R

Reset 14, 23

Roaming 13, 38

S

Safety notes 10

SSID 36

Starting up a new devolo Magic network 15

Symbol description 7

System requirements 24

T

Time server 48

W

Wi-Fi antenna 23

WiFi Clone 39

Wi-Fi status display 21

WPA/WPA2/WPA3 36, 37