

## Ruijie Reyee RG-EW6000GX Home Wi-Fi Router

**Installation Guide** 



Document Version: V1.0 Date: June 17, 2025

Copyright © 2025 Ruijie Networks

### Copyright

Copyright © 2025 Ruijie Networks

All rights are reserved in this document and this statement.

Without the prior written consent of Ruijie Networks, any organization or individual shall not reproduce, extract, back up, modify, or propagate the content of this document in any manner or in any form, or translate it into other languages or use some or all parts of the document for commercial purposes.



All other trademarks or registered trademarks mentioned in this document are owned by their respective owners.

#### **Disclaimer**

The products, services, or features you purchase are subject to commercial contracts and terms, and some or all of the products, services, or features described in this document may not be available for you to purchase or use. Except for the agreement in the contract, Ruijie Networks makes no explicit or implicit statements or warranties with respect to the content of this document.

The names, links, descriptions, screenshots, and any other information regarding third-party software mentioned in this document are provided for your reference only. Ruijie Networks does not explicitly or implicitly endorse or recommend the use of any third-party software and does not make any assurances or guarantees concerning the applicability, security, or legality of such software. You should choose and use third-party software based on your business requirements and obtain proper authorization. Ruijie Networks assumes no liability for any risks or damages arising from your use of third-party software.

The content of this document will be updated from time to time due to product version upgrades or other reasons, Ruijie Networks reserves the right to modify the content of the document without any notice or prompt.

This manual is designed merely as a user guide. Ruijie Networks has tried its best to ensure the accuracy and reliability of the content when compiling this manual, but it does not guarantee that the content of the manual is completely free of errors or omissions, and all the information in this manual does not constitute any explicit or implicit warranties.

### **Preface**

### **Intended Audience**

This document is intended for:

- Network engineers
- Technical support and servicing engineers
- Network administrators

### **Technical Support**

- Ruijie Reyee website: <a href="https://reyee.ruijie.com">https://reyee.ruijie.com</a>
- Online support center: <a href="https://reyee.ruijie.com/en-global/support">https://reyee.ruijie.com/en-global/support</a>
- Case portal: <a href="https://www.ruijie.com/support/caseportal">https://www.ruijie.com/support/caseportal</a>
- Community: <a href="https://community.ruijienetworks.com">https://community.ruijienetworks.com</a>
- Email support: service\_rj@ruijie.com
- Live chat: <a href="https://reyee.ruijie.com/en-global/rita">https://reyee.ruijie.com/en-global/rita</a>

### Conventions

### 1. Signs

This document also uses signs to indicate some important points during the operation. The meanings of these signs are as follows:



An alert that calls attention to safety instruction that if not understood or followed can result in personal injury.

### Warning

An alert that calls attention to important rules and information that if not understood or followed can result in data loss or equipment damage.

### ▲ Note

An alert that calls attention to essential information that if not understood or followed can result in function failure or performance degradation.

### Instruction

An alert that contains additional or supplementary information that if not understood or followed will not lead to serious consequences.

### Specification

An alert that contains a description of product or version support.

### 2. Note

This manual provides installation steps, troubleshooting, technical specifications, and usage guidelines for cables and connectors. It is intended for users who want to understand the above and have extensive experience in network deployment and management, and assume that users are familiar with related terms and concepts.

## Contents

Pr	eface	I
1	Product Overview	.1
	1.1 RG-EW6000GX	.1
	1.2 Package Contents	.1
	1.3 Product Appearance	.2
	1.3.1 Product Appearance	.2
	1.3.2 Ports and LEDs	.3
	1.4 Specifications	.4
	1.5 Power Consumption	.7
	1.6 Cooling	.7
2	Preparing for Installation	.8
	2.1 Safety Guidelines	.8
	2.2 Site Requirements	.8
	2.2.1 Temperature and Humidity	.8
	2.2.2 Cleanliness	.9
	2.2.3 ESD Prevention	.9
	2.2.4 Preventing Electromagnetic Interference	.9
	2.2.5 Installation Site	10
	2.3 Tools	10
3	Installing the Router	11
	3.1 Before You Begin	11
	3.2 Safety Precautions During Installation	11

3.3 Installation Guide	11
3.4 Bundling Cables	12
3.5 Verifying Installation	12
4 Commissioning	13
4.1 Setting Up the Configuration Environment	13
4.2 Powering-on	13
4.2.1 Checklist Before Power-on	13
4.2.2 Checklist After Power-on	13
4.3 Rectifying Power Supply Failures	13
5 Monitoring and Maintenance	14
5.1 Monitoring	14
5.2 Hardware Maintenance	14
6 Common Troubleshooting	15
6.1 Troubleshooting Flowchart	15
6.2 Common Faults	15
7 Appendix	17
7.1 Appendix A Connectors and Media	17

## **Product Overview**

#### 1.1 RG-EW6000GX

The RG-EW6000GX is a gigabit wireless router designed for small- or medium-sized indoor scenarios covering apartments, villas, residential buildings, and business offices. Compliant with IEEE 802.11a/b/g/n/ac/ax, this router operates simultaneously on the 2.4 GHz and 5 GHz frequency bands. It supports 4x4 MU-MIMO, delivering access rates of up to 1,147 Mbps on the 2.4 GHz frequency band and 4,804 Mbps on the 5 GHz frequency band. The router delivers a combined data rate of up to 5,951 Mbps. In addition to one 2.5 Gbps uplink port (WAN), this router provides four gigabit Ethernet downlink ports (LAN) for connecting to wired terminals. This makes the router an ideal choice for meeting indoor wired and wireless deployment requirements.

#### 1.2 Package Contents

Table 1-1 **Package Contents** 

No.	Item	Quantity
1	RG-EW6000GX	1
2	Power adapter (12 V DC/2.5 A)	1
3	Ethernet cable	1
4	Quick Start Guide	1
5	Warranty Card	1

### Note

The package contents are subject to the purchase contract, and actual delivery may vary. Please check the items carefully against the package contents or purchase contract. If you have any questions, please contact the distributor.

## 1.3 Product Appearance

## 1.3.1 Product Appearance



## 1.3.2 Ports and LEDs



No.	Component	Description	
1	2.5GE WAN/LAN Port	10/100/1000/2500BASE-T port, which is connected to a modem or fiber-to-the-home (FTTH) Ethernet cable and can be switched to a LAN port.	
2	GE LAN/WAN Port	10/100/1000BASE-T port, which is connected to an Ethernet cable and can be switched to a WAN port.	

No.	Component	Description		
3	GE LAN Port	10/100/1000BASE-T port, which is connected to a wired terminal.		
4	Gaming Port	Default LAN po	rt and gaming port	
5	Reset	Press and hold settings.	the button for more than 3 seconds to restore factory	
6	Power	Connected to a	power adapter.	
7	Reyee Mesh Button	<ul> <li>Press and hold the button for less than 2 seconds. Reyee Mesh pairing is performed with an RG-EW series router.</li> <li>Press and hold for more than 3 seconds to enable or disable Game Turbo.</li> </ul>		
		Solid on	Reyee Mesh succeeded.	
8	Reyee Mesh LED	Off	Reyee Mesh is not performed or disconnected.	
		Blinking	Reyee Mesh is pairing.	
	9 System Status LED	Solid green	The router is operating normally with Game Turbo disabled.	
		Blinking green	The router is starting, resetting, or upgrading.	
9		Solid red	The router is not connected to the Internet.	
		Solid purple	The router is operating normally with Game Turbo enabled.	
		Solid orange	The mesh Wi-Fi signal is weak (as a secondary router).	
10	Nameplate	The nameplate is located at the bottom of the router.		

## 1.4 Specifications

Table 1-2 Technical Specifications of an RG-EW6000GX Router

Radio Design	2.4G & 5G dual-radio and four streams
Transmission Protocol	802.11a/n/ac/ax 802.11b/g/n/ax
Operating Frequency Band	802.11b/g/n/ax: 2.4 GHz to 2.4835 GHz 802.11a/n/ac/ax: 5.1 GHz (5.150 GHz to 5.350 GHz), 5.4 GHz (5.470 GHz to 5.725 GHz), 5.8 GHz (5.725 GHz to 5.850 GHz)
Antenna Type	External flat omnidirectional antenna 2.4 GHz: 5.85 dBi

	5 GHz: 5.66 dBi
Number of Spatial	2.4 GHz: 4x4 MU-MIMO
Streams	5 GHz: 4x4 MU-MIMO
Transmission Rate	Up to 1,147 Mbps access rate on the 2.4 GHz frequency band
	Up to 4,804 Mbps access rate on the 5 GHz frequency band
	Combined access rate: 5,951 Mbps
Modulation	OFDM: BPSK@6/9 Mbps, QPSK@12/18 Mbps, 16QAM@24 Mbps, and 64QAM@48/54 Mbps
	DSSS: DBPSK@1 Mbps, DQPSK@2 Mbps, and CCK@5.5/11 Mbps
	MIMO-OFDM: BPSK, QPSK, 16QAM, 64QAM, 256QAM, and 1024QAM
	OFDMA
	2.4 GHz: 20 MHz
	802.11b: -91 dBm (1 Mbps)
	802.11g: -87 dBm (6 Mbps), -72 dBm (54 Mbps)
	802.11n: -88 dBm (MCS0), -70 dBm (MCS7)
Receive Sensitivity	802.11ax: -88 dBm (MCS0), -65 dBm (MCS8), -58 dBm (MCS11)
Receive Selisitivity	5 GHz: 20 MHz
	802.11n: -88 dBm (MCS0), -70 dBm (MCS7)
	802.11a: -89 dBm (6 Mbps), -72 dBm (54 Mbps)
	802.11ac: -88 dBm (MCS0), -65 dBm (MCS8)
	802.11ax: -88 dBm (MCS0), -65 dBm (MCS8), -58 dBm (MCS11)
Maximum Transmit Power	2400 MHz to 2483.5 MHz ≤ 20 dBm (EIRP);
	5150 MHz to 5350 MHz ≤ 23 dBm (EIRP);
	5470 MHz to 5725 MHz ≤ 30 dBm (EIRP);
	5725 MHz to 5850 MHz ≤ 30 dBm (EIRP);
	Note: Country specific restrictions apply
	European Union & United Kingdom:
	2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm
	5150 MHz to 5350 MHz, EIRP ≤ 23 dBm
	5470 MHz to 5725 MHz, EIRP ≤ 30 dBm
	Myanmar:
	2400 MHz to 2483.5 MHz, EIRP ≤ 23 dBm
	5725 MHz to 5825 MHz, EIRP ≤ 30 dBm
	Thailand:
	2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm

\$470 MHz to 5725 MHz, EIRP ≤ 30 dBm     \$725 MHz to 5825 MHz, EIRP ≤ 30 dBm     Indonesia:		5150 MHz to 5350 MHz, EIRP ≤ 23 dBm
Indonesia:   2400 MHz to 2483.5 MHz, EIRP ≤ 27 dBm     5150 MHz to 5350 MHz, EIRP ≤ 23 dBm     5725 MHz to 5825 MHz, EIRP ≤ 23 dBm     Egypt:   2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm     5150 MHz to 5350 MHz, EIRP ≤ 20 dBm     5150 MHz to 5350 MHz, EIRP ≤ 20 dBm     5150 MHz to 5350 MHz, EIRP ≤ 23 dBm     0.5 dBm		5470 MHz to 5725 MHz, EIRP ≤ 30 dBm
2400 MHz to 2483.5 MHz, EIRP ≤ 27 dBm		5725 MHz to 5825 MHz, EIRP ≤ 30 dBm
5150 MHz to 5350 MHz, EIRP ≤ 23 dBm   5725 MHz to 5825 MHz, EIRP ≤ 23 dBm   Egypt: 2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm   5150 MHz to 5350 MHz, EIRP ≤ 20 dBm   5150 MHz to 5350 MHz, EIRP ≤ 23 dBm		Indonesia:
F725 MHz to 5825 MHz, EIRP ≤ 23 dBm           Egypt:           2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm           5150 MHz to 5350 MHz, EIRP ≤ 23 dBm           Adjustable Power Granularity         0.5 dBm           Dimensions (W x D x H)         200 mm x 200 mm x 43.8 mm (7.87 in. x 7.87 in. x 1.72 in., antennas not included)           Weight         0.95 kg (2.09 lbs) (without packaging materials)           1.68 kg (3.70 lbs) (with packaging materials)           1 x 10/100/1000/2500BASE-T uplink port (WAN)           4 x 10/100/1000BASE-T downlink ports (LAN)           1 x Reyee Mesh LED           1 x System Status LED           Power Supply         DC 12 V 2.5 A           Power Consumption         < 24 W           Environment         Operating temperature: -10°C to +40°C (14°F to 104°F)           Storage temperature: -40°C to +70°C (-40°F to +158°F)           Operating humidity: 20% RH to 80% RH (non-condensing)           Storage humidity: 5% RH to 95% RH (non-condensing)           Mounting         Desk mount           Wall mount         CE, CB		2400 MHz to 2483.5 MHz, EIRP ≤ 27 dBm
Egypt:         2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm           5150 MHz to 5350 MHz, EIRP ≤ 23 dBm           Adjustable Power Granularity         0.5 dBm           Dimensions (W x D x H)         200 mm x 200 mm x 43.8 mm (7.87 in. x 7.87 in. x 1.72 in., antennas not included)           Weight         0.95 kg (2.09 lbs) (without packaging materials)           1.68 kg (3.70 lbs) (with packaging materials)           Service Port         1 x 10/100/1000/2500BASE-T uplink port (WAN)           4 x 10/100/1000BASE-T downlink ports (LAN)           Status LED         1 x Reyee Mesh LED           1 x System Status LED           Power Consumption         < 24 W           Environment         Operating temperature: -10°C to +40°C (14°F to 104°F)           Storage temperature: -40°C to +70°C (-40°F to +158°F)           Operating humidity: 20% RH to 80% RH (non-condensing)           Storage humidity: 5% RH to 95% RH (non-condensing)           Mounting         Desk mount           Wall mount         CE, CB		5150 MHz to 5350 MHz, EIRP ≤ 23 dBm
2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm 5150 MHz to 5350 MHz, EIRP ≤ 23 dBm   Adjustable Power Granularity  Dimensions (W x D x H)  200 mm x 200 mm x 43.8 mm (7.87 in. x 7.87 in. x 1.72 in., antennas not included)  Weight  0.95 kg (2.09 lbs) (without packaging materials) 1.68 kg (3.70 lbs) (with packaging materials) 1.68 kg (3.70 lbs) (with packaging materials)  1 x 10/100/1000/2500BASE-T uplink port (WAN) 4 x 10/100/1000BASE-T downlink ports (LAN)  Status LED  1 x Reyee Mesh LED 1 x System Status LED  Power Supply  DC 12 V 2.5 A  Power Consumption  Environment  Operating temperature: −10°C to +40°C (14°F to 104°F)  Storage temperature: −40°C to +70°C (−40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Desk mount Wall mount  Certification  CE, CB		5725 MHz to 5825 MHz, EIRP ≤ 23 dBm
Adjustable Power Granularity         0.5 dBm           Dimensions (W x D x H)         200 mm x 200 mm x 43.8 mm (7.87 in. x 7.87 in. x 1.72 in., antennas not included)           Weight         0.95 kg (2.09 lbs) (without packaging materials) 1.68 kg (3.70 lbs) (with packaging materials)           Service Port         1 x 10/100/1000/2500BASE-T uplink port (WAN) 4 x 10/100/1000BASE-T downlink ports (LAN)           Status LED         1 x Reyee Mesh LED 1 x System Status LED           Power Supply         DC 12 V 2.5 A           Power Consumption         < 24 W           Environment         Operating temperature: -10°C to +40°C (14°F to 104°F)           Storage temperature: -40°C to +70°C (-40°F to +158°F)           Operating humidity: 20% RH to 80% RH (non-condensing)           Storage humidity: 5% RH to 95% RH (non-condensing)           Mounting         Desk mount Wall mount           Certification         CE, CB		Egypt:
Adjustable Power Granularity  Dimensions (W x D x H)  200 mm x 200 mm x 43.8 mm (7.87 in. x 7.87 in. x 1.72 in., antennas not included)  Weight  0.95 kg (2.09 lbs) (without packaging materials) 1.68 kg (3.70 lbs) (with packaging materials)  1 x 10/100/1000/2500BASE-T uplink port (WAN) 4 x 10/100/1000BASE-T downlink ports (LAN)  Status LED  1 x Reyee Mesh LED 1 x System Status LED  Power Supply  DC 12 V 2.5 A  Power Consumption  Environment  Operating temperature: -10°C to +40°C (14°F to 104°F)  Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Mounting  Mounting  Certification  CE, CB		2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm
Dimensions (W x D x H)   200 mm x 200 mm x 43.8 mm (7.87 in. x 7.87 in. x 1.72 in., antennas not included)		5150 MHz to 5350 MHz, EIRP ≤ 23 dBm
Dimensions (W x D x H)  200 mm x 200 mm x 43.8 mm (7.87 in. x 7.87 in. x 1.72 in., antennas not included)  Weight  0.95 kg (2.09 lbs) (without packaging materials) 1.68 kg (3.70 lbs) (with packaging materials)  1 x 10/100/1000/2500BASE-T uplink port (WAN) 4 x 10/100/1000BASE-T downlink ports (LAN)  1 x Reyee Mesh LED 1 x System Status LED  Power Supply  DC 12 V 2.5 A  Power Consumption  Environment  Operating temperature: -10°C to +40°C (14°F to 104°F)  Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Mounting  Mounting  Certification  CE, CB	•	0.5 dBm
included)  Weight  0.95 kg (2.09 lbs) (without packaging materials) 1.68 kg (3.70 lbs) (with packaging materials)  1 x 10/100/1000/2500BASE-T uplink port (WAN) 4 x 10/100/1000BASE-T downlink ports (LAN)  Status LED  1 x Reyee Mesh LED 1 x System Status LED  Power Supply  DC 12 V 2.5 A  Power Consumption  Environment  Operating temperature: -10°C to +40°C (14°F to 104°F)  Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Mounting  Mounting  Certification  CE, CB	Granularity	
Weight       1.68 kg (3.70 lbs) (with packaging materials)         Service Port       1 x 10/100/1000/2500BASE-T uplink port (WAN)         4 x 10/100/1000BASE-T downlink ports (LAN)         1 x Reyee Mesh LED         1 x System Status LED         Power Supply       DC 12 V 2.5 A         Power Consumption       < 24 W         Environment       Operating temperature: -10°C to +40°C (14°F to 104°F)         Storage temperature: -40°C to +70°C (-40°F to +158°F)         Operating humidity: 20% RH to 80% RH (non-condensing)         Storage humidity: 5% RH to 95% RH (non-condensing)         Mounting       Desk mount         Wall mount       CE, CB	Dimensions (W x D x H)	·
1.68 kg (3.70 lbs) (with packaging materials)  1 x 10/100/1000/2500BASE-T uplink port (WAN) 4 x 10/100/1000BASE-T downlink ports (LAN)  1 x Reyee Mesh LED 1 x System Status LED  Power Supply  DC 12 V 2.5 A  Power Consumption  Certification  1 x Reyee Mesh LED 1 x System Status LED  DC 12 V 2.5 A  Power Consumption  2 24 W  Operating temperature: -10°C to +40°C (14°F to 104°F)  Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Desk mount Wall mount  Certification  CE, CB	Maight	0.95 kg (2.09 lbs) (without packaging materials)
Service Port  4 x 10/100/1000BASE-T downlink ports (LAN)  1 x Reyee Mesh LED 1 x System Status LED  Power Supply  DC 12 V 2.5 A  Power Consumption  Environment  Operating temperature: -10°C to +40°C (14°F to 104°F)  Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Desk mount Wall mount  Certification  CE, CB	weight	1.68 kg (3.70 lbs) (with packaging materials)
Status LED  1 x Reyee Mesh LED 1 x System Status LED  Power Supply  DC 12 V 2.5 A  Power Consumption  Environment  Operating temperature: -10°C to +40°C (14°F to 104°F)  Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Desk mount Wall mount  Certification  CE, CB	Service Port	1 x 10/100/1000/2500BASE-T uplink port (WAN)
Status LED	Service Fort	4 x 10/100/1000BASE-T downlink ports (LAN)
Power Supply  DC 12 V 2.5 A  Power Consumption  Certification  DC 12 V 2.5 A  Power Consumption  Consumption	Status I ED	1 x Reyee Mesh LED
Power Consumption < 24 W  Environment Operating temperature: -10°C to +40°C (14°F to 104°F)  Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Desk mount Wall mount  Certification CE, CB	Status LED	1 x System Status LED
Certification   Operating temperature: -10°C to +40°C (14°F to 104°F)	Power Supply	DC 12 V 2.5 A
Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Desk mount Wall mount  Certification  CE, CB	Power Consumption	< 24 W
Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Desk mount Wall mount  Certification  CE, CB	Environment	Operating temperature: -10°C to +40°C (14°F to 104°F)
Storage humidity: 5% RH to 95% RH (non-condensing)  Desk mount Wall mount  Certification  CE, CB		Storage temperature: –40°C to +70°C (–40°F to +158°F)
Mounting  Desk mount  Wall mount  Certification  CE, CB		Operating humidity: 20% RH to 80% RH (non-condensing)
Mounting Wall mount Certification CE, CB		Storage humidity: 5% RH to 95% RH (non-condensing)
Wall mount  Certification  CE, CB	Manustina	Desk mount
	wounting	Wall mount
<b>MTBF</b> ≥ 30,000 hours	Certification	CE, CB
	MTBF	≥ 30,000 hours

## 1.5 Power Consumption

The router complies with the European Commission (EC) Regulation No. 1275/2008 and Regulation No. 801/2013.

- (1) Enable or disable Wi-Fi: Log in to the router's web interface, and choose **More** > **Wi-Fi-Switch** to enable or disable Wi-Fi.
- (2) Network standby power: < 8 W.
- (3) The product enters the network standby power mode immediately after data transmission stops.
- (4) You are advised to unplug the power cord if the router is not used for a long time.
- (5) For details about the router, visit <a href="https://reyee.ruijie.com/en-global/products/home-wifi/">https://reyee.ruijie.com/en-global/products/home-wifi/</a> to view the related documents.

Use only power supplies listed in the user instruction.

Power supply manufacturer: Chenzhou Frecom Electronics Co., Ltd.

Model: F30L7-120250SPACP Input: 100-240V~, 50/60Hz, 0.8A Output: 12.0V 2.5A

## 1.6 Cooling

• The RG-EW6000GX adopts a fanless design.

# **2** Preparing for Installation

## 2.1 Safety Guidelines

The RG-EW6000GX plays a vital role in connecting networks, and its proper functioning is crucial for ensuring the normal operation of all interconnected subnetworks.

The following safety guidelines must be followed during installation and use.

- Do not place the equipment in a wet position, and keep it away from liquid.
- Keep the equipment away from heat sources.
- Wear an ESD-preventive wrist strap during installation and maintenance.
- Do not wear loose clothing that may be snagged on components of the equipment. Tighten your belt, scarf, and sleeves.
- Keep tools and accessories away from walk areas.
- You are advised to use uninterruptible power supplies (UPSs), as it can prevent power outages and avoid power interference.

### 2.2 Site Requirements

The RG-EW6000GX must be installed and used indoors for normal operation and prolonged service life. The installation site must meet the following requirements.

- Temperature and humidity
- Cleanliness
- ESD prevention
- Preventing electromagnetic interference
- Installation site

### 2.2.1 Temperature and Humidity

To ensure normal operation and prolonged service life of the equipment, maintain appropriate temperature and humidity conditions in the equipment room. In an environment with high relative humidity, insulating materials are prone to poor insulation or even electricity leakage. In an environment with low relative humidity, insulating gaskets may shrink, resulting in screw loosening. In a dry environment, static electricity is more likely to occur, posing a risk to the internal circuits of equipment. A high temperature can accelerate the aging process of insulation materials, greatly reducing the availability of the equipment and severely affecting its service life. The following table describes the temperature and humidity requirements.

Operating Temperature	Operating Humidity
-10°C to +40°C (14°F to 104°F)	20% to 80%

### 2.2.2 Cleanliness

Dust poses a significant hazard to the equipment. Dust on the enclosure causes electrostatic adhesion, leading to poor contact of the metallic joints. It not only affects the service life of the equipment, but also causes communication faults. The risk of electrostatic adhesion increases when the indoor relative humidity is low.

The following table lists the requirements for dust concentration and particle size in the equipment room.

Maximum Diameter (µm)	0.5	1	3	5
Maximum Concentration (Number of Particles/m³)	1.4 x 10 <sup>7</sup>	7 x 10 <sup>5</sup>	2.4 x 10 <sup>5</sup>	1.3 x 10 <sup>5</sup>

Apart from dust, there are also requirements on the salt, acid, and sulfide in the air of the equipment room. These harmful gases will accelerate metal corrosion and component aging. Therefore, the equipment room should be properly protected against harmful gases, including SO<sub>2</sub>, H<sub>2</sub>S, NO<sub>2</sub>, NH<sub>3</sub>, and Cl<sub>2</sub>. The following table lists the limits on harmful gases.

Gas	Average (mg/m³)	Maximum (mg/m³)
Sulfur dioxide (SO2)	0.2	1.5
Hydrogen sulfide (H2S)	0.006	0.03
Nitrogen dioxide (NO2)	0.04	0.15
Ammonia gas (NH3)	0.05	0.15
Chlorine gas (CI2)	0.01	0.3

### 2.2.3 ESD Prevention

The RG-EW6000GX is designed with ESD-preventive procedures during circuit design. However, excessive static electricity can still cause damage to its circuit board. Static electricity on the communication network connected to the router mainly originates from two sources:

- Outdoor high-voltage transmission lines, lightning, and other external electric fields
- Internal systems such as indoor flooring materials and the structure of the router

To prevent damage caused by static electricity, pay attention to the following:

- Keep the site as dust free as possible.
- Maintain appropriate temperature and humidity.

### 2.2.4 Preventing Electromagnetic Interference

Interference prevention measures primarily target electromagnetic and current interferences. The following requirements should be considered to ensure effective interference prevention.

- Take interference prevention measures for the power supply system.
- Keep the equipment away from the grounding system or lightning protection grounding system of the power facility.

• Keep the equipment far away from high-frequency current equipment such as high-power radio transmitting stations and radar launchers.

### 2.2.5 Installation Site

Regardless of whether the device is installed on a desktop or wall, ensure that the following requirements are met:

- The desktop or wall surface must be smooth and clean.
- Ethernet cables are properly connected.

### 2.3 Tools

Common Tools	Phillips screwdriver, power cords, cage nuts, diagonal pliers, and cable ties
Dedicated Tools	Wire stripper, crimper, RJ45 connector crimping plier, and wire cutter
Meters	Multimeter and bit error rate tester (BERT)



### Note

The RG-EW6000GX is delivered without a toolkit. Prepare the preceding tools by yourself.

## 3 Installing the Router

### A

### Caution

Before installing the equipment, ensure that guidelines and requirements in Chapter 2 have been met.

## 3.1 Before You Begin

Carefully plan and arrange the installation location, networking, power supply, and cabling before installing the RG-EW6000GX. Ensure that the following requirements are met before installation:

- The installation site meets the temperature and humidity requirements.
- The power supply is available at the installation site, and its current meets the requirements.
- The power supply meets the requirements.
- The Ethernet cables have been deployed at the installation site.
- The installation site meets the site requirements of the equipment.
- Routers dedicated to specific users meet the specific requirements before installation.

## 3.2 Safety Precautions During Installation


To ensure the normal operation and prolonged service life of the equipment, observe the following safety precautions:

- Do not power on the equipment during installation.
- Place the equipment in a well-ventilated environment.
- Do not subject the equipment to high temperatures.
- Keep the equipment away from high-voltage power cables.
- Install the equipment indoors.
- Do not expose the router to a thunderstorm or strong electric field.
- Keep the router clean and dust-free.
- Cut off the power supply before cleaning the router.
- Do not wipe the equipment with a damp cloth.
- Do not wash the equipment with liquid.
- Do not open the enclosure when the equipment is working.
- Secure the equipment properly.

### 3.3 Installation Guide

The router is typically placed on a horizontal surface, such as on a shelf or desktop. The device can also be mounted on the wall as shown in the following figure.







Note

The diameter of the screw head ranges from 5 mm (0.2 in.) to 8 mm (0.31 in.), the screw head thickness is less than 2 mm (0.08 in.), and the distance of two screws is 100 mm (3.94 in.). The screw that projects from the wall needs to be around 5 mm (0.2 in.), and the length of the screw needs to be at least 20 mm (0.79 in.) to withstand the weight of the product.

## 3.4 Bundling Cables

### **Precautions**

- Bundle cables in an esthetically pleasing way.
- Ensure that the twisted pairs have natural bends or bends of large radius at the connectors.
- Do not overtighten the cable bundle as it may reduce the cable life and performance.

### **Bundling Steps**

- (1) Bundle the hanging part of the twisted pairs using cable ties and lead them to the WAN/PoE port end of the router by convenience.
- (2) Fasten the twisted pairs to the cable trough of the mounting bracket.
- (3) Extend the twisted pairs under the router and route them in a straight line.

## 3.5 Verifying Installation

- Verify that the router is securely fastened.
- Make sure that the twisted pairs match the port type.
- Verify that cables are properly bundled.

# 4 Commissioning

## 4.1 Setting Up the Configuration Environment

Verify that the power cord is properly connected and compliant with safety requirements before setting up the environment.

### 4.2 Powering-on

### 4.2.1 Checklist Before Power-on

- The power cord is reliably connected.
- The input voltage meets the requirement.

### 4.2.2 Checklist After Power-on

- The LED status is normal.
- After the router is powered on, the SSID can be detected by a mobile phone or other wireless clients.

## 4.3 Rectifying Power Supply Failures

You can determine whether there is a power system failure by checking the LED status on the front panel of the RG-EW6000GX. For details about the working status of the LEDs, see <u>1.3.2 Ports and LEDs</u>. Perform the following checks if the power supply is not functioning properly.

- Check whether the router is properly powered.
- Check whether the Ethernet cable is properly connected.

### Note

If the router cannot start after all the preceding items are verified, contact your local distributor or technical support.

# **5** Monitoring and Maintenance

## 5.1 Monitoring


You can observe the LEDs to monitor the RG-EW6000GX in operation.

## 5.2 Hardware Maintenance

If the hardware is faulty, please contact the Ruijie technical support.

# 6 Common Troubleshooting

## 6.1 Troubleshooting Flowchart

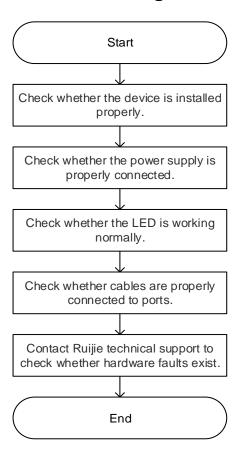

### 6.2 Common Faults

What do I do if I cannot log in to the router's web interface (192.168.110.1)?

- (1) Ensure that the PC's NIC is set to **Obtain an IP address automatically**.
- (2) Ensure that the PC is connected to one of the LAN ports on the router, and that the port status LED is on. If the port status LED is not on, replace the Ethernet cable.
- (3) Close and re-open your browser (Google Chrome is recommended), and enter 192.168.110.1 in the address bar to try again.
- (4) Use another web browser.
- (5) Use another Ethernet cable or PC.

If the fault persists, restore the router to factory defaults by pressing the Reset button for 10 seconds.

### What can I do if I cannot access the Internet?

- (1) Ensure that the Ethernet cable is properly connected, and that the port status LED is on.
- (2) Choose Internet on the router's web interface to check the Internet connection type.

- (3) If your ISP provides a broadband account and password, select **PPPoE** and enter the account and password. If your ISP provides IP address, subnet mask, gateway, and DNS server, then select Static IP and enter mandatory parameters.
- (4) If the fault persists, contact your ISP.

### What can I do if I forget the admin password?

Try to enter the Wi-Fi password. If the password is still incorrect, restore the router to factory defaults.

### How do I restore the router to factory defaults?

Use a pin to press and hold the Reset button for 10 seconds until the status LED starts blinking, then release the button. After the status LED turns solid on, the router is restored to factory defaults successfully, and you can connect to the router's Wi-Fi network (@Ruijie-sXXXX).

## **7** Appendix

## 7.1 Appendix A Connectors and Media

### 10/100/1000BASE-T Port

7TP3+ ←

8TP3- ←

The 10/100/1000BASE-T port is a 10/100/1000 Mbps auto-negotiation port that supports automatic MDI/MDIX Crossover.

Compliant with IEEE 802.3ab, the 1000BASE-T port requires a 100-ohm Category 5e Unshielded Twisted Pair (UTP) or recommended Shielded Twisted Pair (STP) with a maximum distance of 100 meters (328.08 feet).

The 1000BASE-T port requires all four pairs of wires to be connected for data transmission. The following figure shows twisted pair connections for the 1000BASE-T port.

Straight-Through Crossover Switch Switch Switch Switch 1TP0+ ← → 1TP0+ 1TP0+← **→**1TP0+ → 2TP0-2TP0- ← **>**2TP0-3TP1+ ← → 3TP1+ 3TP1+ ← >3TP1+ → 6TP1-6TP1- ← →6TP1-→ 4TP2+ 4TP2+ ← 4TP2+ ← →4TP2+ 5TP2- ← >5TP2-5TP2- ← → 5TP2-

Figure 7-1 1000BASE-T Twisted Pair Connections

The 100BASE-TX/10BASE-T port can also be connected by cables of the preceding specifications. Besides, the 10BASE-T port can be connected by 100-ohm Category 3, Category 4, and Category 5 cables with a maximum distance of 100 meters (328.08 feet). 100BASE-TX port can be connected by 100-ohm Category 5 cables with a maximum distance of 100 meters (328.08 feet). The following figure lists definitions of pin signals for the 100BASE-TX/10BASE-T port.

7TP3+←

8TP3- ←

>7TP3+

→8TP3-

Figure 7-2 100BASE-TX/10BASE-T Pin Assignments

→ 7TP3+

→ 8TP3-

Pin	Socket	Plug	
1	Input Receive Data+	Output Transmit Data+	
2	Input Receive Data-	Output Transmit Data-	
3	Output Transmit Data+	Input Receive Data+	
6	Output Transmit Data-	Input Receive Data-	
4,5,7,8	Not used	Not used	

The following figure shows feasible connections of the straight-through and crossover twisted pairs for a 100BASE-TX/10BASE-T port.

Figure 7-3 100BASE-TX/10BASE-T Twisted Pair Connections

Straight-	Through	Crossover	
Switch	Adapter	Switch	Switch
1 IRD+ ←	→ 1 OTD+	1 IRD+ ←	→ 1 IRD+
2 IRD- ←	→ 2 OTD-	2 IRD- ←	2 IRD-
3 OTD+ <b>←</b>	→ 3 IRD+	3 OTD+ <b>←</b>	→ 3 OTD+
6 OTD- ←	→ 6 IRD-	6 OTD- ←	→ 6 OTD-