

UDS045

Laptop Docking Station 3 Monitors
Quick Start Guide



TOBENONE

THANK YOU!

Thank you for choosing the TobenONE Laptop Docking Station! Enhance your workspace with our all-in-one dock, enabling you to link triple displays through 2 HDMI and 1 DP or 1 USB C video port, connect 8 USB devices, utilize high-speed SD/TF 4.0 card slots, enjoy swift 2.5Gbps Ethernet, and integrate audio with a 3.5mm jack-all through a USB-C connection to your laptop.

If you find the font size in our manual too small, please contact our customer service at support@tobenone.com with your product model, and we will send you a digital version of the manual for your convenience. Scan the QR Code to Receive a 2-Year Warranty



Simplicity Power Elegance

1

Resolution Guide for Windows Laptop

System	Status	Mode		Port	Resolution
Windows (DP1.4/support DSC/MST)	Single monitor	Extend	AB	DP(USB C)	8K/30Hz or 4K/144Hz
				HDMI 1	8K/30Hz or 4K/144Hz
				HDMI 2	8K/30Hz or 4K/144Hz
	Dual monitor	Extend	ABC	HDMI 1 DP(USB-C)	4K/60Hz 4K/60Hz
				HDMI 2 DP(USB-C)	4K/60Hz 4K/60Hz
	Triple monitor	Extend	ABCD	HDMI 1 HDMI 2 DP(USB C)	4K/60Hz 4K/60Hz 4K/30Hz
Windows (DP1.4/not support DSC/MST)	Single monitor	Extend	AB	DP(USB C)	8K/30Hz or 4K/144Hz
				HDMI 1	8K/30Hz or 4K/144Hz
				HDMI 2	8K/30Hz or 4K/144Hz
	Dual monitor	Extend	ABC	HDMI 1 DP(USB-C)	4K/30Hz 1080P/60Hz
				HDMI 2 DP(USB-C)	4K/30Hz 1080P/60Hz
	Triple monitor	Extend	ABCD	HDMI 1 HDMI 2	4K/30Hz 1080P/60Hz
Windows (DP1.2/MST)	Single monitor	Extend	AB	DP(USB C)	4K/30Hz
				HDMI 1	4K/30Hz
				HDMI 2	4K/30Hz
	Dual monitor	Extend	ABC	HDMI 1 DP(USB-C)	1080P/60Hz
				HDMI 2 DP(USB-C)	1080P/60Hz
				HDMI 1 HDMI 2	1080P/60Hz

A means your laptop

2

Please note that:

1.A laptop that has a full featured USB-C / USB4 / Thunderbolt 4/3 port that is running Windows 10 or 11, ChromeOS version 100+ should be compatible with the UDS045. Laptops that do not meet these requirements are not supported.


2.Mac systems do not support MST and are not recommended with the UDS045. Please note that Apple laptops do not support dual-screen expansion through this dock.

3. The USB-C port (Port ④) of the dock can support display output. The USB-C port and the DP port are in an either-or mode, with DP output taking precedence.

4. Monitors that include an HDMI / DP / USB C input port are compatible with UDS045. To achieve high resolution, it is necessary that your laptop's USB-C port, the cable connecting the dock and the laptop, and the monitor all support the desired resolution you wish to attain. For detailed information, please refer to our resolution table.

3

Ports And connectors

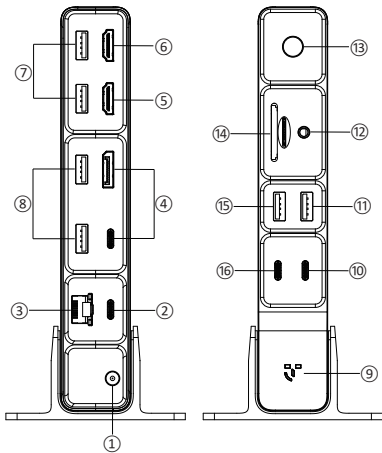

4

- ① DC Port: Connect the included power adapter
- ② To Laptop Port: Connect to the laptop
- ③ 2.5Gbps Ethernet: Speed up to 2.5Gbps
- ④ DP or USB C Port: resolution up to 8K/30Hz or 4K/144Hz for single display(only choose one)
- ⑤ HDMI2 Port: resolution up to 8K/30Hz or 4K/144Hz for single display
- ⑥ HDMI1 Port: resolution up to 8K/30Hz or 4K/144Hz for single display
- ⑦ USB A 2.0: Support data transfer 480Mbps
- ⑧ USB A 3.0: Support data transfer 5Gbps
- ⑨ LED indicator light
- ⑩ USB C 3.0: Support data transfer 5Gbps
- ⑪ USB A 3.0: Support data transfer 5Gbps
- ⑫ 3.5mm Audio: Support mic & audio-out
- ⑬ Product control switch
- ⑭ SD4.0/microSD 4.0 Slot: Support SDµ SD work simultaneously
- ⑮ USB A 3.1: Support data transfer 10Gbps
- ⑯ USB C 3.1: Support data transfer 10Gbps

5

Connection method

- Step 1:** Connect the power adapter to the dock's DC port (①)
- Step 2:** Use the USB C cable coming with the dock to connect the dock and laptop via To Laptop port (②)
- Step 3:** Connect monitor via HDMI 1 port (⑥) or HDMI 2 port (⑤) or DP/USB C port (④)
- Step 4:** Attach USB-C devices to the USB-C ports (⑩) (⑯). And attach USB A devices(USB driver, keyboard, mouse, printer, etc) to the USB A ports (⑦) (⑧) (⑨) (⑮)
- Step 5:** Connect the speaker, headphones, or microphone to the audio port (⑫), And connect the ethernet cable to the ethernet port (③)
- Step 6:** Turn on the power button (⑬) Press and hold for three seconds

6



Any Questions, We Are Here To Help!

Email: support@tobenone.com

The Only Question We can't Fix Is The One We Don't Know