



# SATECHI Slim X3 Bluetooth Backlit Keyboard User Manual

[Home](#) » [SATECHI](#) » SATECHI Slim X3 Bluetooth Backlit Keyboard User Manual 

## Contents

- 1 SATECHI Slim X3 Bluetooth Backlit Keyboard
- 2 Safety Instructions
- 3 FUNCTIONS
- 4 ON/ OFF
- 5 PAIRING YOUR DEVICES
- 6 LED INDICATORS
- 7 BACKLIGHT
- 8 CHARGING YOUR KEYBOARD
- 9 WIRED MODE
- 10 HOT KEY FUNCTION & SUPPORT TABLE
- 11 FCC STATEMENT
- 12 CE DECLARATION OF CONFORMITY
- 13 NEED HELP?
- 14 FAQS Frequently Ask & Question
  - 14.1 Can I use this as a wired keyboard?
  - 14.2 How do I pair with Windows 10?
  - 14.3 Does the keyboard come with different color light options?
  - 14.4 How long does the battery last on a full charge?
  - 14.5 Why did my keyboard backlight dim/turn off automatically?
- 15 Documents / Resources
  - 15.1 References
- 16 Related Posts

**SATECHI Slim X3 Bluetooth Backlit Keyboard**




## USER MANUAL

### Safety Instructions

**Warning:** Fire, electric shock, damage to keyboard device could occur if the following instructions are not obeyed

1. Keep away from microwave radiation source
2. Do not place heavy objects on this product
3. No dropping and bending
4. Keep away from oil, chemical, or organic solvents

### FUNCTIONS

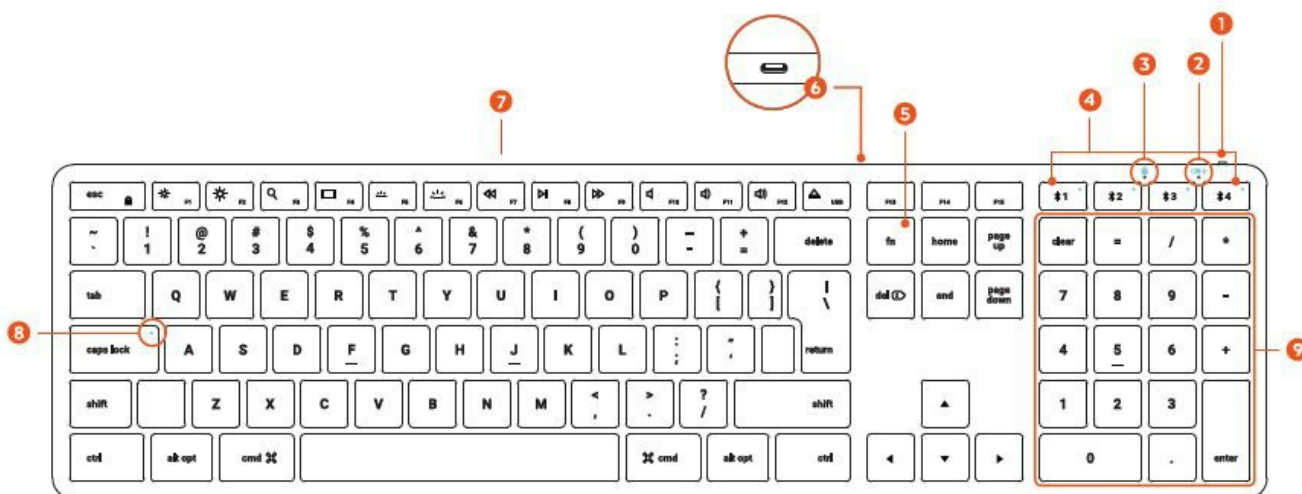

**Note:** The keyboard layout function is based on iOS and macOS default settings. The output might differ for different OS.

1. ON/OFF Switch
2. Power/Charging LED Indicator
3. FN Lock LED Indicator
4. Bluetooth Device Keys with LED Indicator
5. FN Key
6. USB-C Charging Port
7. Media / Function Keys
8. Caps Lock LED Indicator
9. Numberpad

## ON/ OFF



To turn the keyboard on, move the switch on the top of the device to the on position. The power indicator turns green for 3 seconds. and then turns off.

## PAIRING YOUR DEVICES

1. Press and hold one of Bluetooth keys for 3 seconds to assign a device to it. White LED Light should start blinking.



2. On the host device, look for “Slim X3 Keyboard • in the Bluetooth setting, choose “Connect” to pair. The white LED will stop blinking, indicating a successful pairing. Repeat process to add up to 4 Bluetooth devices





## Note:

1. After 30 minutes non-operation, the keyboard will go to sleep mode. Please press any key to wake up.
2. Quickly switch between **#1, #2, #3 and #4** to switch devices.

3. For buttons F1 ~ F15 press  +  to enable the functions.

## LED INDICATORS

- **On/Off** – turns green for 4s and turns off.
- **Low Battery** – flashes green when it's low battery.
- **Charging** – turns red when it's charging.
- **Fully Charged** – turns green and stays green.

- Press  +  to swap between Media keys and F-Keys. The white LED light gets brighter indicating Fn lock is enabled.



POWER / CHARGING LED INDICATOR  
VOYANT LED D'ALIMENTATION / CHARGE


## BACKLIGHT

There are 10 backlight levels. You can change the backlight levels at any time by pressing



**Note:** Backlight runs off when battery is low. Backlight will dim after 1 min. of inactivity and it will turn off after 3 min. inactivity. Click any key to wake keyboard.


## CHARGING YOUR KEYBOARD

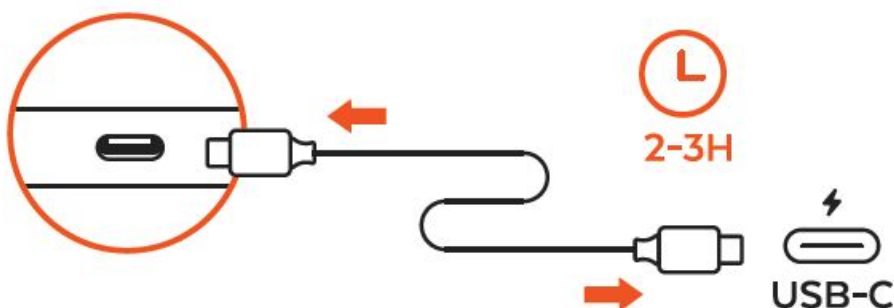

1. When the battery is low, the power indicator will flash green. Connect the keyboard to a computer or USB-C wall adapter using the included USB-C charging cable

2. Charge the keyboard for 2 to 3 hours, or until the red charging LED light turns green. The keyboard can be used either wired or wirelessly while charging



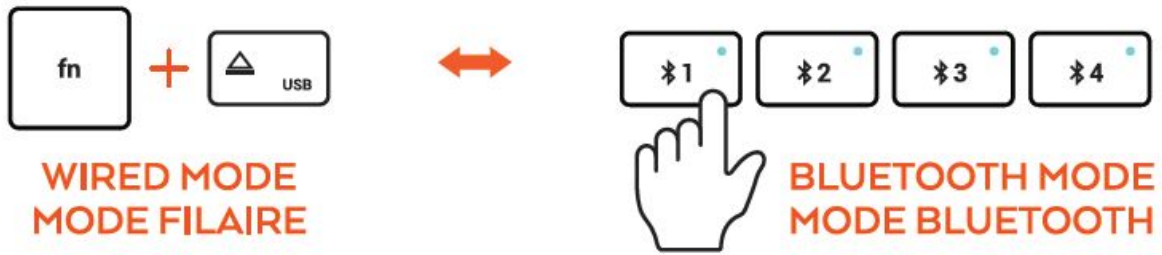












## WIRED MODE



Press  $\text{Fn} + \frac{\triangle}{\text{USB}}$  to activate the wiredmode when USB-C cable is connected. The power LED light turns green.

Press  $\text{1} \sim 4$  button to switch back to Bluetooth mode.

## HOT KEY FUNCTION & SUPPORT TABLE

SYMBOL	macOS FUNCTION	iOS FUNCTION
	Decrease Display Brightness	Decrease Brightness
	Increase Display Brightness	Increase Brightness
	Spotlight Search	Spotlight Search
	App Switcher	App Switcher (iPad only)
	Decrease Keyboard Backlight	Decrease Keyboard Backlight
	Increase Keyboard Backlight	Increase Keyboard Backlight
	Previous Track	Previous Track
	Play/ Pause	Play/ Pause
	Next Track	Next Track
	Mute	Mute
	Volume Down	Volume Down
	Volume Up	Volume Up
	Eject	Activate Virtual Keyboard
	Fn Lock	Fn Lock
	Clear	Clear

## FCC STATEMENT

This device complies with part 15 of the FCC results.  
Operation is subject to the following two conditions:

1. This device may not cause harmful interference and

2. This device must accept any interference received, including interference that may cause undesired operation.

**Note:** This Equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the Federal Communications Commission (FCC) rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- 1.1. Reorient or relocate the receiving antenna
  - 1.2. Increase the separation between the equipment and receiver
  - 1.3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
  - 1.4. Consult the dealer or an experienced radio/TV technician for help
- Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

## CE DECLARATION OF CONFORMITY

Satechi declares that this product is in compliance with the essential requirements and other relevant provisions of applicable EC directives. For Europe, a copy of the Declaration of Conformity for this product may be obtained by visiting <https://satechi.net/support/doc>

## IC: 24917-STBTSX

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device

## NEED HELP?

+18582681800

[asupport@satechi.com](mailto:asupport@satechi.com)

7365 Mission Gorge Rd. Ste. G

San Diego, CA 92120, USA

[www.satechi.net](http://www.satechi.net)

---

## FAQS Frequently Ask & Question

**Can I use this as a wired keyboard?**

A: Yes, the Slim X3 Keyboard includes USB wired connectivity. Pressing the "FN + EJECT" keys will activate the USB wired mode for the keyboard.

### How do I pair with Windows 10?

A: You need to pair through Control Panel and not Bluetooth Settings.

### Does the keyboard come with different color light options?

A: Unfortunately, the keyboard is only equipped with a white backlight. However, you are able to cycle through 10 different brightness options.

### How long does the battery last on a full charge?


A: The battery life of the keyboard can vary depending on the level of the backlight brightness but the longest the keyboard can last on a full charge is approximately 80 hours.

### Why did my keyboard backlight dim/turn off automatically?

A: The backlight will automatically dim after one minute of non-usage. It will also turn off automatically once it reaches low-power mode. (Green flashing LED =Low-Power Mode).

---

## Documents / Resources

	<a href="#">SATECHI Slim X3 Bluetooth Backlit Keyboard</a> [pdf] User Manual Slim X3 Bluetooth Backlit Keyboard, Slim X3, Bluetooth Backlit Keyboard, Backlit Keyboard, Keyboard
---	---

## References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.