

How to reset the current configuration to factory default

Contents

- [1 How to reset the current configuration to factory default](#)
- [2 Method 1](#)
- [3 Method 1](#)
- [4 DOWNLOAD](#)
- [5 Related Posts](#)

How to reset the current configuration to factory default

It is suitable for: **N150RA, N300R Plus, N300RA, N300RB, N300RG, N301RA, N302R Plus, N303RB, N303RBU, N303RT Plus, N500RD, N500RDG, N505RDU, N600RD, A1004, A2004NS, A5004NS, A6004NS**

Application introduction: If you can't access the router's setup interface or simply forgot the router's password, you may reset the current configuration to factory default. There are two ways to.

Method 1

STEP-1: Connect your computer to the router

1-1. Connect your computer to the router by cable or wireless, then login the router by entering `http://192.168.1.1` into the address bar of your browser.




Note: The default IP address of TOTOLINK router is 192.168.1.1, the default Subnet Mask is 255.255.255.0. If you can't log in, Please restore factory settings.

1-2. Please click **Setup Tool** icon  to enter the router's setting interface.




1-3. Please login to the Web Setup interface (the default user name and password is **admin**).

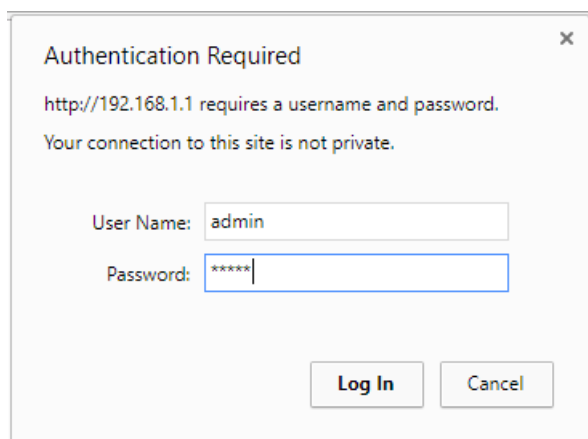


STEP-2:

Click **Advanced Setup->System->Config Backup/ Restore** on the navigation bar on the left.

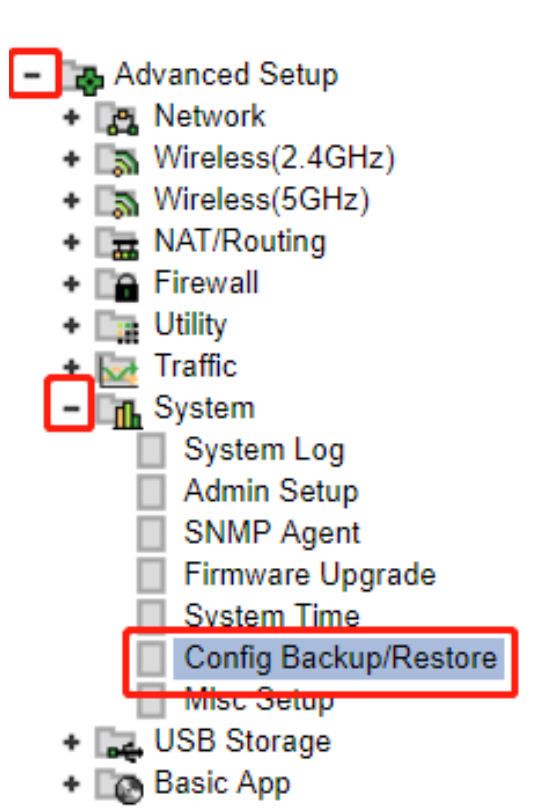

STEP-3:

Click Factory Default to reset the router's configuration.

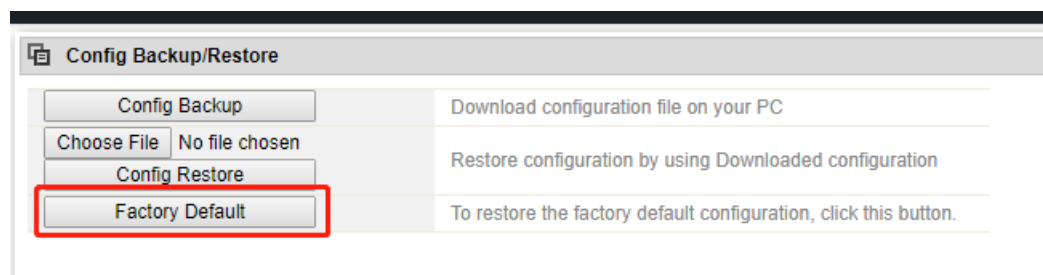

STEP-4:

Click OK and wait for few seconds to finish resetting.

Method 1

Only by one click on the RST/WPS button

STEP-1:

Press and hold the RST/WPS button for about 10 seconds, until the CPU led blink quickly.

STEP-2:

After nearly 30 seconds, resetting is finished.

DOWNLOAD

How to reset the current configuration to factory default – [[Download PDF](#)]
