

 **tp-link**
DS105GP
Switch



tp-link DS105GP Switch Owner's Manual

[Home](#) » [tp-link](#) » tp-link DS105GP Switch Owner's Manual 

Contents

- [1 tp-link DS105GP Switch](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 LED Explanation](#)
- [5 Connection](#)
- [6 Specifications](#)
- [7 Safety Information](#)
- [8 FAQ](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)
- [10 Related Posts](#)



tp-link DS105GP Switch



Product Information

Specifications:

- **Product Name:** Switch
- **Model Numbers:**
 - T120100-2B1 (For various models)
 - T535081-2B4 (For LS105LP/ LS106LP)
 - T535081-2-DT (For TL-SF1005LP/ TL-SF1008LP/ TL-SG1005LP)
- **Power Adapter Model Numbers:**
 - T535131-2-DT (For various models)
 - T535243-2-DT (For various models)
 - T535337-2-DT (For SG2210XMP-M2)
- **Responsible Party:** TP-Link USA Corporation
- **Website:** <https://www.tp-link.com/us/>
- **Contact Tel:** +1 626 333 0234
- **Contact Fax:** +1 909 527 6804
- **Contact E-mail:** sales.usa@tp-link.com

Regulatory Compliance:

This device complies with part 15 of the FCC Rules. Operation is subject to certain conditions as outlined in the user manual.

CE Mark Warning:

Class A product that may cause radio interference in a domestic environment. User may need to take adequate measures.

UKCA Mark Warning:

Class A product that may cause radio interference in a domestic environment. User may be required to take adequate measures.

Product Usage Instructions

Installation:

1. Ensure the power adapter is connected to the appropriate power source.
2. Connect the switch to the power adapter using the provided cables.
3. Connect your devices to the switch using Ethernet cables.
4. Power on the switch and connected devices.

Configuration:

Access the switch's configuration interface through a web browser by entering the switch's IP address. Refer to the user manual for specific configuration settings.

Troubleshooting:

If you encounter any issues with the switch, refer to the troubleshooting section of the user manual or contact customer support for assistance.

LED Explanation

Power

- **On:** Power on

PoE MAX

- **DS105GP/DS108GP**


On: $58\text{ W} \leq \text{Total power supply} < 65\text{ W}$ **Flashing:** Total power supply $\geq 65\text{ W}$ **Off:** Total power supply $< 58\text{ W}$

- **DS106GPP**

On: $57\text{ W} \leq \text{Total power supply} < 64\text{ W}$ **Flashing:** Total power supply $\geq 64\text{ W}$ **Off:** Total power supply $< 57\text{ W}$

Link/Act and PoE Status

- **On (Green):** Connected to a 1000 Mbps device
- **On (Yellow):** Connected to a 10/100 Mbps device
- **Flashing:** Transmitting/receiving data **Off:** No device is connected to the corresponding port.
- **On:** Providing PoE power
- **Flashing:** Current-overload/Short-circuit **Off:** Not providing PoE power

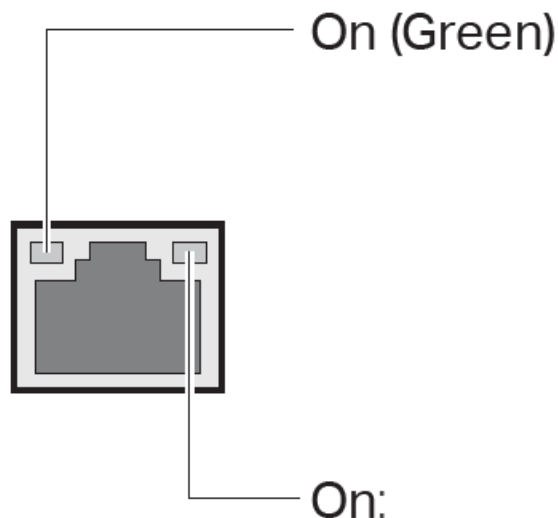

Switches Explanation

Note: The port numbers in brackets indicate the ports where the feature takes effect. For example, when Extend (Port 1-2) is toggled to On, the Extend mode will be enabled for ports 1-2.

Extend:

- **Off:** The corresponding ports run at 10/100/1000 Mbps and support PoE power supply up to 100 m away.
- **On:** The corresponding ports run at 10 Mbps and support PoE power supply up to 250 m away.


Recovery

- **Off:** The PoE Auto Recovery function is disabled.

- **On:** The switch will constantly detect the working status of a PoE powered device (PD). When the switch finds that the PD works abnormally, the switch will reboot it.

Note: For simplicity, we will take DS105GP for example throughout this Guide.

Connection

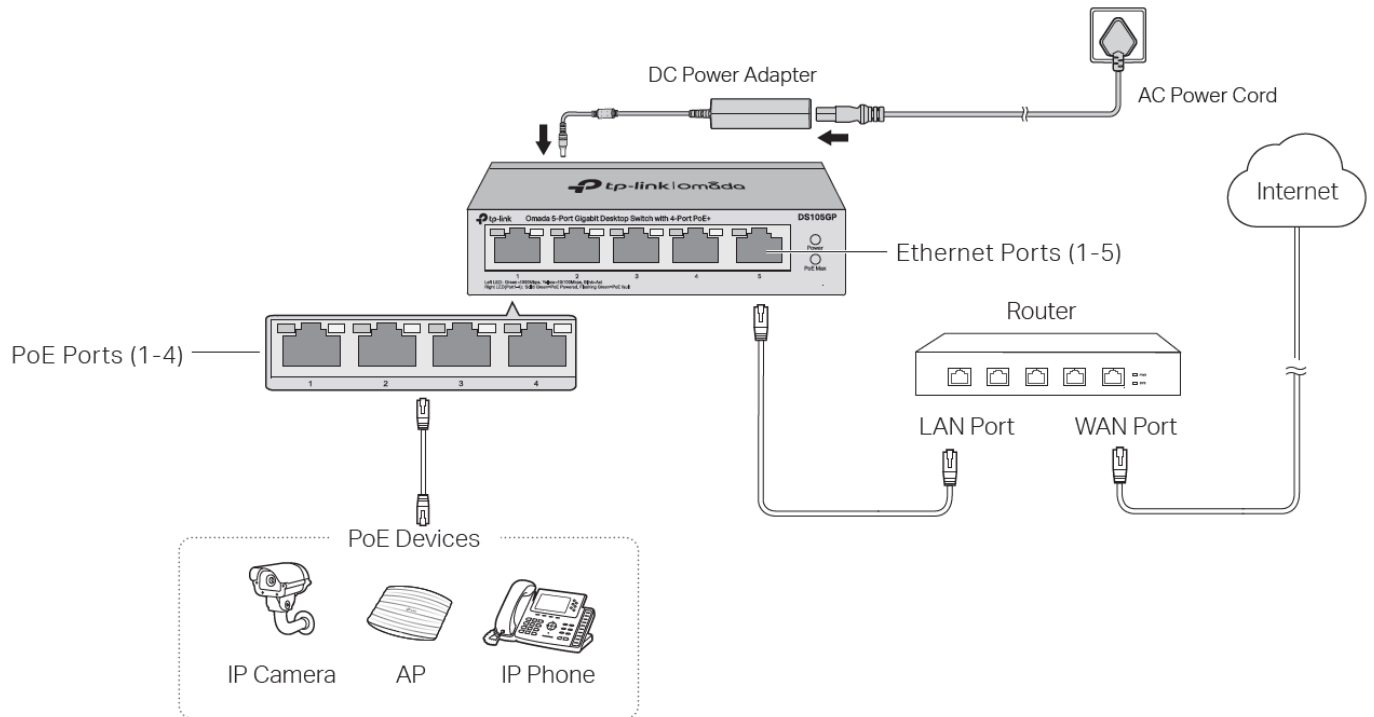

Note:

1. PoE ports can also connect to non-PoE devices, but only transmit data.
2. DS105GP/DS108GP can supply up to 30 W for each PoE port and 65 W for all PoE ports.
3. DS106GPP can supply up to 60 W for port 1, 30W for other single PoE port, and 64 W for all PoE ports.

Specifications

General Specifications

Standard	IEEE 802.3i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x, IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt (for DS106GPP only), IEEE 802.1p
Interface	DS105GP: 5 10/100/1000 Mbps RJ45 Ports Auto-Negotiation MDI/MDIX PoE Ports: Port 1-Port 4 DS106GPP: 6 10/100/1000 Mbps RJ45 Ports Auto-Negotiation MDI/MDIX PoE Ports: Port 1-Port 4 DS108GP: 8 10/100/1000 Mbps RJ45 Ports Auto-Negotiation MDI/MDIX PoE Ports: Port 1-Port 8 Total Power Supply: 65 W (DS105GP/DS108GP)/64W (DS106GPP)
Network Media (Cable)	10BASE-T: UTP category 3, 4, 5 cable (maximum 100 m); EIA/TIA-568 100Ω STP (maximum 100 m) 100BASE-TX: UTP category 5, 5e cable (maximum 100 m); EIA/TIA-568 100Ω STP (maximum 100 m) 1000BASE-T: UTP category 5e cable or above (maximum 100 m); EIA/TIA-568 100Ω STP (maximum 100 m)
Switching Capacity	DS105GP: 10 Gbps DS106GPP: 12 Gbps DS108GP: 16 Gbps
Transfer Method	Store-and-Forward
MAC Address Learning	Automatically learning, automatically aging
Power Supply	External Power Adapter Input: 100-240 VAC, 50/60 Hz Output: 53.5 VDC /1.31 A
Wall Mountable	Yes
Distance Between Mounting Holes	DS105GP: 39 mm DS106GPP/DS108GP: 94mm

Environmental and Physical Specifications

- **Operating Temperature** 0 °C to 40 °C (32 °F to 104 °F)
- **Storage Temperature** -40 °C to 70 °C (-40 °F to 158 °F)
- **Operating Humidity** 10% to 90%RH non-condensing
- **Storage Humidity** 5% to 90%RH non-condensing

1. To ask questions, find answers, and communicate with TP-Link users or engineers, please visit <https://community.tp-link.com> to join TP-Link Community.
2. For technical support and other information, please visit <https://www.tp-link.com/support>, or simply scan the QR code.



- **EU declaration of conformity**

- TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2014/35/EU, 2011/65/EU and (EU)2015/863.
- The original EU Declaration of conformity may be found at <https://www.tp-link.com/en/support/ce/>

- **UK declaration of conformity**

- TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of the Electromagnetic Compatibility Regulations 2016 and Electrical Equipment (Safety) Regulations 2016.
- The original UK Declaration of conformity may be found at <https://www.tp-link.com/support/ukca>

Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Place the device with its bottom surface downward.
- Do not use damaged charger or USB cable to charge the device.
- Do not use any other chargers than those recommended.
- Adapter shall be installed near the equipment and shall be easily accessible.
- The plug on the power supply cord is used as the disconnect device, the socket-outlet shall be easily accessible.
- The socket-outlet shall be installed near the equipment and shall be easily accessible.
- Plug the product into the wall outlets with earthing connection through the power supply cord.
- The PoE ports shall not be used to charge lithium batteries or devices supplied by lithium batteries.

FAQ

Q1. Why is the Power LED not lit?

The Power LED should be lit when the power system is working normally. If the Power LED is not lit, please try the following:

1. Make sure the AC power cord is connected to the switch with power source properly.
2. Make sure the voltage of the power supply meets the requirements of the input voltage of the switch.
3. Make sure the power source is on.

Q2. Why is the Link/Act LED not lit while a device is connected to the corresponding port?

It is recommended that you check the following items:

1. Make sure that the cable connectors are firmly plugged into the switch and the device. A2: Make sure the connected device is turned on and works normally.
2. The cable must be less than 100 meters long (328 feet). If Extend Mode is enabled, it should be less than 250 meters (820 feet).


Q3. Why are PoE ports not supplying power for PoE devices?

When the total power consumption of connected PoE devices exceeds the maximum, the PoE port with a smaller port number has higher priority. The system will cut off power to the ports with larger port numbers to ensure supplying to other ports. Take DS105GP as an example. If port 1, 2 and 4 are consuming 15.4 W respectively, and an additional PoE device with 19 W is connected to port 3, the system will cut off the power of port 4 to compensate for the overload.

Q4. What should I notice before using the PoE Auto Recovery feature?

1. Before upgrading a connected PoE powered device (PD), disable PoE Auto Recovery to avoid the PD's damage.
2. When a PD does not send data packets to the switch for a long period in certain scenarios (e.g. an IPC in sleep mode), disable PoE Auto Recovery to avoid the PD repeatedly rebooting.

Documents / Resources

 Regulatory Compliance Switch	tp-link DS105GP Switch [pdf] Owner's Manual DS105GP, DS106GPP, DS106P, DS108GP, DS110GMP, DS111P, DS116GE, LS105GP, LS105LP, LS106LP, LS108GP, LS109P, LS1210GP, TL-SF1005LP, TL-SF1005P, TLSF1006P, TL-SF1008LP, TL-SF1008P, TL-SF1009P, TL-SG1005LP, TL-SG1005P, TL-SG1006PP, TL-SG1008P, TL-SG105MPE, TL-SG105PE, TL-SG105PP-M2, TL-SG108PE, TL-SG116, TL-SG116E, TL-SG116P, TL-SG1210MP, TL-SG1210MPE, TL-SG, DS105GP Switch, DS105GP, Switch
--	--

References

- [👉 Link: Pay quickly, shop confidently](#)
- [🔗 CE Regulatory Compliance | TP-Link](#)
- [🔗 TP-Link Product Support - Wireless Networking Equipment Support](#)
- [🔗 Regulatory Compliance | TP-Link](#)
- [🔗 WiFi Networking Equipment for Home & Business | TP-Link](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.