



ALARM COM Smart WiFi Gateway Installation Guide

[Home](#) » [ALARM COM](#) » ALARM COM Smart WiFi Gateway Installation Guide 

ALARM COM Smart WiFi Gateway Installation Guide



**Smart
Home**



Smart WiFi Gateway Installation Guide

[Installation Support](#)

(877) 998-1457

AAA.com/SmartHome-Install

ADC-SG130

AAA.com/SmartHome-Install


The Smart Gateway provides a dedicated Wi-Fi network for the Wi-Fi video cameras in your system. Featuring WPS, you no longer need to update cameras with complicated router passwords. Simply add to your online account, plug into any wall outlet, connect to the existing router, and pair with a Wi-Fi camera for instant, secure Wi-Fi connectivity.



Contents

- [1 Pre-installation checklist](#)
- [2 Add the Smart Gateway to your online account](#)
- [3 Wi-Fi Protected Setup \(WPS\) mode](#)
- [4 LED reference guide](#)
- [5 Troubleshooting](#)
- [6 Notices](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

Pre-installation checklist

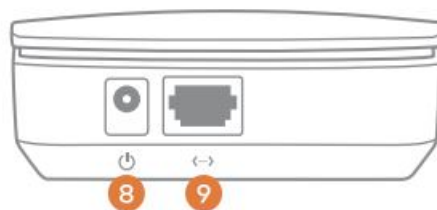

1. Power LED
2. Data LED
3. Communication
4. LED Wi-Fi LED
5. Reset Button (Pinhole)
6. WPS Button
7. Function Button
8. Power Input
9. Ethernet Port (RJ-45)

- ADC-SG130 Smart Gateway (included)

- Ethernet cable (included)
- 12 VDC power adapter (included)
- Router with broadband (Cable, DSL, or Fiber Optic) Internet connection and an open Ethernet port
- A computer, tablet, or smartphone with an Internet connection
- Login and Password for your online account to which you will add the Smart Gateway

Add the Smart Gateway to your online account

1. Use an Ethernet cable to connect the Smart Gateway to an open Ethernet (RJ-45) port on the existing router.
2. Connect the Smart Gateway's DC power adapter and plug it in to a non-switched outlet.

NOTE: For optimal Wi-Fi performance, place the Smart Gateway on top of a table or in another location free from physical obstructions.

3. Add the device to the account by using a web browser and entering the following URL:
www.alarm.com/addcamera. Type in the Smart Gateway's MAC address to begin. The MAC address is included on the label on the back of the device.

Wi-Fi Protected Setup (WPS) mode

- WPS mode is the preferred way to add a compatible Wi-Fi camera to the Smart Gateway's Wi-Fi network.
- Be sure to add the Smart Gateway to an Alarm.com account before using WPS mode to add video cameras to the Wi-Fi network.
- To enter WPS mode, press and hold the WPS button for approximately 1 to 3 seconds. The Wi-Fi LED will slowly flash to indicate that the device is in WPS mode.

LED reference guide



Power

On
Device powered on

Off
Device powered off

Flashing
Device booting



Data

On/Flashing
Device transferring/receiving data over Ethernet.
 Off No data is being transferred over Ethernet. Please check the Ethernet connection between the Smart Gateway and the router.



Communication

On
Connected to Internet

Off

No local or Internet connection. See troubleshooting section

Flashing(slowly)

Local connection, no Internet

Flashing (5 quick blinks)

Communication test initiated



Wi-Fi

On Active

Off Inactive

Flashing WPS mode

Additional States

All LEDs Flashing (escalating) Firmware Upgrade in progress

All LEDs Flashing (simultaneously) Reset in progress

Troubleshooting

If you are still having issues using the Smart Gateway, please try the following troubleshooting options:

Check your router's connection to the Internet

If you cannot access the Internet using your router, please contact your Internet Service Provider to restore Internet access. Try adding the device again.

Perform a communication test

Press the Reset button (pinhole) for 1 to 3 seconds (use a paper clip or tool if necessary). The Communication LED will quickly flash five times to indicate that the test was sent. Please wait two minutes before trying to use the device again.

Power cycle

Unplug the device from power for 10 seconds and plug it back in. Wait for the Power and Communication LEDs to become solid before trying to use the device again.

Reset

Press and hold the Reset button (pinhole) for 15 to 20 seconds (use a paper clip or tool if necessary). All LEDs will flash simultaneously to indicate that the device will reset. Wait for the Power and Communication LEDs to become solid before trying to use the device again.

Notices

FCC STATEMENT

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off

and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

INDUSTRY CANADA STATEMENT

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimetres between the radiator and your body.

Documents / Resources



[ALARM.COM Smart WiFi Gateway](#) [pdf] Installation Guide
ALARM.COM, ADC-SG130, Smart, WiFi, Gateway