

Strong ROUTER1200

STRONG Dual Band Gigabit Router 1200

Instruction Manual

- Overview
- Features
- Components
- Setup
- Operation
- Maintenance
- Troubleshooting
- Specifications
- W
- & Support

1. PRODUCT OVERVIEW

The STRONG Dual Band Gigabit Router 1200 is designed to enhance your internet connection by providing a high-speed Wi-Fi network. It supports the latest 802.11ac standard, offering speeds up to 1200 Mbit/s across both 2.4 GHz and 5 GHz bands. This router is equipped with multiple Gigabit Ethernet ports, a USB 3.0 port, and a Micro SD card slot for versatile connectivity and media sharing.

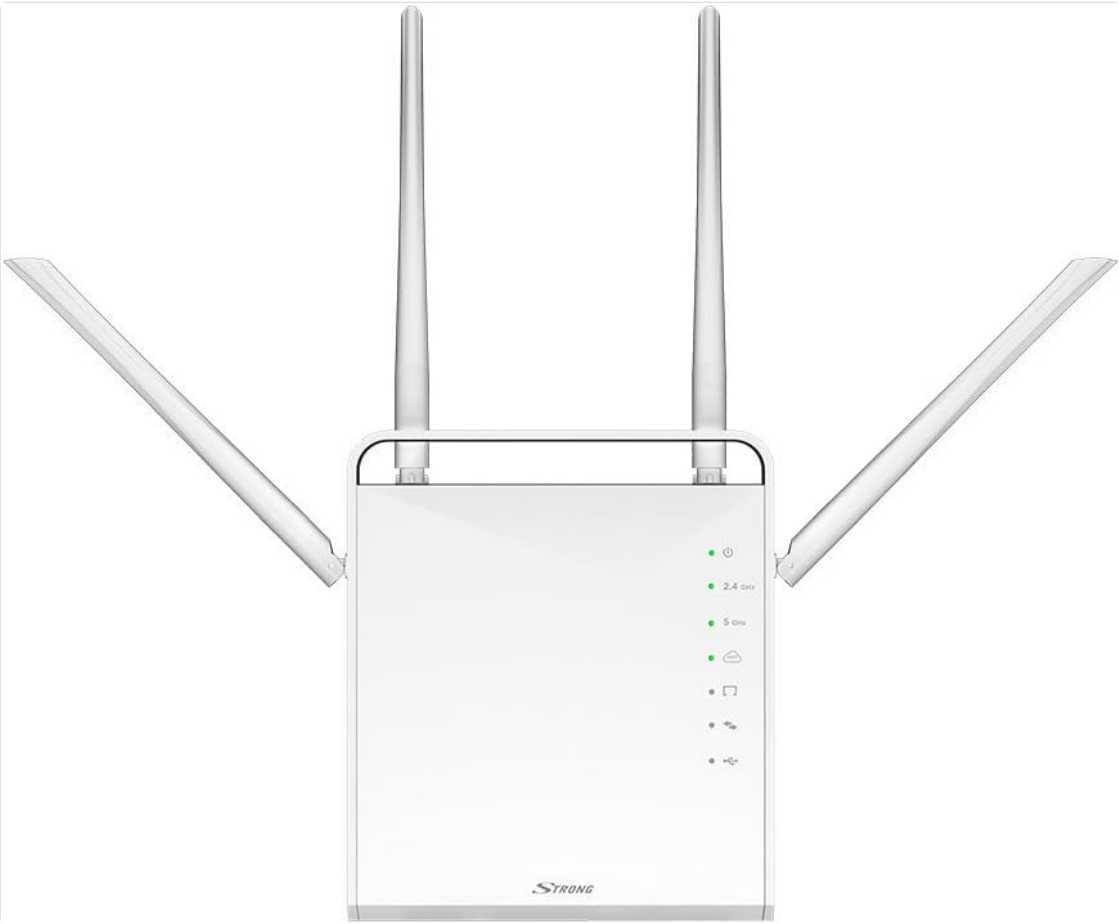


Figure 1: Front view of the STRONG Dual Band Gigabit Router 1200. This image shows the router from the front, highlighting its four adjustable antennas and the LED indicators for power, 2.4 GHz Wi-Fi, 5 GHz Wi-Fi, LAN activity, WAN activity, and USB/WPS status.

2. KEY FEATURES

- **Dual Band Wi-Fi:** Simultaneous 867 Mbit/s on 5 GHz and 300 Mbit/s on 2.4 GHz for a combined 1200 Mbit/s.
- **Gigabit Ethernet Ports:** Four LAN ports and one WAN port for high-speed wired connections.
- **Adjustable Antennas:** Four external adjustable antennas for improved Wi-Fi coverage, reliability, and stability.
- **Enhanced Security:** WPA/WPA2 encryption for optimal Wi-Fi security and a dedicated Guest Wi-Fi network.
- **USB 3.0 Port:** For sharing multimedia content or a USB printer across the network.
- **Micro SD Card Slot:** For sharing multimedia content directly from a Micro SD card.
- **Connect & Secure Button (WPS):** For easy and secure connection of Wi-Fi devices.

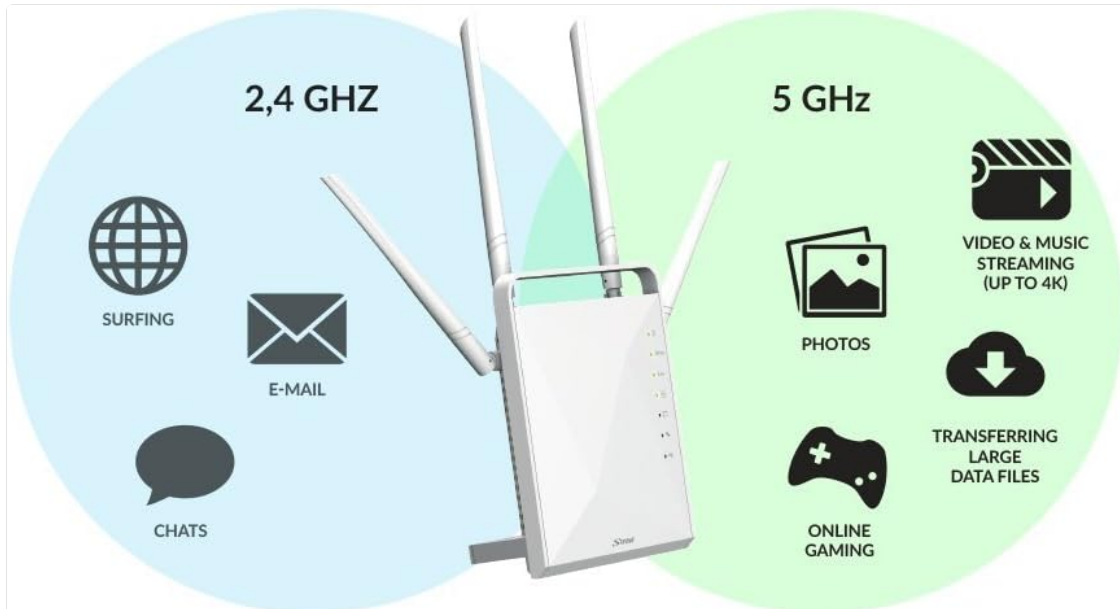


Figure 2: Dual-band functionality. This image visually separates the uses for the 2.4 GHz band (surfing, email, chats) and the 5 GHz band (video & music streaming up to 4K, photos, transferring large data files, online gaming), demonstrating the router's capability to handle various network demands.

3. PRODUCT COMPONENTS AND PORTS

Familiarize yourself with the various ports and indicators on your STRONG Dual Band Gigabit Router 1200.



Figure 3: Rear view and port diagram. This image provides a detailed view of the router's rear panel, clearly labeling the Micro SD card slot, USB port, RESET/WPS button, four yellow Gigabit LAN ports (1-4), one blue Gigabit WAN port, and the power input. It also illustrates common devices that can be connected to these ports, such as desktops, Smart TVs, game consoles, and modems.

3.1. Port Descriptions

- **WAN Port (Blue):** Connects to your modem or internet service provider's device.
- **LAN Ports (Yellow, 1-4):** Connects wired devices such as PCs, Smart TVs, game consoles, or network-attached storage (NAS).
- **USB 3.0 Port:** For connecting USB storage devices (e.g., external hard drives, flash drives) for network sharing, or a USB printer.
- **Micro SD Slot:** For inserting a Micro SD card to share files over the network.
- **RESET/WPS Button:**
 - Press briefly for WPS (Wi-Fi Protected Setup) to quickly connect compatible devices.
 - Press and hold for 10 seconds to reset the router to factory default settings.
- **Power Input:** Connects to the included power adapter.

3.2. LED Indicators

- **Power LED:** Indicates power status.
- **2.4 GHz Wi-Fi LED:** Indicates activity on the 2.4 GHz wireless network.
- **5 GHz Wi-Fi LED:** Indicates activity on the 5 GHz wireless network.
- **LAN LEDs:** Indicate activity on the respective LAN ports.
- **WAN LED:** Indicates activity on the WAN port.

- **USB/WPS LED:** Indicates USB device activity or WPS function status.

4. SETUP GUIDE

4.1. Package Contents

Before you begin, ensure all items are present in the package:

- STRONG Dual Band Gigabit Router 1200
- Power Adapter
- Ethernet Cable
- Quick Installation Guide (this manual serves as a comprehensive guide)

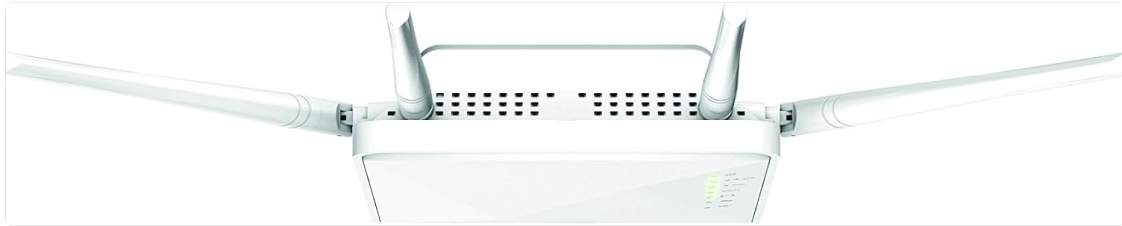


Figure 4: Router packaging. This image displays the retail box for the STRONG Dual Band Gigabit Router 1200, indicating its key features like Dual Band, Gigabit Ethernet ports, USB 3.0, and Micro SD card slot.

4.2. Hardware Connection

1. **Positioning:** Place the router in a central location in your home or office, away from obstructions and sources of interference (e.g., microwaves, cordless phones).
2. **Connect to Modem:** Connect one end of the provided Ethernet cable to the WAN port (blue) on your STRONG router and the other end to an Ethernet port on your existing modem or internet service provider's device.
3. **Power On:** Connect the power adapter to the router's power input and then plug it into a power outlet. The Power LED should light up.
4. **Wait for Initialization:** Allow a few minutes for the router to power on and initialize. The WAN LED should eventually turn solid, indicating a successful connection to your modem.

4.3. Initial Configuration (First-Time Setup)

To configure your router, you will need to access its web-based management interface.

1. **Connect a Device:**
 - **Wired:** Connect your computer to one of the yellow LAN ports on the router using an Ethernet cable.
 - **Wireless:** On your Wi-Fi enabled device (laptop, smartphone), search for available Wi-Fi networks. Connect to the default Wi-Fi network name (SSID) printed on the label at the bottom of your router. The default password will also be on this label.
2. **Access Web Interface:** Open a web browser (e.g., Chrome, Firefox, Edge) and type the default IP address of the router into the address bar. This is typically 192.168.1.1 or 192.168.0.1. Refer to the label on your router for the exact address.
3. **Login:** Enter the default username and password. These are usually admin for both, or specified on the router's label.
4. **Run Setup Wizard:** Upon first login, the router may automatically launch a Quick Setup Wizard. Follow the on-screen instructions to:
 - Set your internet connection type (e.g., DHCP, PPPoE).
 - Change the default Wi-Fi network name (SSID) and password for both 2.4 GHz and 5 GHz bands. Choose strong, unique passwords.

- Change the router's login password for security.

5. **Save Settings:** Apply and save your new settings. The router may restart.

5. OPERATING YOUR ROUTER

5.1. Connecting Devices

- **Wireless Devices:** On your smartphone, tablet, or laptop, search for your new Wi-Fi network name (SSID) and enter the password you set during the initial configuration.
- **Wired Devices:** Connect devices like desktop computers, Smart TVs, or game consoles to any of the yellow LAN ports using an Ethernet cable.

5.2. Understanding Dual Band Wi-Fi

Your router operates on two frequency bands:

- **2.4 GHz Band:** Offers wider coverage and better penetration through walls, suitable for general internet browsing, email, and chat.
- **5 GHz Band:** Provides faster speeds and less interference, ideal for high-bandwidth activities like 4K video streaming, online gaming, and large file transfers. This band has a shorter range and is more susceptible to obstacles.

You can connect devices to the band that best suits their location and usage needs.

5.3. Guest Network

The router supports a dedicated guest Wi-Fi network. This allows visitors to access the internet without gaining access to your main network resources (e.g., shared files, printers). You can enable and configure the guest network through the router's web management interface.

5.4. USB and Micro SD Sharing

You can share files from a USB storage device or a Micro SD card connected to the router across your network. Access these shared resources through network drives on your computers or compatible media players. Refer to the router's web interface for specific configuration steps for file sharing services (e.g., Samba/SMB, FTP).

5.5. WPS (Wi-Fi Protected Setup)

WPS allows you to connect WPS-compatible devices to your Wi-Fi network without manually entering the password. Simply press the WPS button on your router (the same as the RESET button, a short press) and then activate WPS on your device within two minutes. The device will automatically connect.

6. MAINTENANCE

6.1. Firmware Updates

Periodically check the STRONG support website for firmware updates for your router model. Firmware updates can improve performance, add new features, and enhance security. Follow the instructions provided with the firmware update carefully to avoid damaging the device.

6.2. Cleaning

Clean the router regularly with a soft, dry cloth. Do not use liquid cleaners or aerosol sprays. Ensure the ventilation holes are clear of dust to prevent overheating.

6.3. Optimal Placement

For the best Wi-Fi performance, ensure your router is:

- Placed centrally in your home or office.
- Elevated, not on the floor.
- Away from large metal objects, concrete walls, and other electronic devices that may cause interference.
- With antennas adjusted for optimal signal direction.



Figure 5: Router in a home environment. This image shows the router positioned on a wooden media console, demonstrating a typical setup location within a living space.

7. TROUBLESHOOTING

7.1. No Internet Access

- **Check Cables:** Ensure all Ethernet cables are securely connected to the router and modem.
- **Check LEDs:** Verify that the Power, WAN, and Wi-Fi LEDs are lit correctly. If the WAN LED is off or blinking irregularly, there might be an issue with your modem or ISP connection.
- **Reboot Devices:** Power off your modem and router. Wait 30 seconds, then power on the modem first. Once the modem is fully online, power on the router.
- **ISP Issue:** Contact your Internet Service Provider (ISP) to confirm there are no service outages in your area.

7.2. Weak Wi-Fi Signal or Slow Speeds

- **Router Placement:** Relocate the router to a more central and elevated position.

- **Interference:** Move the router away from other electronic devices (e.g., cordless phones, microwaves, Bluetooth devices) and large metal objects.
- **Antenna Adjustment:** Adjust the router's antennas to optimize signal direction.
- **Band Selection:** For devices closer to the router and requiring higher speeds, connect them to the 5 GHz Wi-Fi band.
- **Channel Optimization:** Access the router's web interface and try changing the Wi-Fi channel for both 2.4 GHz and 5 GHz bands to a less congested one.

7.3. Cannot Access Router's Web Interface

- **IP Address:** Ensure you are using the correct IP address (e.g., 192.168.1.1).
- **Wired Connection:** Try connecting your computer directly to the router via an Ethernet cable.
- **IP Settings:** Ensure your computer's network adapter is set to obtain an IP address automatically (DHCP).
- **Firewall/Antivirus:** Temporarily disable any firewall or antivirus software on your computer that might be blocking access.

7.4. Factory Reset

If you forget your router's login password or encounter persistent issues, you can perform a factory reset. This will revert all settings to their default values, including Wi-Fi names and passwords.

1. With the router powered on, locate the RESET/WPS button on the back panel.
2. Using a paperclip or a thin object, press and hold the RESET button for approximately 10 seconds until the LEDs flash.
3. Release the button and wait for the router to restart.
4. After the reset, you will need to reconfigure the router using the initial setup steps (Section 4.3).

8. TECHNICAL SPECIFICATIONS

Feature	Description
Brand	Strong
Model Name	1200
Model Number	ROUTER1200
Wireless Standard	802.11ac
Frequency Band Class	Tri-band (2.4 GHz and 5 GHz supported)
Data Transfer Rate	Up to 1200 Mbit/s (300 Mbit/s @ 2.4 GHz + 867 Mbit/s @ 5 GHz)
Ethernet Ports	4x Gigabit LAN, 1x Gigabit WAN
USB Ports	1x USB 3.0
Special Features	WPS (Wi-Fi Protected Setup)
Compatible Devices	Game console, Personal computer, Smartphone, Tablet, Smart TV
Color	White
Included Components	Ethernet Cable
Manufacturer	STRONG

Feature	Description
Country of Origin	China

9. WARRANTY AND SUPPORT

9.1. Warranty Information




For detailed warranty information, please refer to the warranty card included with your product or visit the official STRONG website. Keep your purchase receipt as proof of purchase for warranty claims.


9.2. Technical Support

If you encounter issues that cannot be resolved using this manual, please contact STRONG technical support. Support contact details can typically be found on the official STRONG website or in the product packaging. You can also visit the [Strong Brand Store on Amazon](#) for more information and product updates.

© 2024 STRONG. All rights reserved.
Model: ROUTER1200

Related Documents


	STRONG 4G+ LTE ROUTER 1200 Quick Installation Guide Step-by-step guide to setting up your STRONG 4G+ LTE ROUTER 1200, including SIM card insertion, antenna connection, power, and network configuration. Find Wi-Fi details and service center contacts.
	STRONG 4G+ LTE ROUTER 4G+ROUTER1200 Installation Guide This guide provides essential information for setting up your STRONG 4G+ LTE ROUTER 4G+ROUTER1200, including SIM card insertion, antenna connection, power setup, network configuration, and service center contacts.
	Strong Atria Wi-Fi Mesh Home Kit 1200 Installation Guide Comprehensive installation guide for the Strong Atria Wi-Fi Mesh Home Kit 1200, covering setup, connection, and app usage for optimal home Wi-Fi coverage.
	STRONG ATRIA WI-FI MESH 1200 ADD-ON Installation Guide This guide provides installation instructions for the STRONG ATRIA WI-FI MESH 1200 ADD-ON, designed to extend your Strong Mesh 1200 Network. It includes setup diagrams and service center contact information.



[STRONG 4G+ LTE ROUTER 4G+ROUTER1200 Installation Guide](#)

This guide provides essential information for setting up your STRONG 4G+ LTE ROUTER 4G+ROUTER1200, including SIM card insertion, antenna connection, power setup, network configuration, and service center contacts.

lang:it **score:36** filesize: 1.12 M page_count: 2 document date: 2022-06-24




[\[pdf\] User Manual Instructions](#)

5a 5b 6 avXperten4G ROUTER1200 Wi Fi Name STRONG XXXX 2 4GHz 5GHz Password XXXXXXXXXX IP 192 168 188 1Username adminPassword manual 62215 27893715avxperter dk files 56697 manual 27893715 srsItid AfmBOooHnRjnPk4 Lcq22SWdCHlkpvpaulMYa1VzGf9OWSdOQhacE9g |||

5a STRONG_XXXX_2.4GHz STRONG_XXXX_5GHz Wi-Fi 1 Wi-Fi 2 Network settings 4G **ROUTER1200** Wi-Fi Name: STRONG_XXXX_2.4GHz Wi-Fi Name: STRONG_XXXX_5GHz Wi-Fi Password: XXXXXXXXXX IP : 192.168.188.1 Username: admin Password: XXXXXXXX Input: 12 V DC 1.5 A Supplied by STRONG AUSTRIA Represented by STRONG G...

lang:it **score:34** filesize: 1.12 M page_count: 2 document date: 2022-06-24

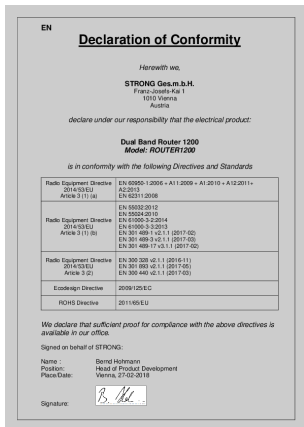

[\[pdf\] Declaration of Conformity](#)

Declaration of Conformity 41 Hans Hagenaaers Strong Nederland BV ROUTER1200 conformity DoC Router1200 all Languages eu strong tv doc |||

EN Declaration of Conformity Herewith we, STRONG Ges.m.b.H. Franz-Josefs-Kai 1 1010 Vienna Austria declare under our responsibility that the electrical product: Dual Band Router 1200 Model: **ROUTER1200** is in conformity with the following Directives and Standards Radio Equipment Directive EN 60950...

lang:de **score:31** filesize: 178.01 K page_count: 18 document date: 2018-03-08



[\[pdf\]](#)

Produktdokument Dualband Wifi router 1200Mbit 4x Gigabit LAN ROUTER1200S order se strong |||

Dual Band Gigabit Router 1200S Liva upp din Internet-bredbandsanslutning 1200 Mbit/s
STRONG Dual ... 0 -90 utan kondens Mtt i mm B x D x H : 235*140*26 mm Vikt i kg: 0.27 20
Oct 2020 17:42 EAN **ROUTER1200S**: 9120072372315 Till fljd av kontinuerlig forskning och
utveckling kan tekniska specifika...

lang:no score:24 filesize: 231.14 K page_count: 2 document date: 2020-10-20

[\[pdf\]](#) Decleration of Conformity

Microsoft Word 4G^MRouter1200 EU multilanguage DoC issue 1 docx vmaxk STRONG 4G Router EN

DECLARATION OF CONFORMITY Descriere ROUTER1200 m b H Teinfaltstraße 8 4 Dunaj 1010 Avstrija Predmet i
izjave Opis 4GR1200 CE cdn reichelt.de documents datenblatt E910 |||

EN DECLARATION OF CONFORMITY This declaration of conformity is issued under the sole
responsibility of the manufacturer STRONG Ges.m.b.H., Teinfaltstrae, 8/4 Wien, Wien, 1010
Austria Object s of declaration STRONG 4G Router Description 4G **ROUTER1200** The object
of the declaration described above ...

lang:de score:23 filesize: 1.88 M page_count: 20 document date: 2022-08-08



[\[pdf\]](#)

Gyártói adatlap Strong ROUTER1200 Dual Band Gigabit vezeték nélküli router PCE Számítástechnika webáruház
Elektrix Rendszerház Kft Router 1200 LL HU strong tv leaflets |||

1200 Mbit/s Dual Band Ktsvos Gigabit Router 1200 Keltse letre Szlessv internetkapcsolatt A
STRONG ... Itozatlan halmazllapot Mretek SZ x M x Ma : 195 75 335mm Sly: 0.46 Kg 27 Apr
2017 17:58 EAN **ROUTER1200**: 8717185449846 In consequence of continuous research and
development the technical speci ...


lang:no score:23 filesize: 197.84 K page_count: 2 document date: 2017-04-27



[pdf]

Untitled 1200 Mbit s Dual Band Gigabit Router 1200S 14 May 2021 17 24 EAN ROUTER1200S 9120072372315
strong tv Wi Fi Frequency 2 4 GHz and 5 concurrent Standards IEEE 802 11ac n a LL EN RM 05 21 app |||
Dual Band Gigabit Router 1200S Revive your Broadband Internet connection 1200 Mbit/s The
STRONG D ... ondensing Dimensions in mm W x D x H : 235*140*26 mm Weight in kg: 0.27
14 May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 In consequence of continuous
research and development the technical speci...

lang:en **score:20** filesize: 207.55 K page_count: 2 document date: 2022-02-09



[pdf]

Náhled * souboru s návodem k obsluze NÁVOD K OBSLUZE Router Strong 4G LTE 1200 bílý Databáze návodů v
češtině router strong 4g lte bílý 119899 locked navod cz preview 120 |||
5a STRONG_XXXX_2.4GHz STRONG_XXXX_5GHz Wi-Fi 1 Wi-Fi 2 Network settings 4G
ROUTER1200 Wi-Fi Name: STRONG_XXXX_2.4GHz Wi-Fi Name: STRONG_XXXX_5GHz
Wi-Fi Password: XXXXXXXXXXXX IP : 192.168.188.1 Username: admin Password: XXXXXXXXXX
Input: 12 V DC 1.5 A Supplied by STRONG AUSTRIA Represented by STRONG G...
lang:it **score:20** filesize: 620.7 K page_count: 2 document date: 2023-08-17



[pdf]

1200 Mbit s Router Gigabit de banda dual 27 Apr 2017 17 58 EAN ROUTER1200 8717185449846 strong tv Wifi
Frecuencia 2 4 GHz y 5 simultáneamente Estándares IEEE 802 11ac n a DUAD BAND ROUTER antares sistemas
es images descargas |||
Router Gigabit de banda dual 1200 Revive tu conexin a internet de banda ancha 1200 Mbit/s
El Rout ... Dimensiones en mm Ancho x Largo x Alto : 195 75 335 Peso en kg: 0.46 27 Apr
2017 17:58 EAN **ROUTER1200**: 8717185449846 Debido a la continua investigacin y
desarrollo, las especi caciones tcnica...
lang:es **score:19** filesize: 282.65 K page_count: 2 document date: 2017-10-04

[pdf] Declaration of Conformity




ROUTER 1200 S Declaration of conformity Dual Band Gigabit Router 1200S DoC RL 19 07 21 eu strong tv doc |||
EN Declaration of Conformity Herewith we, STRONG Ges.m.b.H Teinfaltstrae 8/4.Stock A-
1010 Vienna, Austria declare under our responsibility that the electrical product: Dual Band
Router 1200S Model: **ROUTER1200S** is in conformity with the following Directives and
Standards Radio Equipment Directiv...
lang:de **score:19** filesize: 67.38 K page_count: 2 document date: 2021-07-19

[\[pdf\]](#) Declaration of Conformity

Untitled Voir le marquage CE Strong 1200S Wi Fi 5 802 11ac Bi bande 2 4 GHz Ethernet LAN Blanc bol original media s xNN8QkY81mPz |||

EN Declaration of Conformity Herewith we, STRONG Ges.m.b.H Teinfaltstroe 8/4.Stock A-1010 Vienna, Austria declare under our responsibility that the electrical product: Dual Band Router 1200S Model: **ROUTER1200S** is in conformity with the following Directives and Standards Radio Equipment Directi...

lang:de **score:19** filesize: 42.8 K page_count: 2 document date: 2022-02-09

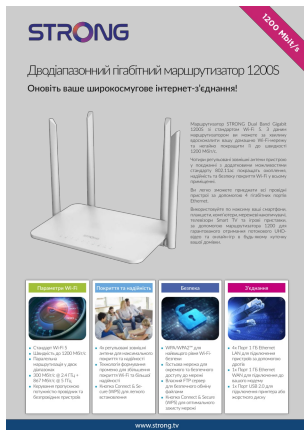

[\[pdf\]](#)

Untitled Листівка Router 1200S Широкопasmовий маршрутизатор Strong eu Dual Band Gigabit LL UA RM 14 05 21 strong app |||

1200 Mbit/s 1200S - STRONG Dual Band Gigabit 1200S Wi-Fi 5. Wi-Fi- 1200 / ... : -20- 70 : 0 - 90 : 0 -90 235*140*26 x x 0.27 14 May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 , - . STRONG , / STRONG . . Wi-Fi ...

lang:en **score:18** filesize: 205.17 K page_count: 2 document date: 2022-02-08



[\[pdf\]](#)

Untitled Prospektus Router 1200 Szélessávú Strong eu Dual Band Gigabit LL HU strong app |||

1200 Mbit/s Dual Band Ktsvos Gigabit Router 1200 Keltse letre Szlessv internetkapcsolatt A STRONG ... ltozatlan halmazllapot Mretek SZ x M x Ma : 195 75 335mm Sly: 0.46 Kg 27 Apr 2017 17:58 EAN **ROUTER1200**: 8717185449846 In consequence of continuous research and development the technical specif...

lang:no **score:17** filesize: 135.39 K page_count: 2 document date: 2022-02-08



[\[pdf\]](#)

Untitled Brosjyre Router 1200 Bredbnds Ruter Strong eu Dual Band Gigabit LL NO strong app |||

Dual Band Gigabit Router 1200 RevivGjenoppliv din Bredbndsforbindelse 1200 Mbit/s STRONG Dual Ban ... ondensing Dimensions in mm W x D x H : 195 75 335 Weight in kg: 0.46 27 Apr 2017 17:58 EAN **ROUTER1200**: 8717185449846 Som flge av kontinuerlig forskning og utvikling av de tekniske spesifikasj...

lang:no **score:17** filesize: 133.77 K page_count: 2 document date: 2022-02-09



[pdf]

Русский Dual Band Gigabit Router 1200 LL RU eu strong tv leaflets |||

1200 Mbit/s 1200 - 1200 STRONG Wi-Fi 802.11ac. Wi-Fi 1200 / ... 70 C : 10 -90 : 5 -90 195 x 75 x 335 x x 0.46 11 Oct 2017 17:46 EAN **ROUTER1200**: 8717185449846 , - . STRONG , / STRONG . . Wi-Fi ...

lang:en score:17 filesize: 236.22 K page_count: 2 document date: 2017-10-11



[pdf]

Українська Dual Band Gigabit Router 1200 LL UA eu strong tv leaflets |||

1200 Mbit/s 1200 - 1200 STRONG Wi-Fi 802.11ac. Wi-Fi- 1200 / ... 70 C : 10 -90 : 5 -90 195 x 75 x 335 x x 0.46 29 Sep 2017 10:08 EAN **ROUTER1200**: 8717185449846 , - . STRONG , / STRONG . . Wi-Fi ...

lang:en score:17 filesize: 237.99 K page_count: 2 document date: 2017-09-29



[pdf]

Untitled Broschyr Router 1200 Bredbands router Strong eu Dual Band Gigabit LL SE strong app |||

Dual Band Gigabit Router 1200 Liva upp din Internet-bredbandsanslutning 1200 Mbit/s STRONGs Dual ... 5 -90 utan kondens Mtt i mm B x D x H : 195 75 335 Vikt i kg: 0.46 27 Apr 2017 17:58 EAN **ROUTER1200**: 8717185449846 Till fjld av kontinuerlig forskning och utveckling kan tekniska specifikat...

lang:no score:17 filesize: 137.91 K page_count: 2 document date: 2022-02-08



[\[pdf\]](#)

Untitled Datenblatt Router 1200 Breitband Strong eu Dual Band Gigabit LL DE RM 15 09 21 strong app |||

Dual Band Gigabit Router 1200 Beleben Sie Ihre Breitband-Internetverbindung 1200 Mbit/s

Der STRON ... sierend Abmessungen in mm B x T x H : 195 75 335 Gewicht in kg: 0.46 15 Sep

2021 12:03 EAN **ROUTER1200**: 8717185449846 In Folge kontinuierlicher Forschung und

Entwicklung können sich Spezifikati...

lang:de score:17 filesize: 148.23 K page_count: 2 document date: 2022-02-08

[\[pdf\]](#)

Datenblatt Router 1200S Breitband Strong eu Dual Band Gigabit LL DE RM 14 05 21 strong agencer2 app |||

Dual Band Gigabit Router 1200S Beleben Sie Ihre Breitband Internetverbindung 1200 Mbit/s

Der STRO ... ierend Abmessungen in mm B x T x H : 235*140*26 mm Gewicht in kg: 0. 27 14

May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 In Folge kontinuierlicher Forschung

und Entwicklung können sich Spezifikat...

lang:de score:17 filesize: 269.35 K page_count: 2 document date: 2021-05-14

[\[pdf\]](#)

Untitled Datenblatt Router 1200S Breitband Strong eu Dual Band Gigabit LL DE RM 14 05 21 strong app |||

Dual Band Gigabit Router 1200S Beleben Sie Ihre Breitband Internetverbindung 1200 Mbit/s

Der STRO ... ierend Abmessungen in mm B x T x H : 235*140*26 mm Gewicht in kg: 0. 27 14

May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 In Folge kontinuierlicher Forschung

und Entwicklung können sich Spezifikat...

lang:de score:17 filesize: 212.87 K page_count: 2 document date: 2022-02-09



[pdf] Borchure

Untitled Brochure Router 1200S Bredbåndsruter Strong eu Dual Band Gigabit LL DK RM 14 05 21 strong app |||

Dual Band Gigabit Router 1200S Genopliv din internetforbindelse 1200 Mbit/s STRONG Dual Band Giga ... -90 ikke-kondenserende Dimensioner BxDxH : 235*140*26 mm Vgt: 0.27 kg 14 May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 Som konsekvens af lbende research og udvikling, kan tekniske specifikatio...

lang:da score:17 filesize: 207.89 K page_count: 2 document date: 2022-02-08



[pdf]

Unlited Ulotka Router 1200 Routery dwuzakresowe Strong eu Dual Band Gigabit LL PL strong app |||

1200 Mbit/s Dwuzakresowy Gigabit Router 1200 Ultraszybkie polczenie szerokopasmowe z internetem Dwu ... ndensacji Wymiary w mm 195 x 75 x 335 szer x glb x wys Waga w kg 0.46 30 Jun 2017 15:18 EAN **ROUTER1200**: 8717185449846 W wyniku ciglych bada i udoskonale -specyfikacje techniczne, wykonanie or...

lang:pl score:17 filesize: 137.91 K page_count: 2 document date: 2022-02-09



[pdf]

Български Dual Band Gigabit Router 1200 LL BG eu strong tv leaflets |||

Dual Band Gigabit 1200 1200 Mbit/s STRONG Dual Band Gigabit 1200 - 802.11ac Wi-Fi : ... : 10 -90 : 5 -90 W x D x H : 195 x 75 x 335 : 0.46 25 Oct 2017 16:50 EAN **ROUTER1200**: 8717185449846 , , . STRONG , / , , STRONG. ...

lang:en score:17 filesize: 264.09 K page_count: 2 document date: 2017-10-25



[pdf] Borchure

Brochure Router 1200 Bredbåndsruter Strong eu Dual Band Gigabit LL DK RM 15 09 21 strong app |||

Dual Band Gigabit Router 1200 Genopliv din internetforbindelse 1200 Mbit/s STRONG Dual Band Gigab ... 0 ikke-kondenserende Dimensioner BxDxH : 195 75 335 mm Vgt: 0.46 kg 15 Sep 2021 12:03 EAN **ROUTER1200**: 8717185449846 Som konsekvens af lbende research og udvikling, kan tekniske specifikation...

lang:da score:17 filesize: 242.11 K page_count: 2 document date: 2021-09-15



[pdf]

Untitled Broschyr Router 1200S Bredbands router Strong eu Dual Band Gigabit LL SE RM 14 05 21 strong app |||

Dual Band Gigabit Router 1200S Liva upp din Internet-bredbandsanslutning 1200 Mbit/s

STRONG Dual ... 0 -90 utan kondens Mtt i mm B x D x H : 235*140*26 mm Vikt i kg: 0.27 14

May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 Till fjld av kontinuerlig forskning och utveckling kan tekniska specifika...

lang:no score:17 filesize: 209.37 K page_count: 2 document date: 2022-02-08



[pdf]


Untitled Datenblatt Router 1200 Breitband Strong eu Dual Band Gigabit LL DE RM 15 09 21 strong agencer2 app |||

Dual Band Gigabit Router 1200 Beleben Sie Ihre Breitband-Internetverbindung 1200 Mbit/s

Der STRON ... sierend Abmessungen in mm B x T x H : 195 75 335 Gewicht in kg: 0.46 15 Sep

2021 12:03 EAN **ROUTER1200**: 8717185449846 In Folge kontinuierlicher Forschung und Entwicklung knnen sich Spezifikati...

lang:de score:17 filesize: 148.23 K page_count: 2 document date: 2022-02-08

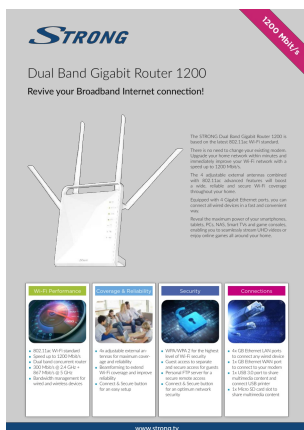

[pdf]

Untitled Leaflet Router 1200 Broadband Strong tv Dual Band Gigabit LL EN RM 15 09 21 strong agencer2 app |||

Dual Band Gigabit Router 1200 Revive your Broadband Internet connection 1200 Mbit/s The

STRONG Du ... ondensing Dimensions in mm W x D x H : 195 75 335 Weight in kg: 0.46 15

Sep 2021 12:03 EAN **ROUTER1200**: 8717185449846 In consequence of continuous research and development the technical specif...

lang:en score:17 filesize: 145.97 K page_count: 2 document date: 2022-02-08



[pdf] Borchure

Untitled Brochure Router 1200S Bredbåndsruter Strong eu Dual Band Gigabit LL DK RM 14 05 21 strong agencer2 app |||

Dual Band Gigabit Router 1200S Genopliv din internetforbindelse 1200 Mbit/s STRONG Dual Band Giga ... -90 ikke-kondenserende Dimensioner BxDxH : 235*140*26 mm Vgt: 0.27 kg 14 May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 Som konsekvens af lbende research og udvikling, kan tekniske specifikatio...

lang:da score:17 filesize: 207.89 K page_count: 2 document date: 2022-02-08



[pdf]

Untitled Brosjyre Router 1200S Bredbåndsruter Strong eu Dual Band Gigabit LL NO RM 14 05 21 strong app |||

Dual Band Gigabit Router 1200S Gjenoppliv din Bredbndsforbindelse 1200 Mbit/s Det er ikke ndvendi ... ondensing Dimensions in mm W x D x H : 235*140*26 mm Weight in kg: 0.27 14 May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 Som flge av kontinuerlig forskning og utvikling av de tekniske spesifikas...

lang:no score:17 filesize: 209.55 K page_count: 2 document date: 2022-02-08




[pdf]

Untitled Prospektus Router 1200S Szélessávú Strong eu Dual Band Gigabit LL HU RM 14 05 21 strong app |||

1200 Mbit/s Dual Band Ktsvos Gigabit Router 1200S Keltse letre Szlessv internetkapcsoltatt Nem kel ... vltozatlan halmazllapot Mretek SZ x M x Ma : 235*140*26 mm Sly: 0.27 14 May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 A folyamatos kutats s fejlesztés kvetkeztben a termk technikai jellemzi, a...

lang:no score:17 filesize: 212.45 K page_count: 2 document date: 2022-02-08

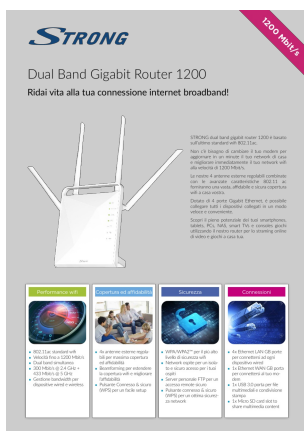

[pdf]

scheda tecnica Dual Band Gigabit Router 1200 Broadband router Strong eu LL IT RM 15 09 21 strong app |||

Dual Band Gigabit Router 1200 Ridai vita alla tua connessione internet broadband 1200 Mbit/s STRO ... on condensato Dimensione in mm W x D x H : 195 75 335 Peso in kg 0.46 15 Sep 2021 12:03 EAN **ROUTER1200**: 8717185449846 In conseguenza a continue ricerche e sviluppo delle caratteristiche tecnic...

lang:it score:17 filesize: 239.46 K page_count: 2 document date: 2021-09-15



[pdf]

Untitled Brosjyre Router 1200S Bredbånds Ruter Strong eu Dual Band Gigabit LL NO RM 14 05 21 strong agencer2 app |||

Dual Band Gigabit Router 1200S Gjenoppliv din Bredbndsforbindelse 1200 Mbit/s Det er ikke ndvendi ... ondensing Dimensions in mm W x D x H : 235*140*26 mm Weight in kg: 0.27 14 May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 Som flge av kontinuerlig forskning og utvikling av de tekniske spesifikas...

lang:no **score:17** filesize: 209.55 K page_count: 2 document date: 2022-02-08



[pdf]

Untitled Leták Router 1200S Širokopásmový smerovač Strong eu Dual Band Gigabit LL SK RM 14 05 21 strong app |||

Dvojpsmov gigabitov smerovac Dual Band Gigabit Router 1200S Ozivte svoje vysokorchlostn internetov p ... ndenzcie Rozmery v mm S x H x V : 235 * 140 * 26 mm Hmotnos v kg: 270 g 14 May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 V dsledku prebiehajceho vskumu a vvoja technickch specifikci sa dizajn, v...

lang:it **score:17** filesize: 203.67 K page_count: 2 document date: 2022-02-08



[pdf] Diagram

Untitled Leták Router 1200S Širokopásmový router Strong eu Dual Band Gigabit LL CZ RM 14 05 21 strong app ||| 1200 Mbit/s Dvoupsmov gigabitov router 1200S Zrychlete sv širokopsmov pipojen k internetu Dvoupsmo ... bez kondenzace Rozmry v mm S H V : 235*140*26 mm Hmotnost v kg: 0.27 14 May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 V dsledku neustlho vzkumu a vvoje se mohou technick daje, design, vyobraz...

lang:en **score:17** filesize: 209.81 K page_count: 2 document date: 2022-02-08



[pdf]

Untitled Brošura Router 1200S Širokopojasni usmjerivač Strong eu Dual Band Gigabit LL HR RM 14 05 21 strong app |||

1200 Mbit/s Dvopojasni gigabitni usmjerivac 1200S Ozivite svoju širokopojasnu internetsku vezu Dvop ... z kondenzacije Dimenzije u mm S x D x V : 235*140*26 mm Masa u kg: 0.27 14 May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 Zbog stalnog istrazivanja i razvoja, dizajn, slika i izgled proizvoda mog...

lang:hr **score:17** filesize: 200.88 K page_count: 2 document date: 2022-02-08



[pdf]

Untitled Folleto Router 1200 de banda ancha Strong eu Dual Band Gigabit LL ES strong app |||

Router Gigabit de banda dual 1200 Revive tu conexin a internet de banda ancha 1200 Mbit/s

El Rout ... Dimensiones en mm Ancho x Largo x Alto : 195 75 335 Peso en kg: 0.46 27 Apr

2017 17:58 EAN **ROUTER1200**: 8717185449846 Debido a la continua investigacin y desarrollo, las especificaciones tcnic...

lang:es score:17 filesize: 129.68 K page_count: 2 document date: 2022-02-09



[pdf]

Untitled Brošura Router 1200S Širokopojasni usmjerivač Strong eu Dual Band Gigabit LL HR RM 14 05 21 strong

agencer2 app |||

1200 Mbit/s Dvopojasni gigabitni usmjerivac 1200S Ozivite svoju sirokopojasnu internetsku

vezu Dvop ... z kondenzacije Dimenzije u mm S x D x V : 235*140*26 mm Masa u kg: 0.27 14

May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 Zbog stalnog istrazivanja i razvoja,

dizajn, slika i izgled proizvoda mog...

lang:hr score:17 filesize: 200.88 K page_count: 2 document date: 2022-02-08



[pdf]

Untitled Dvopojasni gigabitni usmjerivač 1200 Strong tv 7 days ago — tvrtke STRONG temelji se na najnovijem Wi Fi

standardu 802 11ac Ne morate mijenjati svoj trenutni modem Dual Band Gigabit Router LL HR strong app |||

Dvopojasni gigabitni usmjerivac 1200 Ozivite svoju sirokopojasnu internetsku vezu 1200 Mbit/s

Dvo ... bez kondenzacije Dimenzije S x D x V : 195 75 335 mm Masa u kg: 0,46 27 Apr 2017

17:58 EAN **ROUTER1200**: 8717185449846 Zbog stalnog istrazivanja i razvoja, dizajn, slika i

izgled proizvoda mogu...

lang:hr score:16 filesize: 126.46 K page_count: 2 document date: 2022-02-08



[pdf]

Untitled Dépliant Routeur 1200S Routeurs Strong eu Dual Band Gigabit Router LL FR RM 14 05 21 strong app |||

Routeur Gigabit Dual Band 1200S Redonner de la puissance votre connexion Internet 1200 Mbit/s P ... ondensation Dimensions in mm L x P x H : 235*140*26 mm Poids : 0.27 kg 14 May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 STRONG ne peut tre tenu responsable de quelque manire que ce soit concern...

lang:fr score:16 filesize: 210.93 K page_count: 2 document date: 2022-02-09




[pdf]

Dépliant Routeur 1200S Routeurs Strong eu Dual Band Gigabit Router LL FR RM 14 05 21 strong agencer2 app |||

Routeur Gigabit Dual Band 1200S Redonner de la puissance votre connexion Internet 1200 Mbit/s P ... ondensation Dimensions in mm L x P x H : 235*140*26 mm Poids : 0.27 kg 14 May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 STRONG ne peut tre tenu responsable de quelque manire que ce soit concern...

lang:fr score:16 filesize: 268.32 K page_count: 2 document date: 2021-05-14

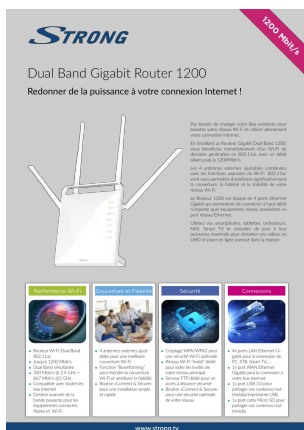

[pdf]

Untitled Dépliant Routeur 1200 Routeurs Strong eu Dual Band Gigabit Router LL FR RM 15 09 21 strong app |||

Dual Band Gigabit Router 1200 Redonner de la puissance votre connexion Internet 1200 Mbit/s Pas ... ndensation Dimensions in mm L x P x H : 195 75 335 Poids : 0.46 kg 15 Sep 2021 12:03 EAN **ROUTER1200**: 8717185449846 STRONG ne peut tre tenu responsable de quelque manire que ce soit concerna...


lang:fr score:16 filesize: 151.58 K page_count: 2 document date: 2022-02-08



[pdf] User Manual

Folheto Router Dual Band Gigabit 1200S Roteador de Banda Larga Strong eu LL PT RM 14 05 21 1 strong app ||| Router Dual Band Gigabit 1200S Reanime a sua ligao Internet de Banda Larga 1200 Mbit/s STRONG Du ... sem condensao Dimenses em mm L x P x A : 235*140*26 mm Peso em kg: 0.27 14 May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 Como consecuencia da contrnua investigao e desenvolvimento, as especificaes...

lang:pt score:16 filesize: 269.53 K page_count: 2 document date: 2021-05-14

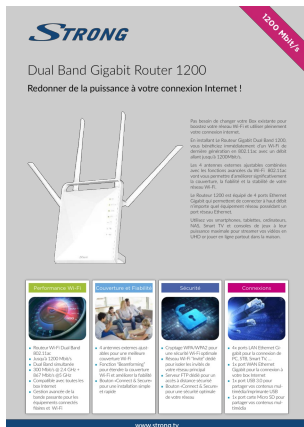

[pdf]

Untitled Dépliant Routeur 1200 Routeurs Strong eu Dual Band Gigabit Router LL FR RM 15 09 21 strong agencer2 app ||| Dual Band Gigabit Router 1200 Redonner de la puissance votre connexion Internet 1200 Mbit/s Pas ... ndensation Dimensions in mm L x P x H : 195 75 335 Poids : 0.46 kg 15 Sep 2021 12:03 EAN **ROUTER1200**: 8717185449846 STRONG ne peut tre tenu responsable de quelque manire que ce soit concerna...

lang:fr score:16 filesize: 151.58 K page_count: 2 document date: 2022-02-08



[pdf]

Untitled Folleto Router 1200S de banda ancha Strong eu Dual Band Gigabit LL ES RM 14 05 21 strong app ||| Router Gigabit de banda dual 1200S Revive tu conexin a internet de banda ancha 1200 Mbit/s STRONG ... Dimensiones en mm Ancho x Largo x Alto : 235*140*26 mm Peso en kg: 0.27 14 May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 Debido a la continua investigacin y desarrollo, las especificaciones tcni...

lang:es score:16 filesize: 209.3 K page_count: 2 document date: 2022-02-08



[pdf]

Untitled Folleto Router 1200S de banda ancha Strong eu Dual Band Gigabit LL ES RM 14 05 21 strong agencer2 app ||| Router Gigabit de banda dual 1200S Revive tu conexin a internet de banda ancha 1200 Mbit/s STRONG ... Dimensiones en mm Ancho x Largo x Alto : 235*140*26 mm Peso en kg: 0.27 14 May 2021 17:24 EAN **ROUTER1200S**: 9120072372315 Debido a la continua investigacin y desarrollo, las especificaciones tcni...

lang:es score:16 filesize: 209.3 K page_count: 2 document date: 2022-02-08

