havit HV-KB389L

havit Mechanical Keyboard and Mouse Combo User Manual

Model: HV-KB389L

1. Introduction

Thank you for choosing the havit Mechanical Keyboard and Mouse Combo. This product is designed to enhance your gaming and computing experience with its responsive mechanical keys, customizable RGB lighting, and programmable mouse. This manual provides detailed instructions on setting up, operating, and maintaining your new peripheral set.



Figure 1: Havit Mechanical Keyboard and Mouse Combo (Model HV-KB389L)

2. Product Features

2.1 Keyboard Features:

- **RGB Lighting:** Features 14 distinct light modes for dynamic visual effects.
- **Multimedia Keys:** 12 dedicated multimedia keys (Fn + F1 ~ F12) for quick access to functions.
- **Detachable Wrist Rest:** Provides ergonomic support and comfort during extended use.
- **Plug and Play:** No driver installation required for basic functionality.
- **Anti-Ghosting:** All 105 keys support anti-ghosting for precise input.
- **WIN Key Lock:** Dedicated function to lock the Windows key, preventing accidental interruptions during gaming.
- **Durable Design:** Non-slip, ergonomic, and splash-proof construction.



Figure 2: Programmable Mechanical Keyboard with RGB lighting.

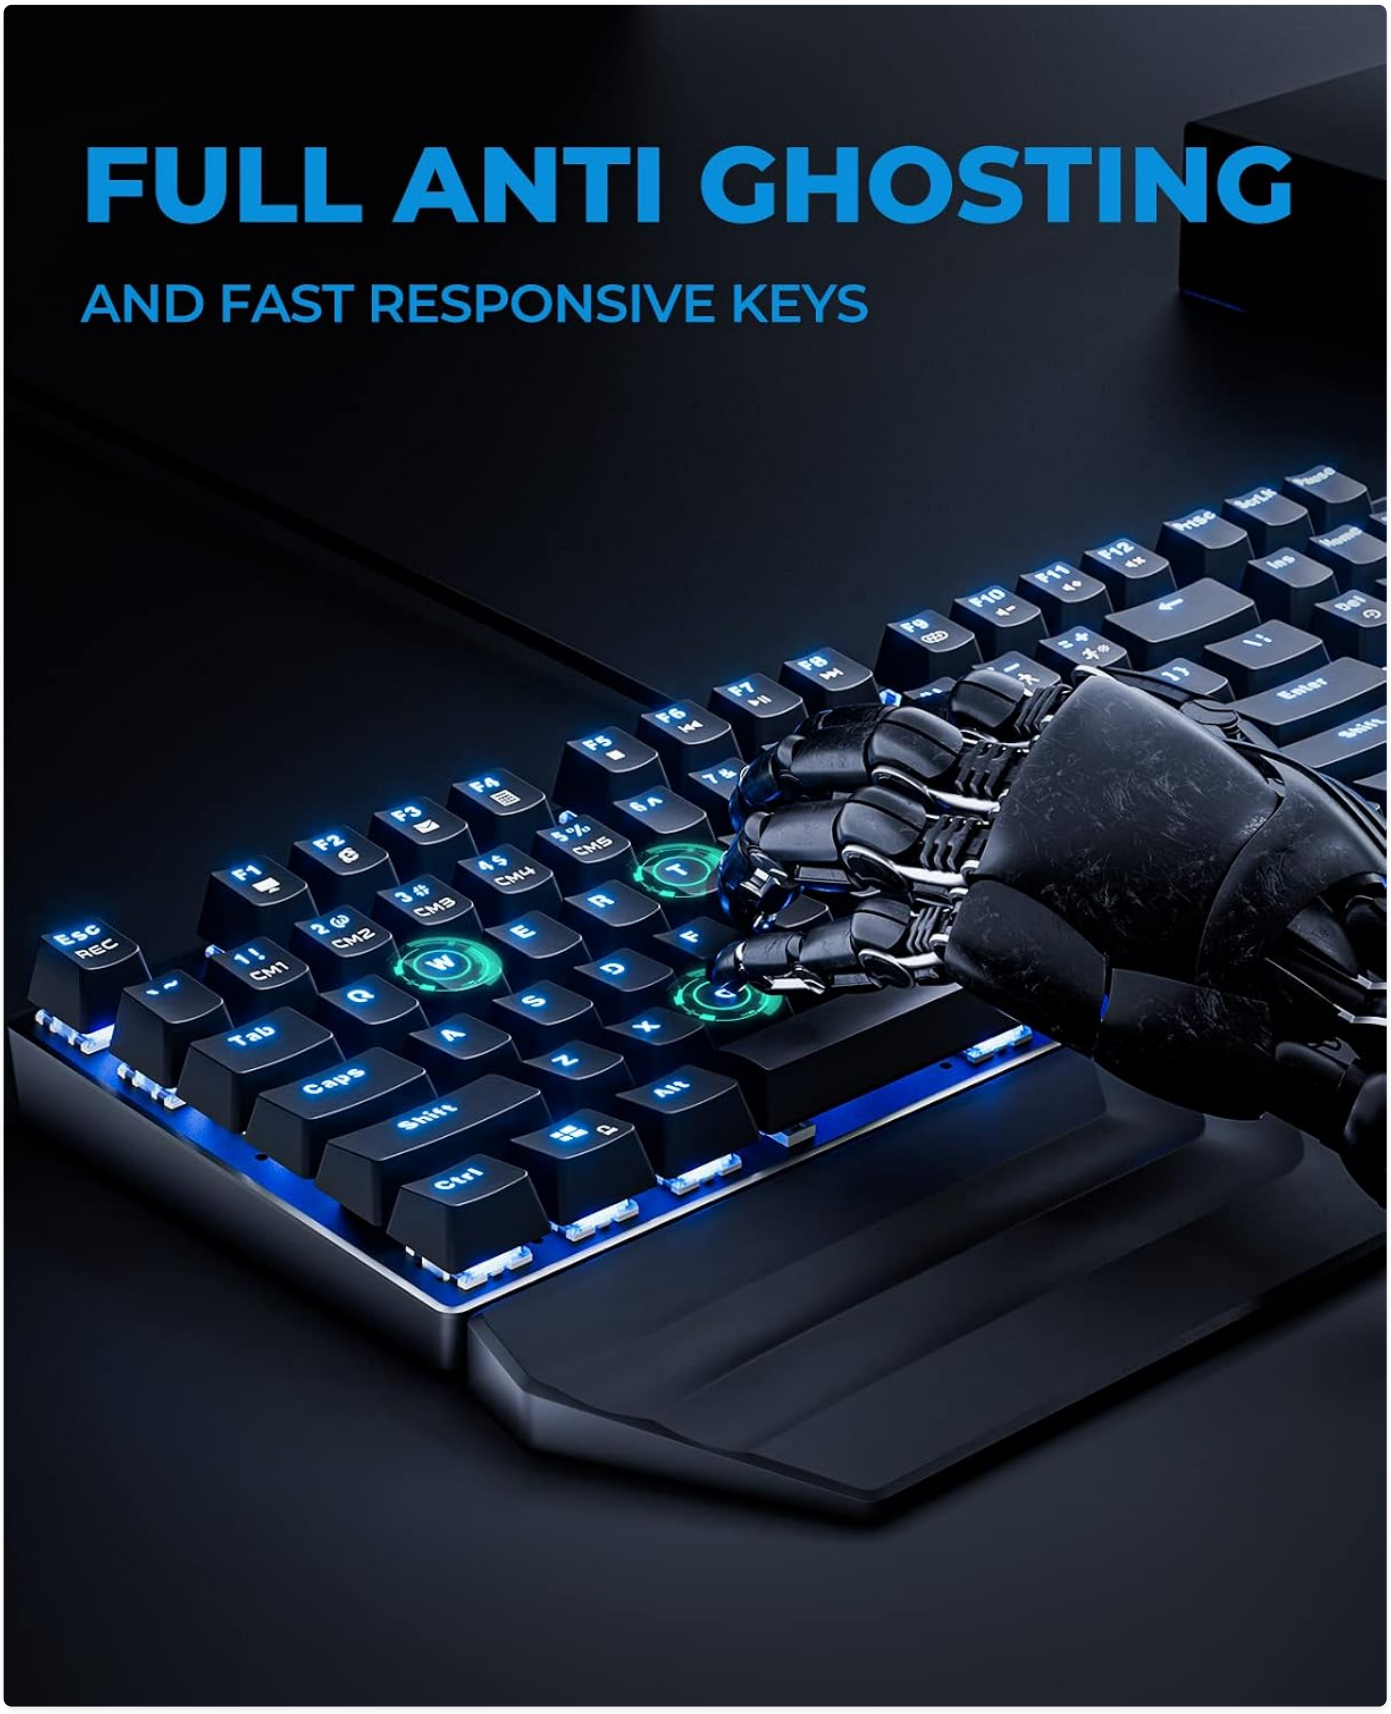


Figure 3: Keyboard showcasing full anti-ghosting capability for fast and accurate inputs.



Figure 4: Close-up view of the durable blue mechanical switches, designed for a 50 million keystroke life.

2.2 Mouse Features:

- **Adjustable DPI:** 6 adjustable Dots Per Inch (DPI) settings: 800-1600-2400-3200-4000-4800. Easily switch DPI using the dedicated button.
- **Programmable Buttons:** Customize buttons and lighting effects via downloadable software from the official havit website.
- **RGB Backlight:** 7 RGB backlight modes, including color-changeable breathing and solid modes.



Figure 5: Programmable Gaming Mouse with highlighted DPI, lighting, and macro key areas.

3. Package Contents

Please check the package contents upon unboxing to ensure all items are present:

- 1 x havit Mechanical Gaming Keyboard (HV-KB389L)
- 1 x havit Gaming Mouse

- 1 x Detachable Wrist Rest
- 1 x User Manual (this document)

4. Setup Guide

4.1 Connecting the Keyboard and Mouse:

1. Locate an available USB port on your computer.
2. Plug the USB connector of the havit Mechanical Keyboard into the USB port.
3. Plug the USB connector of the havit Gaming Mouse into another available USB port.
4. Your operating system will automatically detect and install the necessary drivers for basic functionality.

4.2 Attaching the Wrist Rest:

Align the clips on the detachable wrist rest with the corresponding slots on the bottom front edge of the keyboard. Gently push until it clicks into place.



Figure 6: Illustration of attaching the detachable wrist rest to the keyboard.

4.3 Software Installation (Optional for Advanced Features):

For advanced customization of programmable buttons and lighting effects on both the keyboard and mouse, download the official driver software from the havit website: havit.hk/downloads.

5. Operating Instructions

5.1 Keyboard Functions:

- **RGB Lighting Modes:** Cycle through 14 different lighting effects by pressing the **Fn** key combined with specific function keys (e.g., **Fn + Ins**, **Fn + Home**, etc.). Refer to the keyboard's keycaps for specific mode indicators.
- **Brightness Adjustment:** Use **Fn + Up Arrow** to increase brightness and **Fn + Down Arrow** to decrease brightness.
- **Speed Adjustment:** Use **Fn + Left Arrow** to slow down lighting effects and **Fn + Right Arrow** to speed up lighting effects.

- **Multimedia Control:** Access multimedia functions by pressing **Fn** in combination with **F1** through **F12**. For example, **Fn + F3** for Mail, **Fn + F5** for Media Player.
- **WIN Key Lock/Unlock:** Press **Fn + WIN** to lock or unlock the Windows key, preventing accidental presses during gaming.



Figure 7: Keyboard highlighting multimedia key combinations and the WIN lock/unlock function.

5.2 Mouse Functions:

- **DPI Adjustment:** Press the DPI button (usually located behind the scroll wheel) to cycle through the 6 available DPI settings (800-4800). The mouse's LED lighting will change color to indicate the current DPI level.
- **Programmable Buttons:** Utilize the havit driver software to assign custom functions, macros, or lighting effects to the mouse's programmable buttons.

5.3 Product Demonstration Video:

Your browser does not support the video tag.

Video 1: Official Havit demonstration of the Wired RGB Gaming Mechanical Keyboard and Mouse Combo, showcasing its features and lighting effects.

6. Maintenance and Care

To ensure the longevity and optimal performance of your havit keyboard and mouse combo, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to wipe down the surfaces of the keyboard and mouse. For deeper cleaning, a can of compressed air can be used to remove dust and debris from between the keycaps. Avoid using harsh chemicals or abrasive materials.
- **Spill Prevention:** While the keyboard is splash-proof, it is not waterproof. Avoid spilling liquids directly onto the device. In case of a spill, immediately disconnect the keyboard and allow it to dry completely before reconnecting.
- **Storage:** When not in use for extended periods, store the devices in a cool, dry place away from direct sunlight and extreme temperatures.

7. Troubleshooting

If you encounter any issues with your havit Mechanical Keyboard and Mouse Combo, please refer to the following common troubleshooting steps:

Problem	Possible Cause	Solution
Keyboard/Mouse not responding	Loose USB connection; Driver issue; USB port malfunction.	Ensure USB cables are securely plugged in. Try a different USB port. Restart your computer. If using advanced features, ensure software is installed correctly.
Keys not registering or double-typing	Dust/debris under keycap; Software conflict; Faulty switch.	Use compressed air to clean under keycaps. Ensure no conflicting software is running. If problem persists, contact support.
RGB lighting not working or incorrect	Incorrect lighting mode selected; Software issue.	Cycle through lighting modes using Fn key combinations. Ensure lighting software (if installed) is up-to-date and configured correctly.
Mouse tracking issues or erratic movement	Dirty sensor; Uneven surface; Incorrect DPI setting.	Clean the mouse sensor with a soft cloth. Use a clean, flat mouse pad. Adjust DPI settings using the DPI button.

If these steps do not resolve the issue, please refer to the official havit support resources or the full user manual PDF available online.

8. Specifications

Feature	Detail
Brand	havit
Model Number	HV-KB389L
Product Dimensions	17 x 8.1 x 2.1 inches (Keyboard); 2.8 Pounds (Total Weight)
Connectivity Technology	Wired USB
Keyboard Switch Type	Blue Mechanical Switches
Keyboard Features	RGB Backlit, Detachable Wrist Rest, Anti-Ghosting (105 keys), Multimedia Keys, WIN Key Lock
Mouse DPI Settings	800-1600-2400-3200-4000-4800 DPI
Mouse Features	Programmable Buttons, RGB Backlight
Compatible Devices	Personal Computer
Color	Black

9. Warranty and Support

havit products are manufactured with high-quality standards. For warranty information and technical support, please contact havit customer service directly or visit their official website.

You can also refer to the official User Manual (PDF) for additional details:

Download User Manual (PDF)

For further assistance, please visit the havit Store on Amazon:havit Store

© 2024 havit. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question