Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Club 3D CSV-1564

Club 3D CSV-1564 USB C 3.2 Gen1 Universal Triple 4K Charging Dock User Manual

Model: CSV-1564 | Brand: Club 3D

Introduction

This manual provides instructions for the Club 3D CSV-1564 USB C 3.2 Gen1 Universal Triple 4K Charging Dock. This device is designed to expand the connectivity of your notebook, tablet, or smartphone, offering multiple display outputs, USB ports, network connectivity, and power delivery through a single USB Type-C connection.

Please read this manual thoroughly before using the product to ensure proper operation and to prevent damage.

Package Contents

Verify that all items are present in the package:

- 1 x Club 3D CSV-1564 USB C 3.2 Gen1 Universal Triple 4K Charging Dock
- (Additional items such as power adapter, USB-C cable, or documentation may be included depending on the specific retail package.)

Product Overview

The Club 3D CSV-1564 docking station provides a comprehensive solution for expanding your device's capabilities. It features a variety of ports for video output, data transfer, network connectivity, and power delivery.

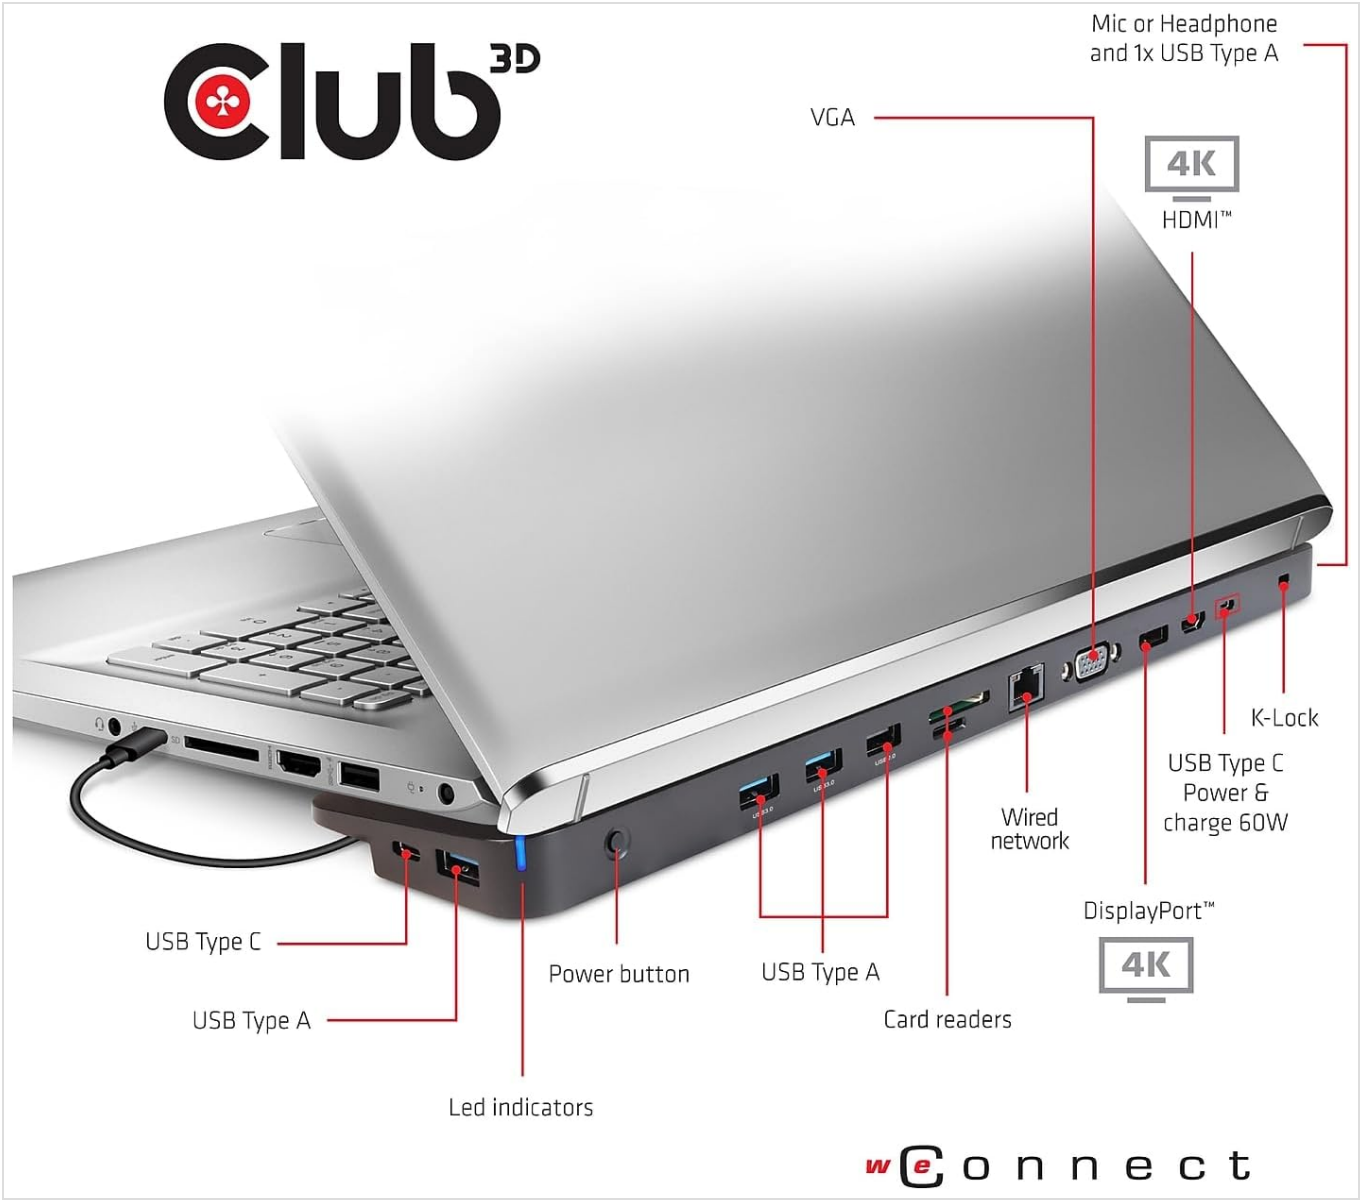


Image: Overview of the Club 3D CSV-1564 docking station with labeled ports and indicators. This diagram illustrates the location of the USB Type-C input, USB Type-A ports, card readers, wired network port, DisplayPort, HDMI port, VGA port, K-Lock slot, power button, and LED indicators.

Key Features:

- **Host Interface:** USB 3.2 (Gen 1) Type C
- **Video Outputs:** HDMI, DisplayPort, VGA (supports triple display configurations)
- **USB Ports:** 6 x USB ports (various types, including USB 3.0 and USB 2.0)
- **Network:** RJ-45 Ethernet port
- **Audio:** Audio Line Out, Microphone input
- **Power Delivery:** Up to 60W charging for host device
- **Card Readers:** Integrated card reader slots

Setup Instructions

Follow these steps to set up your Club 3D CSV-1564 docking station:

1. **Connect Power:** Connect the power adapter (if included) to the DC-in port on the docking station and then to a power outlet. The power LED indicator on the dock should illuminate.
2. **Connect to Host Device:** Use the integrated USB Type-C cable from the docking station to connect to the USB Type-C port on your notebook, tablet, or smartphone. Ensure your host device's USB-C port supports DisplayPort Alternate Mode and Power Delivery for full functionality.



Image: The underside of the docking station showing the integrated USB-C cable routed for connection to a host device. This design helps with cable management.

3. **Connect External Displays:** Connect your monitors to the HDMI, DisplayPort, and/or VGA ports on the docking station using appropriate cables.
4. **Connect Peripherals:** Connect your USB devices (keyboard, mouse, external drives), Ethernet cable, and audio devices to the corresponding ports on the docking station.



Image: The Club 3D CSV-1564 docking station connected to a laptop, demonstrating how it integrates with a workstation setup. Peripherals such as external monitors, USB devices, and network cables would connect to the dock.

5. **Driver Installation (if necessary):** In most cases, the docking station will be plug-and-play. However, if your operating system does not automatically install the necessary drivers, visit the Club 3D support website for driver downloads.

Operating Instructions

Once set up, the docking station operates automatically with your connected device.

- **Power Delivery:** The docking station will provide up to 60W of power to your connected host device, charging it while in use.
- **Display Configuration:** Your operating system's display settings can be used to configure external monitors (extend, duplicate, or primary display). Refer to your operating system's documentation for detailed instructions on display management.
- **Data Transfer:** USB ports and card readers function as standard data transfer interfaces.
- **Network Connectivity:** The RJ-45 port provides a wired Ethernet connection to your host device.

Maintenance

Proper maintenance ensures the longevity and optimal performance of your docking station.

- **Cleaning:** Use a soft, dry cloth to clean the exterior of the docking station. Do not use liquid cleaners or abrasive materials.
- **Storage:** Store the docking station in a cool, dry place away from direct sunlight and extreme temperatures.
- **Cable Care:** Avoid bending or twisting cables excessively. Ensure connections are secure but do not force them.

Troubleshooting

If you encounter issues with your docking station, refer to the following common solutions:

- **No Display Output:**
  - Ensure the docking station is powered on and properly connected to your host device's USB-C port.
  - Verify that your host device's USB-C port supports DisplayPort Alternate Mode.
  - Check all display cables for secure connections.
  - Try updating your graphics drivers on your host device.
  - Test with a different display cable or monitor if possible.
- **Host Device Not Charging:**
  - Ensure the docking station's power adapter is securely connected and functioning.
  - Verify that your host device's USB-C port supports Power Delivery.
  - Check if your host device requires more than 60W of power; if so, it may charge slower or not at all while in heavy use.
- **USB Devices Not Recognized:**
  - Reconnect the USB device to a different port on the docking station.
  - Ensure the docking station is properly connected to the host device.
  - Try connecting the USB device directly to the host device to rule out device issues.
- **No Network Connection:**
  - Check the Ethernet cable connection to both the dock and your router/modem.
  - Verify network settings on your host device.
  - Restart your router/modem and host device.

Specifications

Model Number	CSV-1564
Brand	Club 3D
Host Interface	USB 3.2 (Gen 1) Type C

Connectivity Technology	Wired
Device Supported	Notebook, Tablet, Smartphone
Video Outputs	1 x HDMI, 1 x DisplayPort, 1 x VGA
Total USB Ports	6
Network	RJ-45 Ethernet
Audio	Audio Line Out, Microphone Input
Power Delivery	Up to 60W
Product Dimensions	9.8 x 3.3 x 1.3 inches (24.9 x 8.4 x 3.3 cm)
Item Weight	15.1 ounces (428 grams)
UPC	841615101511

Warranty and Support

Club 3D products are designed for reliability and performance. For information regarding warranty coverage, technical support, or to download the latest drivers and firmware, please visit the official Club 3D website or contact their customer support directly.

Official Website: www.club-3d.com

© 2024 Club 3D. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B082B64NX3

More documents and user manuals: **https://manuals.plus/**