Manuals+

Q & A | Deep Search | Upload

manuals.plus /

- Logitech /
- > Logitech MX Keys Advanced Wireless Illuminated Keyboard for Mac User Manual

Logitech 920-009552

Logitech MX Keys Advanced Wireless Illuminated Keyboard for Mac

Model: 920-009552

1. Introduction

The Logitech MX Keys Advanced Wireless Illuminated Keyboard for Mac is designed for seamless integration with macOS, iPadOS, and iOS devices. This full-size keyboard features a Mac key layout, spherically-dished keys for comfortable typing, and dynamic backlighting that adjusts to ambient light. It offers multi-device connectivity, allowing you to switch between up to three devices with ease, and can follow a Flow-enabled mouse for a fluid multi-computer workflow. The keyboard is built with a metal construction for stability and precision, and recharges via a USB-C to USB-C cable.



Image: The Logitech MX Keys Advanced Wireless Illuminated Keyboard for Mac, showcasing its full-size layout and Space Grey finish.

2. SETUP

2.1 What's in the Box

Upon unboxing your Logitech MX Keys for Mac, you will find the following components:

- Logitech MX Keys Advanced Wireless Illuminated Keyboard for Mac
- · Logitech Unifying USB Receiver
- USB-C to USB-C Charging Cable (1 meter)
- User Documentation

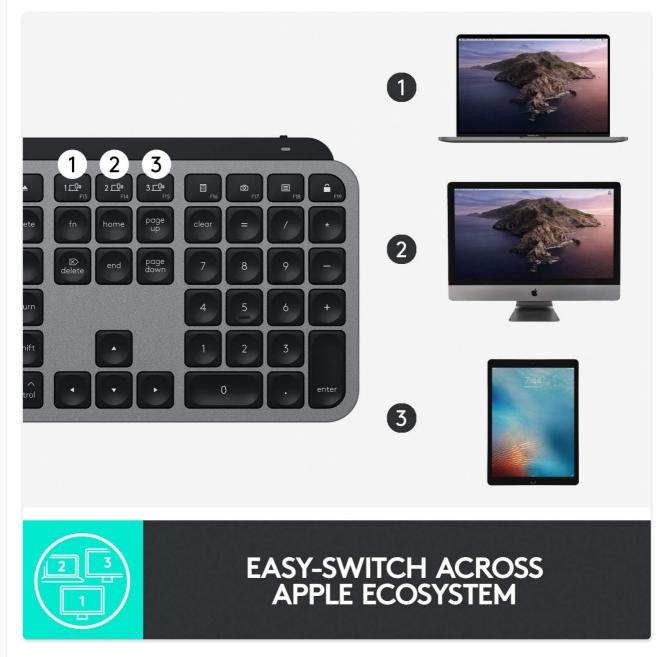


Image: A diagram illustrating the contents included in the Logitech MX Keys for Mac packaging, including the keyboard, USB receiver, and charging cable.

2.2 Initial Charging

Before first use, it is recommended to fully charge your keyboard. Connect the supplied USB-C to USB-C charging cable to the keyboard's USB-C port and to a compatible USB-C power source (e.g., your Mac, a wall adapter). A full charge can last up to 10 days with backlighting on, or up to 5 months with backlighting off.





SMART BACKLIGHTING ADJUSTS TO ENVIRONMENT

Image: A close-up of the Logitech MX Keys for Mac showing the USB-C charging port and the USB-C to USB-C cable connected.

2.3 Connecting Your Keyboard

The MX Keys for Mac offers two primary connection methods: Bluetooth Low Energy and the Logitech Unifying USB Receiver.

1. Bluetooth Connection:

- Turn on the keyboard using the power switch on the top right edge.
- Press and hold one of the Easy-Switch keys (F1, F2, or F3) for three seconds until the LED indicator on the key starts blinking rapidly. This indicates pairing mode.
- On your Mac or iPad, go to System Settings (or System Preferences) > Bluetooth and select "MX Keys for Mac" from the list of available devices.
- Follow any on-screen prompts to complete the pairing.

2. Logitech Unifying USB Receiver Connection:

- Plug the Unifying USB receiver into an available USB-A port on your Mac.
- Turn on the keyboard. It should automatically connect to the receiver.

 For advanced setup and customization, download and install the Logitech Options software from the official Logitech website.

3. OPERATING THE KEYBOARD

3.1 Key Features


The MX Keys for Mac is designed for an optimal typing experience:

- **Perfect Stroke Keys:** Spherically-dished keys are contoured to match the shape of your fingertips, providing a comfortable and precise typing experience.
- Smart Illumination: The backlighting automatically adjusts to ambient lighting conditions and illuminates when your hands approach the keyboard, saving battery life.
- Multi-Computer Control (Flow): When paired with a Flow-enabled Logitech mouse (e.g., MX Master 3 for Mac), the keyboard can seamlessly switch between multiple Mac computers by simply moving your mouse cursor from one screen to another.



MAC KEY LAYOUT IN SPACE GRAY FINISH

Image: A close-up view of the Logitech MX Keys, highlighting the spherically-dished Perfect Stroke keys designed for comfortable and precise typing.

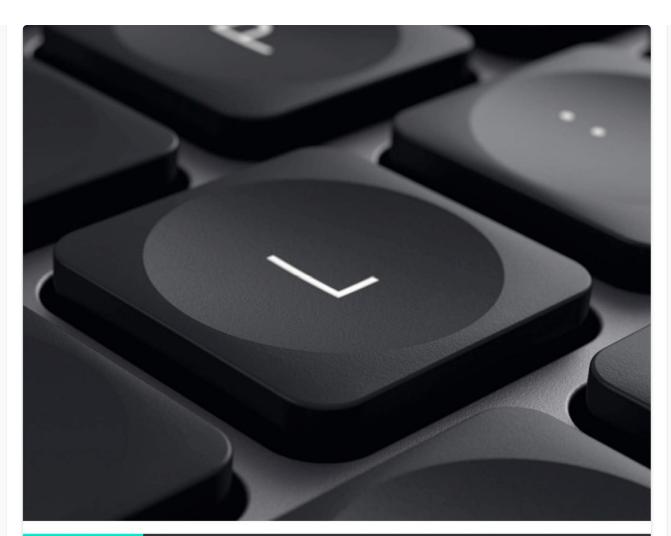



PERFECT STROKE KEYS FLUID, EFFICIENT, RESPONSIVE

Image: The Logitech MX Keys keyboard with its smart backlighting activated in a dimly lit setting, demonstrating how the keys illuminate.

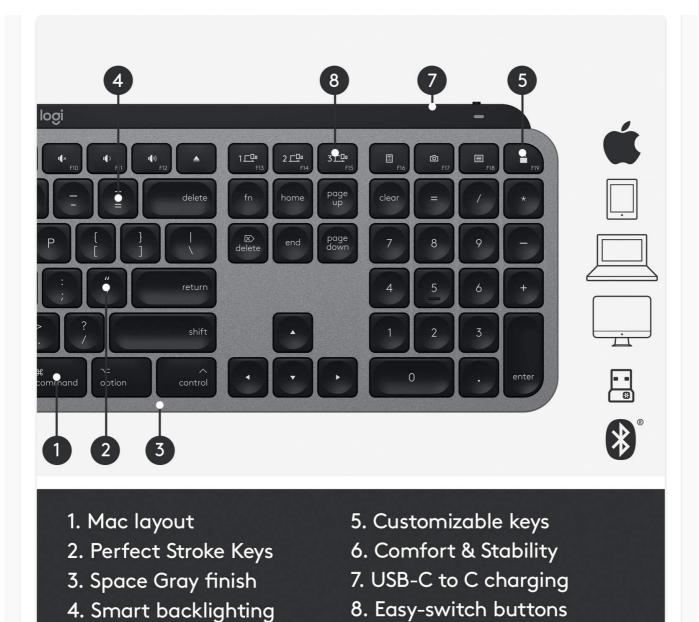


Image: An illustration of the Logitech Flow feature, showing how the MX Keys can be used to type across multiple computers (laptop and desktop) seamlessly.

3.2 Customizable Keys and Easy-Switch


4. Smart backlighting

The MX Keys for Mac features a row of Fn keys that can be customized using the Logitech Options software. This allows you to assign specific functions or shortcuts to these keys to enhance your workflow.

The Easy-Switch buttons (F1, F2, F3) located on the top row allow you to quickly switch between up to three paired devices. Simply press the desired Easy-Switch button to connect to the corresponding device.



Image: A detailed diagram of the Logitech MX Keys for Mac, labeling key features such as Mac layout, Perfect Stroke Keys, Space Gray finish, Smart backlighting, Customizable keys, Comfort & Stability, USB-C to C charging, and Easy-Switch buttons.

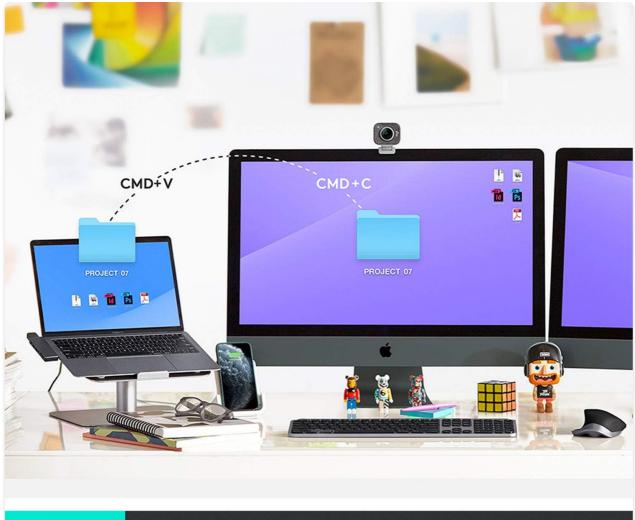



TYPE ON MULTIPLE COMPUTERS IN ONE FLOW

Image: A visual representation of the Easy-Switch functionality, showing the keyboard connected to a MacBook Pro, an iMac, and an iPad, allowing seamless switching between them.

3.3 Product Overview Video

Watch this official product video for a quick overview of the Logitech MX Keys for Mac's features and design.

Video: An official product video showcasing the Logitech MX Keys for Mac, highlighting its design and key functionalities.

4. MAINTENANCE

To ensure the longevity and optimal performance of your Logitech MX Keys for Mac, follow these maintenance guidelines:

- Cleaning: Use a soft, lint-free cloth to wipe down the keyboard surface. For deeper cleaning, a slightly damp cloth with mild soap can be used, ensuring no liquid enters the key switches or internal components. Avoid abrasive cleaners or solvents.
- **Battery Care:** While the keyboard has a long battery life, avoid completely draining the battery frequently. Recharge it when the battery indicator glows red or when prompted by Logitech Options.

Store the keyboard in a cool, dry place if not in use for extended periods.

• **Storage:** When transporting or storing the keyboard, ensure it is placed in a protective sleeve or case to prevent scratches and damage to the keys or body.

5. TROUBLESHOOTING

If you encounter issues with your Logitech MX Keys for Mac, refer to the following common troubleshooting steps:

5.1 Connectivity Issues

- **Keyboard not connecting:** Ensure the keyboard is turned on and fully charged. Check that Bluetooth is enabled on your device or that the Unifying receiver is securely plugged in. Try re-pairing the keyboard by holding an Easy-Switch key until it blinks and re-selecting it in your device's Bluetooth settings.
- Intermittent connection: Move the keyboard closer to your device or Unifying receiver to reduce interference. Avoid placing the keyboard near other wireless devices that might cause signal disruption.

5.2 Backlighting Problems

- **Backlight not working:** Ensure the keyboard has sufficient charge. The backlighting automatically adjusts based on ambient light; try using it in a darker environment to see if it activates. Check Logitech Options software for backlight settings.
- **Backlight too dim/bright:** Adjust the backlight intensity using the dedicated keys on the keyboard (F5 and F6) or through the Logitech Options software.

5.3 Charging Issues

- **Keyboard not charging:** Verify that the USB-C cable is properly connected to both the keyboard and the power source. Try a different USB-C port or power adapter. Ensure the cable itself is not damaged.
- **Battery indicator not accurate:** Allow the keyboard to fully charge and discharge a few times to recalibrate the battery indicator. If issues persist, contact Logitech support.

6. Specifications

Feature	Detail
Brand	Logitech
Model Name	MX Keys For Mac
Item Model Number	920-009552
Connectivity Technology	Bluetooth, USB Unifying Receiver
Compatible Devices	MacBook Pro, MacBook Air, iMac, iPad (macOS 10.15 & later, iPadOS 13.4 & later, iOS 9 & later)
Keyboard Description	Wireless, QWERTY, Full Size

Special Features	Hand Proximity Detection, Rechargeable Battery, Integrated Backlighting, Ambient Light Sensor, On/Off Switch, Battery Indicator
Color	Space Grey
Number of Keys	104
Item Weight	1.79 pounds
Product Dimensions	17.7 x 5.7 x 1.6 inches
Power Source	Battery Powered (1 Lithium Polymer battery included)
Battery Life	Up to 10 days (with backlighting), up to 5 months (backlighting off)

7. WARRANTY AND SUPPORT

Logitech products are designed for reliability and performance. For detailed warranty information, please refer to the warranty card included with your product or visit the official Logitech support website.


For further assistance, technical support, or to download the latest Logitech Options software and user manuals, please visit the Logitech support page:

Logitech Support Website

A comprehensive User Manual in PDF format is also available for download:

Download User Manual (PDF)

Related Documents - 920-009552

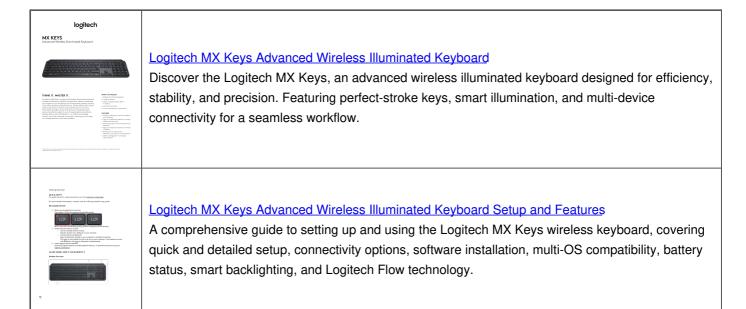



Logitech MX Mechanical Mini: Getting Started Guide

A concise guide to setting up and using the Logitech MX Mechanical Mini keyboard, covering connection methods, software, smart backlighting, and Logitech Flow.



Logitech MX Master 3S Mouse and MX Keys Keyboard User Guide

Comprehensive guide for setting up and using the Logitech MX Master 3S wireless mouse and MX Keys wireless keyboard, covering features, software, and troubleshooting.



Logitech MX Keys Advanced Wireless Keyboard Setup and Features Guide

A comprehensive guide to setting up and using the Logitech MX Keys Advanced Wireless Illuminated Keyboard, covering quick setup, detailed setup, pairing, software installation, multi-OS compatibility, battery status, smart backlighting, and Logitech Flow.



Logitech MX Mechanical Mini Getting Started Guide

A comprehensive guide to setting up and using the Logitech MX Mechanical Mini keyboard, including connection options, software installation, backlighting features, and multi-device functionality.