

[manuals.plus](#) /› [FMOUSE](#) /› [FMOUSE M113 Wireless Bluetooth Mouse User Manual](#)

FMOUSE M113

FMOUSE M113 Wireless Bluetooth Mouse User Manual

Model: M113

INTRODUCTION

Thank you for choosing the FMOUSE M113 Wireless Bluetooth Mouse. This manual provides detailed instructions for setting up, operating, and maintaining your new mouse. Please read it carefully to ensure optimal performance and longevity of your device.

PRODUCT OVERVIEW

The FMOUSE M113 is a slim, rechargeable wireless mouse designed for versatility and convenience. It offers dual-mode connectivity (2.4G USB receiver and Bluetooth 5.1), multiple programmable buttons, adjustable DPI settings, and a silent click design.

Your browser does not support the video tag.

Video: Overview of FMOUSE M113 Wireless Mouse features, including connectivity, charging, and special buttons.

Slim and Portable



Image: The FMOUSE M113 mouse showcasing its slim profile and compact dimensions (113mm length, 57mm width, 25mm height).

PACKAGE CONTENTS

Please check the package for the following items:

- FMOUSE M113 Wireless Mouse
- USB Charging Cable (Type-C, 80cm/31.5in)
- USB Receiver (2.4G)
- Instruction Manual

What you get?





FMOUSE M113



USB charging cable
80cm / 31.5inch



USB receiver

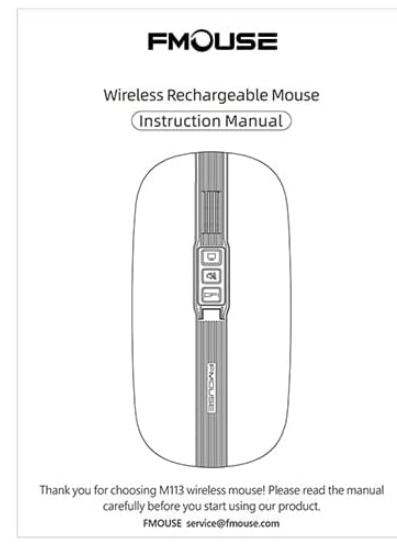

Thank you for choosing M113 wireless mouse! Please read the manual carefully before you start using our product.
FMOUSE service@fmouse.com

Instruction manual

Image: Contents of the FMOUSE M113 package, including the mouse, USB charging cable, USB receiver, and instruction manual.

CHARGING THE MOUSE

The FMOUSE M113 features a built-in rechargeable Lithium-Ion battery. Before first use, it is recommended to fully charge the mouse.

1. Locate the Type-C charging port at the front of the mouse.
2. Connect the provided USB Type-C charging cable to the mouse and the other end to a USB power source (e.g., computer USB port, USB wall adapter).
3. During charging, the scroll wheel light will illuminate red.
4. Once fully charged, the scroll wheel light will turn off.
5. If the battery is low, the scroll wheel light will flash red.

Type-C Rechargeable Mouse



Image: Visual guide for charging the FMOUSE M113 mouse, showing the Type-C port and light indicators for charging (red light), fully charged (light off), and low battery (flashing red).

CONNECTION OPTIONS

The FMOUSE M113 supports dual-mode connectivity: 2.4G wireless via USB receiver and Bluetooth 5.1. You can connect to two different devices simultaneously.

2 Options Connection



Image: Diagram illustrating the two connection methods for the FMOUSE M113: 2.4G USB receiver for one device and Bluetooth for another, with indicators for successful connection.

2.4G USB Receiver Connection

1. Locate the USB receiver stored in the magnetic slot on the underside of the mouse.
2. Plug the USB receiver into an available USB port on your computer.
3. Turn on the mouse using the ON/OFF switch on the bottom.
4. Switch the mode selector on the bottom of the mouse to the 2.4G icon (usually indicated by a small antenna symbol).
5. The mouse should connect automatically.

Bluetooth Connection

1. Turn on the mouse using the ON/OFF switch on the bottom.
2. Switch the mode selector on the bottom of the mouse to the Bluetooth icon.
3. On your device (MacBook, iPad, Laptop, etc.), go to Bluetooth settings.
4. Search for new devices and select "FMOUSE M113" (or similar name) from the list.
5. Pair the device. The mouse should now be connected via Bluetooth.

OPERATING INSTRUCTIONS

Power On/Off

Use the ON/OFF switch located on the underside of the mouse to power it on or off. Turning off the mouse when not in use helps conserve battery life.

DPI Adjustment

The mouse features 4 adjustable DPI levels (800/1200/1600/2400) to customize cursor sensitivity. Press the **DPI button** (located near the scroll wheel) to cycle through the settings. The color of the scroll wheel light indicates the current DPI level.

- **800 DPI:** (Color indicator may vary, refer to image)
- **1200 DPI:** (Color indicator may vary, refer to image)
- **1600 DPI:** (Color indicator may vary, refer to image)
- **2400 DPI:** (Color indicator may vary, refer to image)

To turn off the roller light, long press the DPI button for 2 seconds.



Long press 2 seconds to turn on/off the roller light.

Image: Illustration of the 4 adjustable DPI levels (800, 1200, 1600, 2400) and how the scroll wheel light changes color to indicate the current setting.

Desktop Return Button

The dedicated **Desktop Return button** (located near the scroll wheel) allows for a quick return to your computer's home page with a single click. This feature enhances privacy and workflow efficiency.

Desktop Return Button



Image: The Desktop Return button on the FMOUSE M113, demonstrating its function to instantly minimize all windows and return to the desktop.

Mute Button and Volume Control

The **Mute button** (located near the scroll wheel) provides instant control over your computer's volume.

- **Single Press:** Press the mute button once to instantly set your computer's volume to zero (mute).
- **Long Press and Scroll:** Long press the mute button for 2 seconds, then move the scroll wheel up or down to adjust the volume level.

Quiet Button

You can instantly control the volume of your computer according to the scene.



When you press the silent button, the volume of your computer becomes zero



Press for 2 seconds



Move the scroll



You can adjust the volume of your computer



Image: Visual guide demonstrating the mute button's functionality for instant muting and for adjusting volume by long-pressing and scrolling.

Silent Click Feature

The FMOUSE M113 is designed with silent click buttons, significantly reducing click noise. This makes it suitable for quiet environments such as libraries, offices, or late-night use, minimizing disturbance to others.

Silent Mouse

It can be used safely even in places such as libraries and offices, even at midnight, so as not to disturb others.

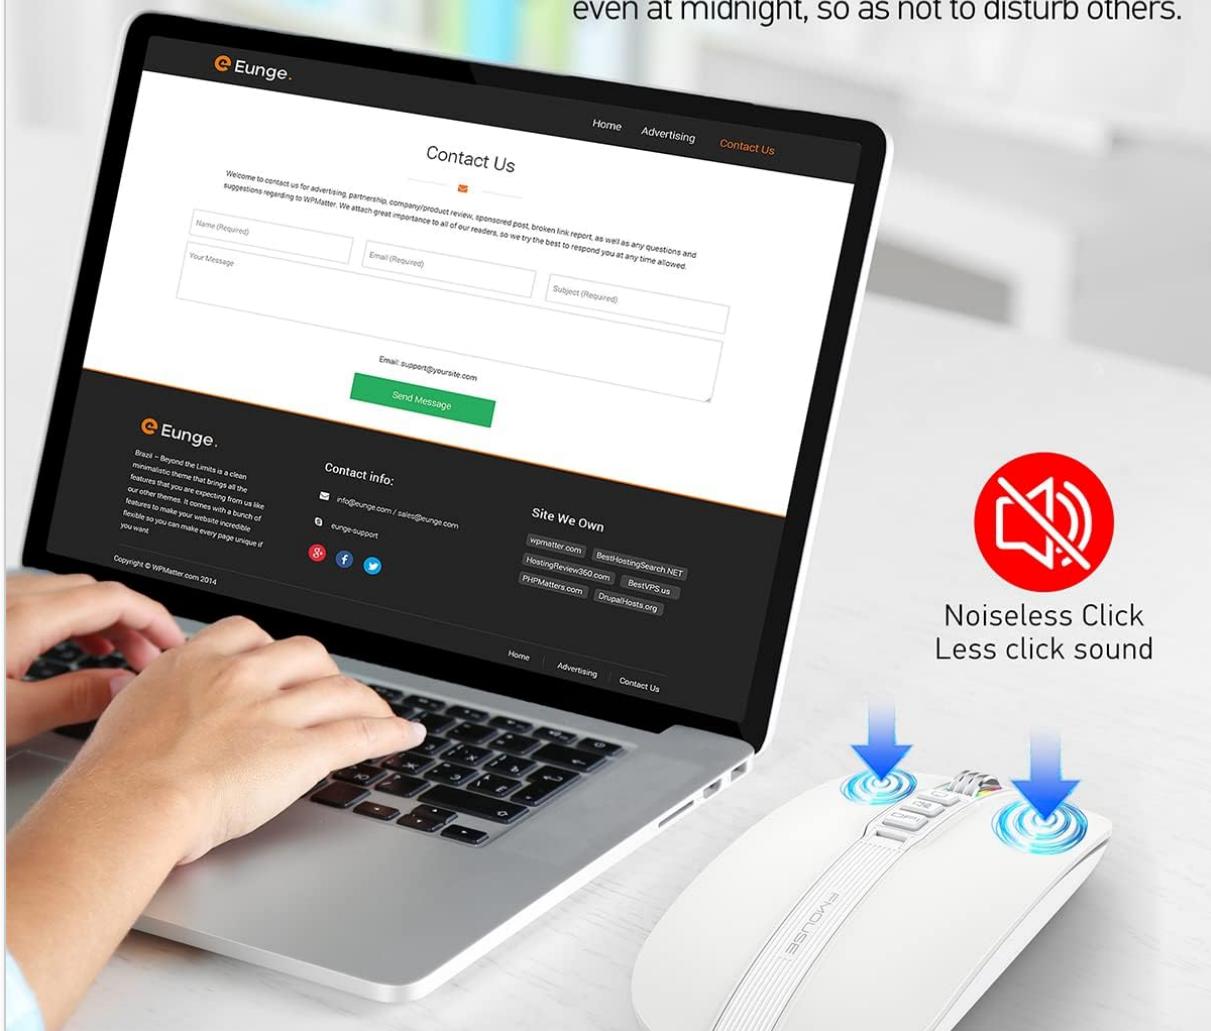


Image: Depiction of the FMOUSE M113 highlighting its noiseless click feature, indicating reduced sound output during use.

SPECIFICATIONS

Feature	Detail
Model	M113
Connectivity Technology	Bluetooth 5.1, 2.4G USB Wireless
DPI Levels	800 / 1200 / 1600 / 2400
Special Features	One-click DPI adjustment, One-click access to desktop, One-click muting, Three shortcut keys
Movement Detection	Optical
Battery Type	Rechargeable Lithium Ion
Charging Port	USB Type-C

Feature	Detail
Product Dimensions	4.45 x 2.24 x 0.98 inches (113 x 57 x 25 mm)
Item Weight	2.4 ounces (68 grams)
Compatibility	Windows, macOS, iPadOS, ChromeOS, Linux

TROUBLESHOOTING

- **Mouse not connecting:**

Ensure the mouse is powered on. Check the connection mode switch (2.4G or Bluetooth) on the bottom of the mouse. For 2.4G, ensure the USB receiver is securely plugged in. For Bluetooth, ensure Bluetooth is enabled on your device and the mouse is paired correctly. Try restarting both the mouse and your device.

- **Cursor movement is erratic or slow:**

Adjust the DPI settings using the DPI button. Ensure the mouse is on a clean, non-reflective surface. Check battery level and recharge if necessary.

- **Mouse not charging:**

Ensure the Type-C cable is properly connected to both the mouse and the power source. Try a different USB port or charging cable. Check if the charging indicator light is on.

- **Buttons not responding:**

Check if the mouse is connected. Ensure no debris is obstructing the buttons. If the issue persists, try reconnecting the mouse.

WARRANTY AND SUPPORT

FMOUSE products are designed for reliability and performance. For warranty information or technical support, please refer to the contact details provided with your purchase documentation or visit the official FMOUSE website. Please retain your proof of purchase for warranty claims.