Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

FELICON K65 Pro

FELICON K65 Pro 60% Gaming Keyboard and Mouse Combo User Manual

Model: K65 Pro

1. Introduction

Thank you for choosing the FELICON K65 Pro 60% Gaming Keyboard and Mouse Combo. This compact and high-performance set is designed to enhance your gaming and productivity with its mechanical switches, customizable RGB lighting, and ergonomic design. This manual provides detailed instructions for setup, operation, maintenance, and troubleshooting to ensure you get the most out of your new peripheral set.



Image 1.1: The FELICON K65 Pro 60% Gaming Keyboard and Mouse Combo, featuring the compact keyboard, ultralight honeycomb mouse, and included mouse pad.

2. Package Contents

Please verify that all items listed below are included in your package:

- 1 x FELICON K65 Pro 60% Gaming Keyboard
- 1 x Ultralight Honeycomb Optical Gaming Mouse
- 1 x Gaming Mouse Pad
- 1 x USB Type-C Cable (for keyboard connection)
- 1 x Keycap Puller
- Additional Keycaps (may vary by package)



Image 2.1: Included keycap puller and an example of the mechanical red switch, demonstrating the ease of keycap removal.

3. Setup

The K65 Pro combo is designed for plug-and-play functionality, requiring no additional drivers for basic operation.

3.1 Connecting the Keyboard

1. Locate the USB Type-C port on the keyboard.
2. Connect one end of the provided USB Type-C cable to the keyboard.
3. Connect the other end of the USB cable to an available USB port on your computer or gaming console.
4. The keyboard's backlight will illuminate upon successful connection.

3.2 Connecting the Mouse

1. Connect the USB cable of the mouse to an available USB port on your computer or gaming console.
2. The mouse's RGB lighting will illuminate upon successful connection.

3.3 Compatibility

The K65 Pro combo is compatible with a wide range of operating systems and devices:

- Windows 2000/XP/Vista/ME/Windows 7/10
- MAC OS
- Gaming Consoles (PS4, PS5, Xbox One, Xbox Series X/S) -**Note:** An adapter may be required to convert the signal for full functionality with some consoles.



Image 3.1: The K65 Pro combo is widely compatible with various platforms including PC, Mac OS, and gaming consoles.

4. Operating Instructions

4.1 Keyboard Functions

4.1.1 Backlight Control

The keyboard features 19 cool lighting effects. Use the following key combinations to control the backlight:

- **FN +** | **keys:** Switch between different backlight modes.
- **FN + [{}] keys:** Adjust backlight brightness (5 levels).
- **FN + [+-] keys:** Adjust backlight speed (5 levels).
- **Long press FN:** Toggle backlight on/off.



Image 4.1: The keyboard's LED Rainbow Backlight illuminates the keys, enhancing the gaming and typing experience.



Image 4.2: Visual guide for adjusting backlight brightness, speed, and switching modes using the FN key combinations.

4.1.2 Multimedia Functions

Access multimedia controls by pressing the **FN** key in combination with the corresponding function keys:

Key Combination	Function
FN + F1	Media Player
FN + F2	Volume -
FN + F3	Volume +
FN + F4	Mute
FN + F5	Previous Track
FN + F6	Next Track
FN + F7	Play/Pause
FN + F8	CD Stop
FN + F9	Web Home
FN + F10	E-mail
FN + F11	My Computer
FN + F12	Favorites

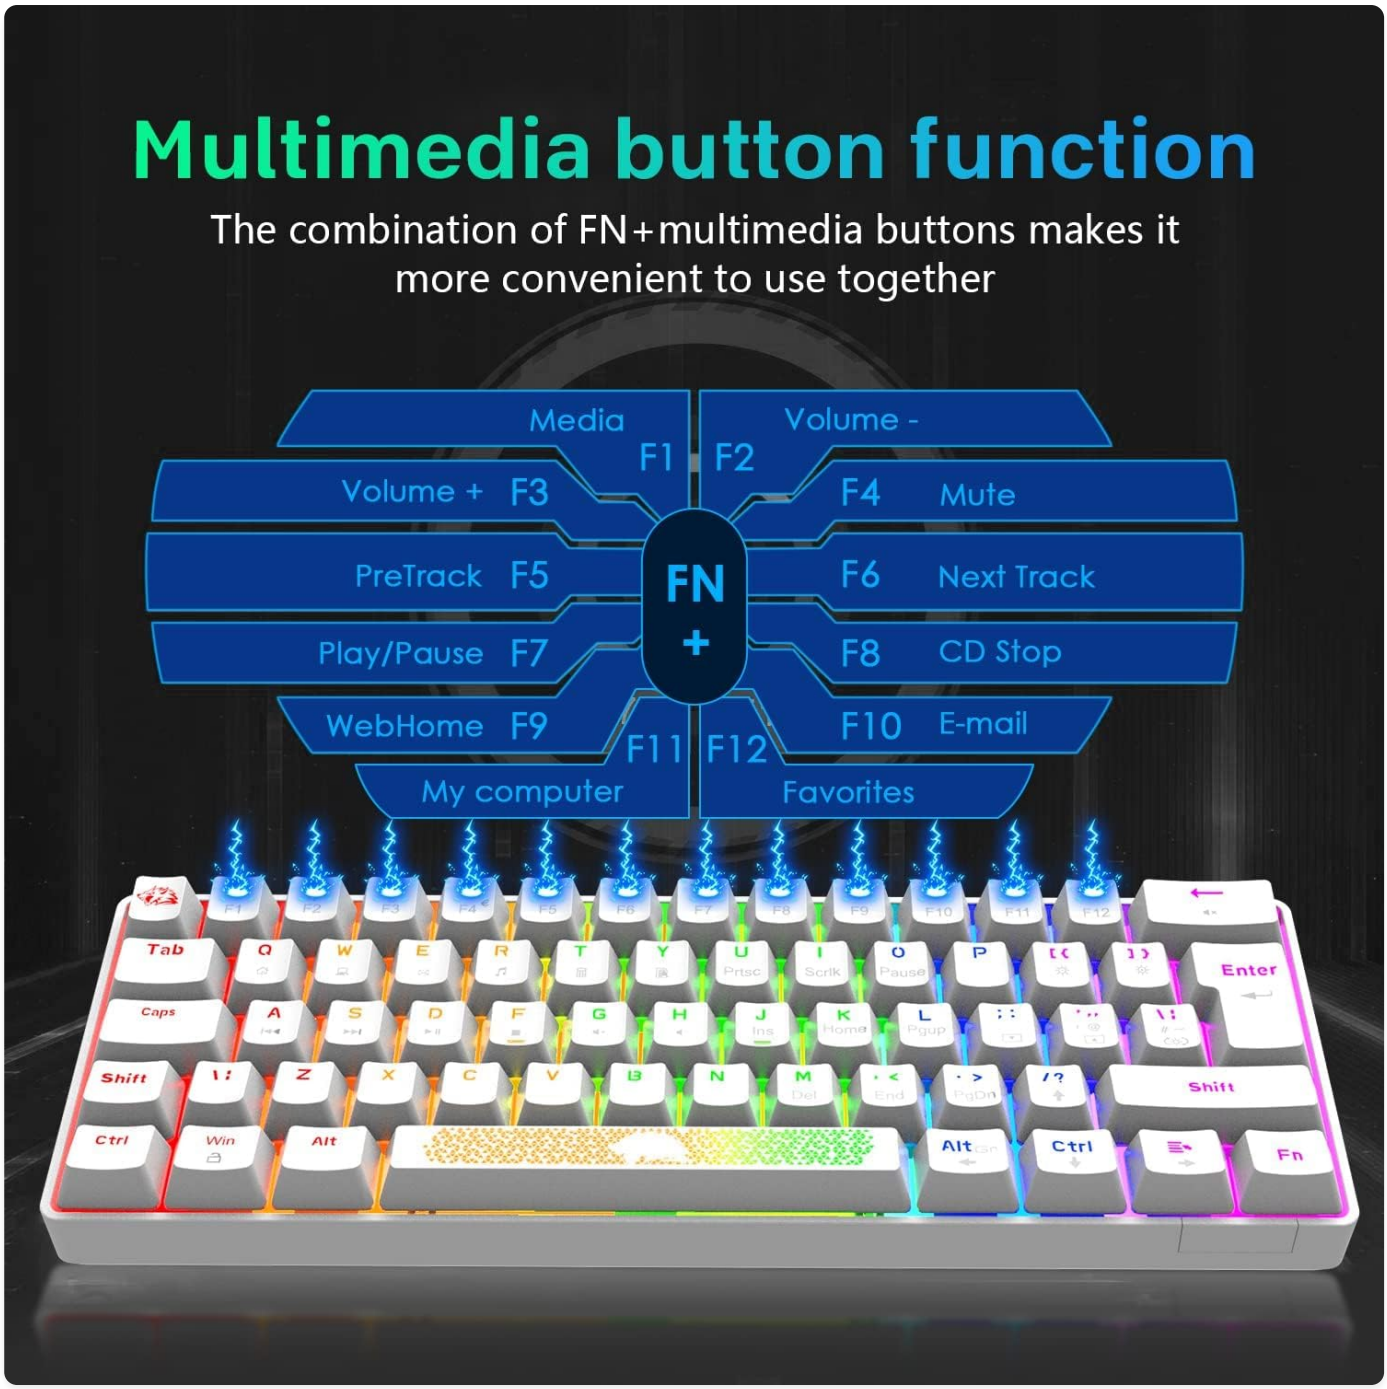


Image 4.3: Diagram illustrating the FN key combinations for various multimedia and system functions.

4.1.3 WIN Key Lock

To prevent accidental presses during gaming, the WIN key can be disabled. Refer to the keyboard's specific key combination for this function, often **FN + WIN key**.

4.2 Mouse Functions

4.2.1 DPI Adjustment

The mouse features adjustable DPI settings up to 6400 DPI, with 6 customizable levels. Use the DPI button on the mouse to cycle through the preset DPI levels. The current DPI level is often indicated by the mouse's RGB lighting color.

- **DPI Levels:** 800, 1200, 1600, 2400, 3200, 4800, 6400 (editable via software).



Image 4.4: The gaming mouse with its adjustable DPI settings, showing the range from 1200 to 6400 DPI.

4.2.2 Programmable Buttons

The mouse is equipped with 6 programmable buttons. To customize these buttons and expand your options, you can download and use the dedicated software. This software allows you to assign macros, rebind keys, and fine-tune performance settings.



Image 4.5: Overview of the mouse's 6 programmable buttons and a visual representation of the software interface for customization.

5. Features

5.1 Keyboard Features

- **Mini 60% Layout:** Ultra-compact 62-key design, providing more desk space for mouse movement.
- **Mechanical Red Switches:** Offer a linear, quiet, and smooth keystroke with good touch, sensitivity, and fast response, ideal for gaming.
- **Anti-Ghosting:** 62-key anti-ghosting ensures all keys register simultaneously at high speed without conflict.
- **Rainbow Backlight:** 19 dynamic lighting effects with adjustable brightness and speed for an immersive experience.
- **Illuminated Keycaps:** Two-color injection-molded keycaps with clear and uniform light transmission and abrasion resistance.

- **Ergonomic Design:** Designed for comfortable long-term use, reducing fatigue during extended gaming or typing sessions.



Image 5.1: The luminous design of the keycaps ensures visibility and aesthetic appeal even in low light conditions.

5.2 Mouse Features

- **Adjustable DPI:** Up to 6400 DPI with 6 levels, customizable via software, for precise control in various scenarios.
- **6 Programmable Buttons:** Allows for personalized commands and macros to enhance gaming performance.
- **Ultralight Honeycomb Design:** O-shaped perforated shell reduces weight (65g), improves heat dissipation, and extends lifespan.
- **Ergonomic Shape:** Fits comfortably in the palm, reducing strain during prolonged use.
- **High Durability:** Built with a hard-core customized chip and a lifespan of 50 million clicks.



Image 5.2: Key features of the wired gaming mouse, including RGB flashing lights, 6400 DPI, programmability, and ergonomic design.

5.3 Mouse Pad Features

- **Large Size:** Provides ample space for mouse movement.
- **Non-Slip Rubber Base:** Ensures the mouse pad stays firmly in place during intense gaming sessions.

6. Maintenance

Proper maintenance will extend the lifespan of your K65 Pro combo.

- **Cleaning the Keyboard:** Use a soft, dry cloth to wipe down the keyboard surface. For deeper cleaning, use the provided keycap puller to remove keycaps and clean underneath with compressed air or a small brush. Ensure the keyboard is disconnected before cleaning.
- **Cleaning the Mouse:** Wipe the mouse surface with a soft, slightly damp cloth. Avoid getting moisture into the internal components, especially the honeycomb perforations.
- **Cleaning the Mouse Pad:** The mouse pad can be gently hand-washed with mild soap and water, then air-dried completely before use.
- **Cable Care:** Avoid sharp bends or kinks in the USB cables to prevent damage.

7. Troubleshooting

If you encounter issues with your K65 Pro combo, please refer to the following common solutions:

7.1 Keyboard Issues

- **Keyboard not responding / Keys not working:**
  - Ensure the USB cable is securely connected to both the keyboard and the computer/console.
  - Try plugging the keyboard into a different USB port.
  - Restart your computer/console.
  - If specific keys are not working (e.g., 'u', 'h', 'm', 'j', 'n', 'i', '7', '8' as reported by some users), try removing the keycap and checking for any debris or obstruction under the switch. If the issue persists, it may indicate a hardware fault.
  - Ensure no software conflicts are present. Temporarily disable any background applications that might interfere with keyboard input.
- **Backlight not working or stuck:**
  - Press **FN +** | **keys** to cycle through modes.
  - Press **FN + [{}] keys** to adjust brightness.
  - Long press **FN** to toggle the backlight on/off.
  - Reconnect the keyboard.

7.2 Mouse Issues

- **Mouse not responding:**
  - Ensure the USB cable is securely connected.
  - Try plugging the mouse into a different USB port.
  - Restart your computer/console.
- **DPI not changing:**
  - Press the DPI button firmly.
  - If using custom software, ensure settings are applied correctly.

If these steps do not resolve your issue, please contact customer support for further assistance.

8. Specifications

Feature	Detail
Product Dimensions	12.8 x 4.21 x 1.26 inches
Item Weight	1.32 ounces
Connectivity Technology	USB Wired (Type-C for keyboard)
Keyboard Layout	60% (62-key)
Keyboard Switch Type	Mechanical Red Switch
Keyboard Backlight	Rainbow RGB (19 modes)
Mouse DPI	Adjustable up to 6400 DPI (6 levels)
Mouse Buttons	6 Programmable Buttons

Feature	Detail
Mouse Design	Ultralight Honeycomb
Compatible Devices	Laptop, Gaming Console, Personal Computer

9. Warranty and Support

FELICON products are manufactured with high standards of quality and durability. For information regarding warranty coverage, returns, or technical support, please refer to the product packaging or contact the seller/manufacturer directly through their official channels. Keep your purchase receipt as proof of purchase for any warranty claims.

Manufacturer: FELICON

© 2024 FELICON. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B09KG7R3T4

More documents and user manuals: **https://manuals.plus/**