

StarTech.com 120B-USBC-MULTIPORT

StarTech.com 8-in-1 Mini Docking Station (Model 120B-USBC-MULTIPORT) User Manual

Model: 120B-USBC-MULTIPORT

1. INTRODUCTION

This manual provides detailed instructions for the StarTech.com 8-in-1 Mini Docking Station, Model 120B-USBC-MULTIPORT. This device expands the connectivity of your USB-C or Thunderbolt 3/4 enabled laptop, offering dual 4K 60Hz HDMI video output, a USB 5Gbps hub, 100W Power Delivery passthrough, Gigabit Ethernet, and SD/MicroSD card readers.

Please read this manual thoroughly before using the product to ensure proper operation and to prevent damage.

2. PRODUCT OVERVIEW

The StarTech.com 8-in-1 Mini Docking Station is designed to enhance your laptop's connectivity, transforming it into a versatile workstation. It features multiple ports for various peripherals and display connections.



Figure 2.1: StarTech.com 8-in-1 Mini Docking Station. This image shows the compact gray docking station with its integrated USB-C cable. Visible ports include two HDMI ports, SD/MicroSD card slots, and a USB-C power input port.

2.1 Port Layout



Figure 2.2: Detailed diagram of the 8-in-1 Multiport Adapter ports. The top view shows the USB Type-C input (for power delivery), MicroSD and SD card readers, and two HDMI 2.0 ports. The bottom view displays two USB Type-A 3.2 Gen 1 (5Gbps) ports and a Gigabit Ethernet port.

- **USB Type-C (Host Connection):** Integrated 12-inch (30cm) cable for connecting to your laptop.
- **USB Type-C (Power Delivery):** Supports 100W Power Delivery 3.0 passthrough (15W reserved for adapter, up to 85W for laptop charging).
- **HDMI 2.0 Ports (x2):** Supports dual 4K 60Hz video output (with DP 1.4 Alt Mode w/DSC & MST; 4K 30Hz with DP1.2).
- **USB 3.2 Gen 1 Type-A Ports (x2):** 5Gbps data transfer, one port supports BC 1.2 / 7.5W fast charging.
- **SD Card Reader:** For standard SD memory cards.
- **MicroSD Card Reader:** For MicroSD memory cards.
- **Gigabit Ethernet Port:** For wired network connectivity.

3. SETUP AND INSTALLATION

Follow these steps to set up your StarTech.com 8-in-1 Mini Docking Station.

3.1 Package Contents

- StarTech.com 8-in-1 Mini Docking Station
- Quick-Start Guide

3.2 Connecting the Docking Station

1. **Connect to Host Laptop:** Plug the integrated USB-C host cable from the docking station into an available USB-C or Thunderbolt 3/4 port on your laptop.
2. **Connect Displays:** Connect your HDMI monitors to the two HDMI 2.0 ports on the docking station using HDMI cables (sold separately). Ensure your laptop's GPU supports DP 1.4 with DSC for dual 4K 60Hz output.
3. **Connect Power (Optional but Recommended):** For laptop charging and stable operation, connect a USB-C power adapter (not included) to the USB Type-C Power Delivery port on the docking station. This enables up to 85W passthrough charging for your laptop.
4. **Connect Peripherals:**
 - For wired internet, connect an Ethernet cable to the Gigabit Ethernet port.
 - Connect USB peripherals (e.g., keyboard, mouse, external drives) to the USB 3.2 Gen 1 Type-A ports.
 - Insert SD or MicroSD cards into the respective card reader slots.
5. **Driver Installation:** The docking station typically supports automatic driver installation (Plug and Play) on compatible operating systems. If prompted, follow the on-screen instructions.

Easy Installation



Home Office



Office



Travel Friendly



Auto Drivers



Attached 12" (30cm) USB-C Host Cable

Figure 3.1: Example of an easy installation setup. The image shows the docking station connected to a laptop and two external monitors, illustrating its use in a home office or travel-friendly environment. A smartphone is also shown charging via one of the USB ports.

4. OPERATION

4.1 Display Configuration

Once connected, your operating system should detect the external displays. You can configure display settings (e.g., extend, duplicate, primary display) through your system's display settings.

- **Windows:** Right-click on the desktop, select "Display settings."
- **macOS:** Go to "System Preferences" > "Displays."
- **ChromeOS/Ubuntu:** Access display settings through the system menu.

For optimal 4K 60Hz dual display performance, ensure your laptop supports DisplayPort 1.4 with Display Stream Compression (DSC) and Multi-Stream Transport (MST).

4.2 USB Peripherals and Data Transfer

Connect your USB devices to the USB Type-A ports. The port marked with a battery icon supports BC 1.2 for faster charging of compatible devices.

4.3 Network Connectivity

The Gigabit Ethernet port provides a stable and high-speed wired network connection. Once connected, your operating system should automatically detect the network adapter.

4.4 SD/MicroSD Card Readers

Insert your SD or MicroSD cards into the corresponding slots. The cards will appear as removable drives in your operating system's file explorer.

5. POWER DELIVERY

The docking station supports USB Power Delivery 3.0 passthrough. When an external USB-C power adapter (100W recommended) is connected to the docking station's USB-C PD port, it can charge your laptop while providing power to the docking station and connected peripherals.

- 15W is reserved for the docking station's operation.
- Up to 85W is available for laptop charging.

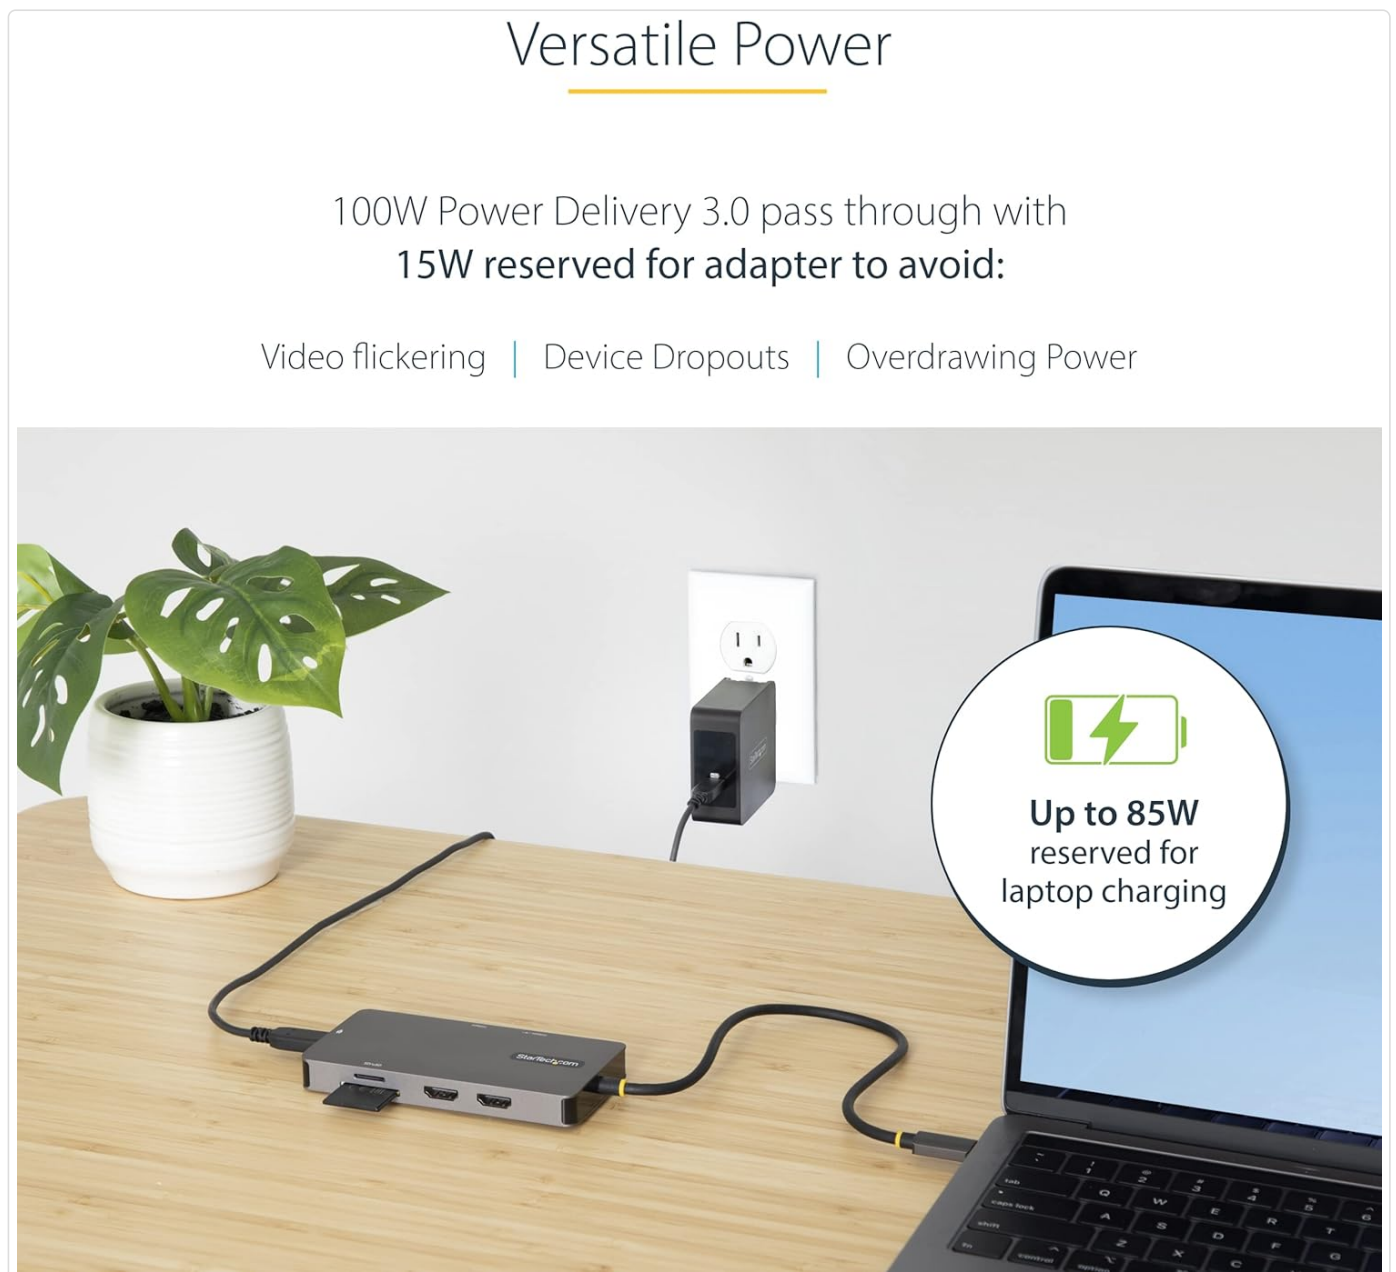


Figure 5.1: Illustration of versatile power delivery. An external USB-C power adapter is shown connected to the docking station, which then charges a laptop. The diagram highlights that 100W Power Delivery 3.0 passthrough reserves 15W for the adapter and provides up to 85W

for laptop charging, preventing video flickering, device dropouts, or overdrawing power.

Using an external power adapter is highly recommended for stable performance, especially when using multiple high-power peripherals or dual displays.

6. COMPATIBILITY

The docking station is compatible with a wide range of devices and operating systems:

- **Host Connection:** USB-C enabled laptops and Thunderbolt 3/4/USB4 laptops.
- **Operating Systems:** Windows (7, 8, 8.1, 10, 11), Chrome OS, Ubuntu, macOS, iPadOS, Android.
- **Tested Brands:** HP, Dell, Lenovo, Microsoft Surface Laptop 3 and up / Pro 7 and up, Chromebooks.



Figure 6.1: Visual representation of wide compatibility. The image shows the docking station connected to a laptop and an external monitor, with logos for Windows, macOS, iPadOS, Android, Linux, and Chrome OS, indicating broad operating system support. A list of compatible laptop brands (HP, Dell, Lenovo, Surface, MacBooks) is also displayed.

7. SPECIFICATIONS

Feature	Detail
Model Number	120B-USBC-MULTIPORT
Connectivity Technology	Wired
Host Interface	USB 3.2 Gen 1 (3.1 Gen 1) Type-C
Video Output	2x HDMI 2.0b (Dual 4K 60Hz with DP 1.4 Alt Mode w/DSC & MST; 4K 30Hz with DP1.2)
USB Ports	2x USB 3.2 Gen 1 Type-A (5Gbps, 1x BC 1.2/7.5W Fast Charge)
Ethernet	Gigabit Ethernet (RJ45)
Card Readers	SD, MicroSD
Power Delivery	USB PD 3.0 Passthrough (100W input, 15W reserved, up to 85W for laptop)
Supported Displays	2
Supported Resolutions	Up to 3840 x 2160 (4K) @ 60Hz
Dimensions (LxWxH)	5.7 x 2.3 x 0.6 inches (145 x 59 x 15 mm)
Weight	5.8 ounces (164 g)
Color	Space Gray
Operating System Compatibility	Windows, Chrome OS, Ubuntu, macOS, iPadOS, Android

Product Dimensions

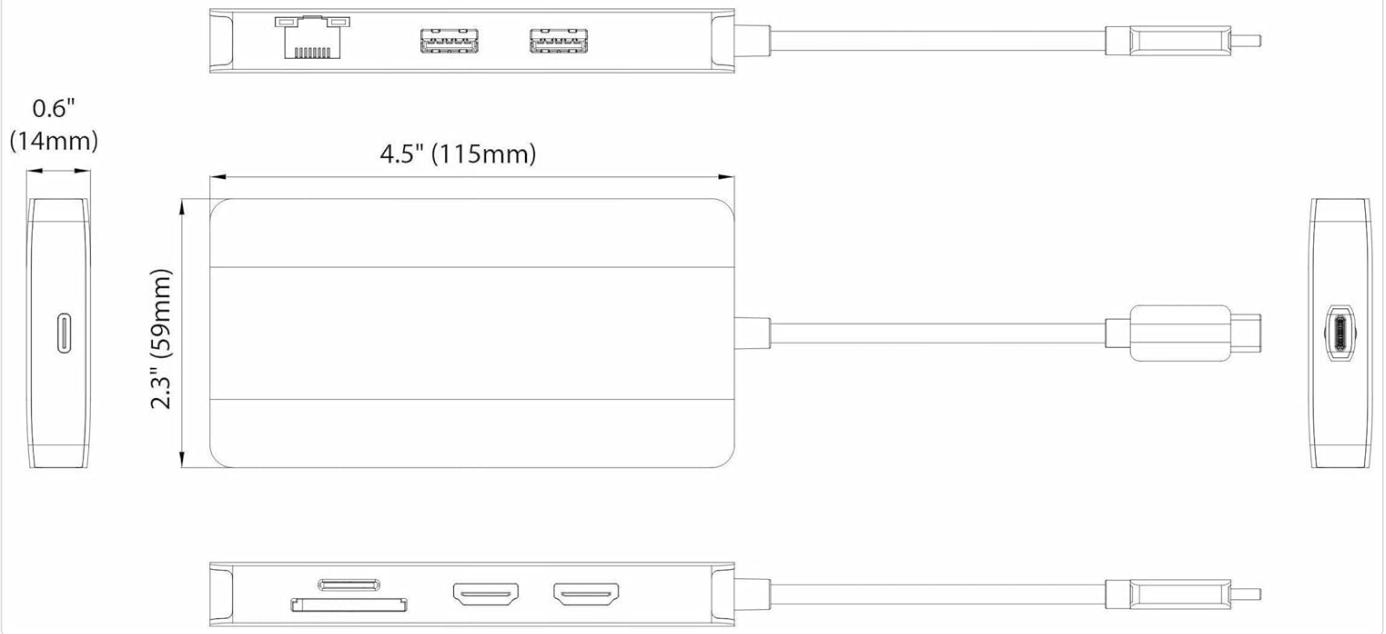


Figure 7.1: Diagram illustrating the product dimensions. The image provides measurements for the length (4.5 inches / 115mm), width (2.3 inches / 59mm), and height (0.6 inches / 14mm) of the docking station.

8. TROUBLESHOOTING

• No Display Output:

- Ensure the USB-C host cable is securely connected to both the docking station and your laptop.
- Verify that your laptop's USB-C port supports DisplayPort Alternate Mode. Not all USB-C ports support video output.
- Check HDMI cable connections to both the docking station and the monitors.
- Update your laptop's graphics drivers.
- If using dual 4K 60Hz, confirm your laptop's GPU supports DP 1.4 with DSC and MST. Lower resolutions might be required if not.
- Connect an external USB-C power adapter to the docking station to ensure sufficient power.

• USB Devices Not Detected:

- Ensure the docking station is properly connected to your laptop.
- Try connecting the USB device directly to your laptop to confirm it functions.
- Connect an external USB-C power adapter to the docking station, especially for high-power USB devices.

• Network Connection Issues:

- Verify the Ethernet cable is securely connected to both the docking station and your router/switch.
- Check your laptop's network settings.
- Test the Ethernet cable with another device if possible.

• Laptop Not Charging:

- Ensure an external USB-C power adapter is connected to the docking station's PD port.
- Verify the power adapter is functional and provides sufficient wattage (100W recommended).
- Confirm your laptop supports USB-C Power Delivery.

9. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the docking station. Avoid liquid cleaners or solvents.
- **Storage:** Store the device in a cool, dry place away from direct sunlight and extreme temperatures.
- **Cable Care:** Avoid bending or crimping the integrated USB-C cable excessively to prevent internal damage.

10. SAFETY INFORMATION

Please read and follow all safety instructions to prevent damage to the device or injury to yourself.

StarTech.com

**Warnings/Warnungen/Avertissements/
Avvertenze/Advertencias/Waarschuwingen/警告**



Electrical Hazards:
Do not use damaged or frayed cables. Exposed wires can lead to electric shocks, short circuits, or fires. Always ensure cables are properly insulated and connected.

Elektrische Gefahren:
Verwenden Sie keine beschädigten oder ausgefranzten Kabel. Freiliegende Drähte können zu Stromschlägen, Kurzschlüssen oder Bränden führen. Achten Sie immer darauf, dass die Kabel ordnungsgemäß isoliert und angeschlossen sind.

Risques électriques:
Ne pas utiliser de câbles endommagés ou effilochés. Les fils exposés peuvent provoquer des chocs électriques, des courts-circuits ou des incendies. Veillez toujours à ce que les câbles soient correctement isolés et raccordés.

Pericoli elettrici:
Non utilizzare cavi danneggiati o sfilacciati. I cavi esposti possono provocare scosse elettriche, cortocircuiti o incendi. Assicurarsi sempre che i cavi siano isolati e collegati correttamente.

Peligros con la Electricidad:
No utilice cables dañados o deshilachados. Los cables expuestos pueden provocar descargas eléctricas, cortocircuitos o incendios. Asegúrese siempre de que los cables estén correctamente aislados y conectados.

Elektrische Gevaren:
Gebruik geen beschadigde of gerafelde kabels. Blootliggende draden kunnen leiden tot elektrische schokken, kortsluiting of brand. Zorg er altijd voor dat kabels goed geïsoleerd en aangesloten zijn.

電気の危険:
傷んだケーブルやほつれたケーブルを使用しないでください。配線が露出していると、感電、ショート、火災の原因となります。ケーブルが適切に絶縁され、接続されていることを常に確認してください。



Heat Buildup:
Overloaded or tightly bundled cables can overheat and pose a fire hazard. Ensure proper ventilation and avoid bundling power cables.

Wärmestau:
Überlastete oder eng gebündelte Kabel können überhitzen und eine Brandgefahr darstellen. Sorgen Sie für eine ausreichende Belüftung und vermeiden Sie das Bündeln von Stromkabeln.

Accumulation de chaleur:
Les câbles surchargés ou en faisceau serré peuvent surchauffer et présenter un risque d'incendie. Veillez à une bonne ventilation et évitez de regrouper les câbles d'alimentation.

Accumulo di calore:
I cavi sovraccarichi o strettamente raggruppati possono surriscaldarsi e costituire un rischio di incendio. Assicurare una ventilazione adeguata ed evitare di raggruppare i cavi di alimentazione.

Acumulación de Calor:
Los cables sobrecargados o muy liados pueden sobrecalentarse y suponer un riesgo de

incendio. Garante una ventilación adecuada y evite agrupar los cables de alimentación.

Warmteontwikkeling:

Overbelaste of strak gebundelde kabels kunnen oververhit raken en brand veroorzaken. Zorg voor goede ventilatie en vermijd het bundelen van voedingskabels.

熱の蓄積:

過負荷やきつく束ねられたケーブルは過熱し、火災の原因となることがあります。適切な換気を行い、電源ケーブルを束ねないようにしてください。



Damage:

Always unplug adapters by holding the plug, not the cable. Pulling by the cable can expose live wires, which could lead to electrical shocks or burns.

Beschädigung:

Ziehen Sie Adapter immer am Stecker aus der Steckdose, nicht am Kabel. Wenn Sie am Kabel ziehen, können stromführende Drähte freigelegt werden, was zu Stromschlägen oder Verbrennungen führen kann.

Dommages:

Débranchez toujours les adaptateurs en tenant la fiche et non le câble. Tirer sur le câble peut exposer des fils sous tension, ce qui peut entraîner des chocs électriques ou des brûlures.

Danni:

Scollegare sempre gli adattatori tenendo la spina, non il cavo. Tirando il cavo si possono esporre i fili sotto tensione, con il rischio di scosse elettriche o ustioni.

Daños:

Siempre desenchufe siempre los adaptadores sujetando el enchufe, no el cable. Si tira del cable, pueden quedar al descubierto alambres con corriente, lo que podría provocar descargas eléctricas o quemaduras.

Schade:

Haal adapters altijd uit het stopcontact door de stekker vast te houden, niet de kabel. Als u aan de kabel trekt, kunnen stroomdraden bloot komen te liggen, wat kan leiden tot elektrische schokken of brandwonden.

損傷:

アダプタのプラグを抜くときは、ケーブルではなく必ずプラグを持って抜いてください。ケーブルを持って引っ張ると、感電や火傷の原因となります。

Figure 10.1: Image displaying multi-language safety warnings. Key warnings include: **Electrical Hazards** (avoid damaged cables, exposed wires), **Heat Buildup** (ensure proper ventilation, avoid covering cables), and **Damage** (always grasp the plug, not the cable, when disconnecting).






- **Electrical Hazards:** Do not use damaged or frayed cables. Exposed wires can lead to electric shocks. Always ensure cables are fully inserted and connected correctly.
- **Heat Buildup:** Overloaded or tightly bundled cables can overheat and pose a fire hazard. Ensure adequate ventilation and avoid blocking cable bundles.
- **Damage:** Always unplug adapters by holding the plug, not the cable. Pulling by the cable can expose live wires, which could lead to electrical shocks or burns.
- **Accumulation of Cable:** Do not allow cables to accumulate in a way that could cause tripping hazards or restrict airflow.

11. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the official StarTech.com website or contact their customer service directly.

StarTech.com Support: www.startech.com/support

StarTech.com offers 24-hour support and is trusted by IT professionals.

	StarTech.com 120B-USBC-MULTIPORT USB-C Multiport Adapter Quick Start Guide Quick start guide for the StarTech.com 120B-USBC-MULTIPORT USB-C Multiport Adapter. This adapter features dual HDMI 2.0 HDR 4K outputs, two USB-A 5Gbps ports, Gigabit Ethernet, SD and MicroSD card readers, and 100W Power Delivery pass-through for your computer.
	StarTech.com USB-C Multiport Adapter - HDMI & VGA - 3x USB - SD/uSD - GbE - 100W Quick Start Guide This guide provides essential information for the StarTech.com DKT30CHVSDPD USB-C Multiport Adapter, covering its features, port layout, power delivery capabilities, and operational details for connecting to laptops and peripherals.
	StarTech.com 102B-USBC-MULTIPORT Quick-Start Guide: USB-C DP 1.4 Adapter Quick-start guide for the StarTech.com 102B-USBC-MULTIPORT USB-C DP 1.4 Multiport Adapter, detailing its features, ports, installation, and requirements for dual 4K 60Hz HDMI, USB 3.2 Gen 2, GbE, and SD card reader.
	StarTech.com 117B-USBC-MULTIPORT: Guía de Inicio Rápido para Adaptador Multipuertos USB-C Guía de inicio rápido para el adaptador multipuertos StarTech.com 117B-USBC-MULTIPORT, que permite conectar múltiples monitores (2x HDMI, 2x DP), periféricos USB-A y red Gigabit Ethernet a través de un solo puerto USB-C, con Power Delivery de 100W.
	StarTech.com 103B-USBC-MULTIPORT Quick-Start Guide: USB-C Hub for Chromebooks Get started quickly with the StarTech.com 103B-USBC-MULTIPORT USB-C adapter. This guide covers setup for connecting to Chromebooks, HDMI displays, USB peripherals, and Gigabit Ethernet, supporting 100W Power Delivery.
	Guía de Inicio Rápido: Adaptador Multipuertos USB-C StarTech.com 104B-USBC-MULTIPORT Guía de inicio rápido para el adaptador multipuertos USB-C StarTech.com 104B-USBC-MULTIPORT, que incluye un puerto HDMI 4K 60Hz, un puerto USB-A de 5 Gbps, dos puertos USB 2.0 y Power Delivery de 100W.

Documents - StarTech.com – 120B-USBC-MULTIPORT




[pdf]

Manuale StarTech Adattatore USB C Multiporta Hdmi 4K 60Hz Hub a 5Gbps 120B USBC MULTIPORT 360186 mmo 98252654 1654682496 0951 30364 prezzoforte it |||

Adattatore USB C Multiporta, Doppio HDMI 4K 60Hz, Hub USB A 5Gbps a 2 porte, 100W Power Delivery Pass-Through, GbE, SD/MicroSD, Cavo da 30cm, Dock da viaggio, Docking Station USB-C per Laptop ID prodotto: **120B-USBC-MULTIPORT**

Questo adattatore USB Type-C multiporta con DP 1.4 Alternative Mode, DSC e ...

lang:it score:45 filesize: 246.55 K page_count: 7 document date: 0000-00-00

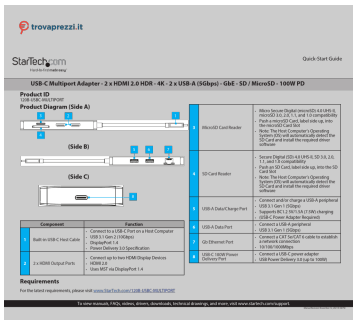


[pdf] Installation Guide Specifications Guide Diagram Label

startech com 120b usbc multiport adattatore usb c multiporta trovaprezzi it manuali |||

Questo manuale d istruzioni fornito da trovaprezzi.it. Scopri tutte le offerte per StarTech.com **120B-USBC-MULTIPORT** Adattatore USB C Multiporta o cerca il tuo prodotto tra le migliori offerte di Schede di Memoria e Lettori Quick-Start Guide USB-C Multiport Adapter - 2 x HDMI 2.0 HDR - 4K - 2 x USB...

lang:en score:43 filesize: 510.63 K page_count: 2 document date: 2022-01-12

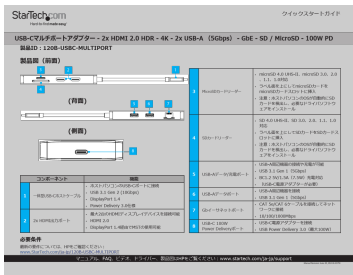


[pdf] User Manual Quick Start Guide Frequently Asked Questions Safety Datasheet Warranty

USB C 2x HDMI 2 0 HDR 4K A 5Gbps G 120B USBC MULTIPORT QSG JA sgcdn

startech 005329 media sets MANUAL |||

USB-C - 2x HDMI 2.0 HDR - 4K - 2x USB-A 5Gbps - GbE - SD / MicroSD - 100W PD ID**120B-USBC-MULTIPORT** 3 2 4 5 6 1 7 3 MicroSD microSD 4.0 UHS-II microSD 3.02.0 1.11.0 microSD microSD OSSD 8 4 SD SD 4.0 UHS-I SSD 3.02.01.11.0 SSDS OSSD USB-C 1 USB 3.1 Gen 2 10Gbp...

lang:i-klngon score:42 filesize: 548.83 K page_count: 2 document date: 2024-06-20

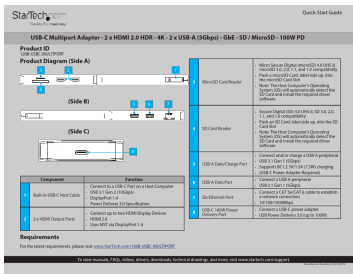

[pdf] Installation Guide Specifications Guide Diagram Label

Guide de l utilisateur en StarTech Adaptateur Multiport USB C Vidéo Double HDMI 4K 60Hz Hub A 5 Gbps à 2 Ports 100W PD Pass Through GbE SD Micro Station d Accueil Mini Dock Câble 30cm 120B

USBC MULTIPORT Stations accueil pour ordinateur portable Inso ca 8a3f0481 ea04 4e4a b890

87e5dc515a89 cdn cnetcontent 8a 3f |||

Quick-Start Guide USB-C Multiport Adapter - 2 x HDMI 2.0 HDR - 4K - 2 x USB-A 5Gbps - GbE - SD / MicroSD - 100W PD Product ID **120B-USBC-MULTIPORT** Product Diagram Side A 3 2 4 Side B Side C 1 5 6 7 8 Component Function Connect to a USB-C Port on a Host Computer 1 Built-in USB...

lang:en score:42 filesize: 482.08 K page_count: 2 document date: 2022-01-12



[pdf]

120b usbc multiport coo media startech cms s |||

Certificate of Country of Origin To whom it may concern, This letter hereby certifies that the follo ... livery Pass-Through/GbE/SD/MicroSD, 12 /30cm Cable, Travel Dock, Laptop Docking Station Product ID: **120B-USBC-MULTIPORT** Country of Origin: Vietnam Please feel free to contact us if you have any furthe...

lang:en score:41 filesize: 38.5 K page_count: 1 document date: 0000-00-00



[pdf]

120b usbc multiport weee media startech cms s |||

Waste Electrical and Electronic Equipment Directive WEEE To whom it may concern, StarTech.com declares that the product is compliant with the Waste Electrical and Electronic Equipment Directive WEEE European Directive 2012/19/EU. Product Number: **120B-USBC-MULTIPORT** USB C Multiport Adapter, Dua...

lang:en score:41 filesize: 38.86 K page_count: 1 document date: 0000-00-00



[pdf] Datasheet

StarTech USB C To HDMI Adapter 2 Supported Display s Up 4K 120B USBC MULTIPORT ET24155941

Enrgtech LTD 120b usbc multiport datasheet media startech cms aname datasheetUrl avalue EAR99

ECCN quot |||

USB C Multiport Adapter, Dual HDMI Video, 4K 60Hz, 2Pt 5Gbps USB-A Hub, 100W Power Delivery Pass-Through/GbE/SD/MicroSD, 12 /30cm Cable, Travel Dock, Laptop Docking Station Product ID: **120B-USBC-MULTIPORT** This USB Type-C Multiport Adapter with DP 1.4 Alternative Mode, DSC and MST, supports dual-HDMI...

lang:en score:40 filesize: 107.24 K page_count: 6 document date: 0000-00-00



[pdf] Declaration of Conformity

120b usbc multiport rohs media startech cms s |||

RoHS REACH Declaration of Conformity Product Number Description **120B-USBC-MULTIPORT** USB C Multiport Adapter, Dual HDMI Video, 4K 60Hz, 2Pt 5Gbps USB-A Hub, 100W Power Delivery Pass-Through/GbE/SD/MicroSD, 12 /30cm Cable, Travel Dock, Laptop Docking Station To whom it may concern, StarTech.com here...

lang:en score:40 filesize: 39.14 K page_count: 1 document date: 0000-00-00



[pdf] Datasheet

USB C Multiport Adapter Dual 4K HDMI PD Laptop Docking Stations 120b usbc multiport datasheet


media startech cms s |||

USB C Multiport Adapter, Dual HDMI Video, 4K 60Hz, 2Pt 5Gbps USB-A Hub, 100W Power Delivery Pass-Through/GbE/SD/MicroSD, 12 /30cm Cable, Travel Dock, Laptop Docking Station Product ID: **120B-USBC-MULTIPORT** This USB Type-C Multiport Adapter with DP 1.4 Alternative Mode, DSC and MST, supports dual-HDMI...

lang:en score:38 filesize: 104.87 K page_count: 6 document date: 0000-00-00



lang:fr score:34 filesize: 247.35 K page_count: 7 document date: 0000-00-00

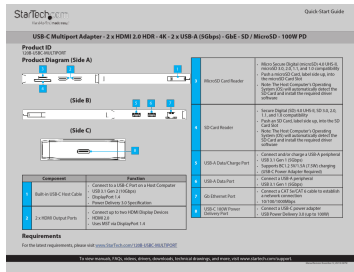

[\[pdf\]](#)

Startech 120B USB-C Multiport Adattatore Multiporta USB C Doppio HDMI 4K 60Hz Hub A 5Gbps
100W PD Pass Through GbE SD MicroSD Cavo 30cm Dock da viaggio Docking Station per Laptop
Melchioni Electronics startech 120b usb-c multiport 811000037 melchioni ready media assets files
reference |||

Adattatore USB C Multiporta, Doppio HDMI 4K 60Hz, Hub USB A 5Gbps a 2 porte, 100W Power Delivery Pass-Through, GbE, SD/MicroSD, Cavo da 30cm, Dock da viaggio, Docking Station USB-C per Laptop ID prodotto: **120B-USBC-MULTIPORT** Questo adattatore USB Type-C multiporta con DP 1.4 Alternative Mode, DSC e ...
lang:it score:34 filesize: 248.79 K page_count: 7 document date: 0000-00-00

[\[pdf\]](#)

Adattatore USB C Multiporta Doppio startech 120b usbc multiport 811000037melchioni ready media
assets files startech 811000037 reference srsItd AfmBOOpLcdaLn2kdU6P ccfI7xiG
bouarFqAPBdwOSuORB3atrMmAk |||

Adattatore USB C Multiporta, Doppio HDMI 4K 60Hz, Hub USB A 5Gbps a 2 porte, 100W Power Delivery Pass-Through, GbE, SD/MicroSD, Cavo da 30cm, Dock da viaggio, Docking Station USB-C per Laptop ID prodotto: **120B-USBC-MULTIPORT** Questo adattatore USB Type-C multiporta con DP 1.4 Alternative Mode, DSC e ...
lang:it score:33 filesize: 248.79 K page_count: 7 document date: 2024-11-14

[\[pdf\]](#)

120B USBC MULTIPOrT StarTech Adaptateur Multiport USB C Vidéo Double HDMI 4K 60Hz Hub A 5 Gbps à 2 Ports 100W Power Delivery Pass Through GbE SD Micro Station d Accueil Mini Dock pour PC Portable Câble 30cm mmo 98252654 1649162547 2544 15534 objects icecat biz |||

Adaptateur Multiport USB C - Vido Double HDMI 4K 60Hz - Hub USB-A 5 Gbps 2 Ports, 100W Power Delivery Pass-Through, GbE, SD/Micro SD, Station d Accueil/Mini Dock pour PC Portable, Cble 30cm N de produit: **120B-USBC-MULTIPOrT** Cet adaptateur multiport USB Type-C avec mode alternatif DP 1.4, DSC et MST...


lang:fr score:32 filesize: 247.36 K page count: 7 document date: 0000-00-00

[\[pdf\]](#) User Manual Installation Guide Specifications Guide Diagram Label

User Manual StarTech USB C Multiport Adapter Dual HDMI 4K 60Hz 2x 5Gbps A 3 1 Hub 100W Power
Delivery GbE SD MicroSD Mini Dock CareTek Information Technology Solutions 1073030244 content
utilize User |||

Quick-Start Guide USB-C Multiport Adapter - 2 x HDMI 2.0 HDR - 4K - 2 x USB-A
5Gbps - GbE - SD / MicroSD - 100W PD Product ID **120B-USBC-MULTIPORT**
Product Diagram Side A 3 2 4 Side B Side C 1 5 6 7 8 Component Function Connect
to a USB-C Port on a Host Computer 1 Built-in USB...


lang:en score:31 filesize: 474.53 K page_count: 2 document date: 2022-03-24

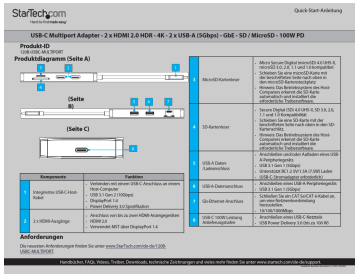

StarTech.com 120B-USBC-MULTIPORT USB-C Multiport Adapter Quick Start Guide

Quick start guide for the StarTech.com 120B-USBC-MULTIPORT USB-C Multiport Adapter. This adapter features dual HDMI 2.0 HDR 4K outputs, two USB-A 5Gbps ports, Gigabit Ethernet, SD and microSD card readers, and 100W Power Delivery pass-through for your computer.

lang:de **score:28** filesize: 182.93 K page_count: 2 document date: 2025-08-07

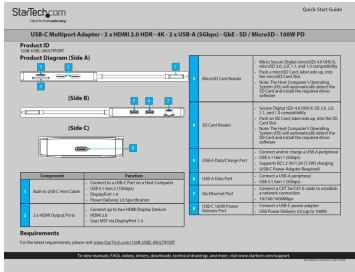

[pdf] Installation Guide Specifications Guide Diagram Label

manualStarTech USB C Multiport Adapter Dual HDMI Video 4K 60Hz 2Pt 5G TOUCHSALEmmo

98252654 1655391361 7746 20953cdn iceshop nl objects mmo 20953 |||

Quick-Start Guide USB-C Multiport Adapter - 2 x HDMI 2.0 HDR - 4K - 2 x USB-A 5Gbps - GbE - SD / microSD - 100W PD Product ID **120B-USBC-MULTIPORT**

Product Diagram Side A 3 2 4 Side B Side C 1 5 6 7 8 Component Function Connect to a USB-C Port on a Host Computer 1 Built-in USB...

lang:en **score:24** filesize: 482.08 K page_count: 2 document date: 2022-01-12



[pdf] Datasheet

StarTech USB C Multiport adapter 3 0 plug Data sheet a5370634013485f117e298a94cabf1f0b50 gzhls

at blob ldb 2 1 6 7 |||

USB C Multiport Adapter, Dual HDMI Video, 4K 60Hz, 2Pt 5Gbps USB-A Hub, 100W Power Delivery Pass-Through/GbE/SD/microSD, 12 /30cm Cable, Travel Dock, Laptop Docking Station Product ID: **120B-USBC-MULTIPORT** This USB Type-C Multiport Adapter with DP 1.4 Alternative Mode, DSC and MST, supports dual-HDMI...

lang:en **score:22** filesize: 107.19 K page_count: 6 document date: 0000-00-00



[pdf] Datasheet

Document StarTech USB C Multiport Adapter Dual 4K HDMI PD fus 787878datasheet cdn3 evostore io documents fusion |||

USB C Multiport Adapter, Dual HDMI Video, 4K 60Hz, 2Pt 5Gbps USB-A Hub, 100W Power Delivery Pass-Through/GbE/SD/microSD, 12 /30cm Cable, Travel Dock, Laptop Docking Station Product ID: **120B-USBC-MULTIPORT** This USB Type-C Multiport Adapter with DP 1.4 Alternative Mode, DSC and MST, supports dual-HDMI...

lang:en **score:22** filesize: 104.87 K page_count: 6 document date: 0000-00-00



[pdf] Borchure

Manufacturer Brochure StarTech USB C Multiport Adapter Dual HDMI 4K 60Hz 2x 5Gbps A 3 1 Hub 100W Power Delivery GbE SD MicroSD Mini Dock CareTek Information Technology Solutions 1073030244 content etilize Manufacturer |||

USB C Multiport Adapter, Dual HDMI Video, 4K 60Hz, 2Pt 5Gbps USB-A 3.1 Hub, 100W Power Delivery, GbE, SD/MicroSD, 12 /30cm Cable, Travel Dock, Laptop Docking Station Product ID: **120B-USBC-MULTIPORT** This USB Type-C Multiport Adapter with DP 1.4 Alternative Mode, DSC and MST, supports dual-HDMI HDR ... lang:en **score:22** filesize: 104.86 K page_count: 6 document date: 0000-00-00



[pdf]

leafletStarTech USB C Multiport Adapter Dual HDMI Video 4K 60Hz 2Pt 5G TOUCHSALEmmo 98252654 1655391360 1348 26976cdn iceshop nl objects mmo 26976 ||| USB C Multiport Adapter, Dual HDMI Video, 4K 60Hz, 2Pt 5Gbps USB-A Hub, 100W Power Delivery Pass-Through/GbE/SD/MicroSD, 12 /30cm Cable, Travel Dock, Laptop Docking Station Product ID: **120B-USBC-MULTIPORT** This USB Type-C Multiport Adapter with DP 1.4 Alternative Mode, DSC and MST, supports dual-HDMI... lang:en **score:22** filesize: 104.87 K page_count: 6 document date: 2022-06-16



[pdf]

Download leaflet StarTech USB C Multiport Adapter Dual HDMI Video 4K 60Hz 2 Port 5Gbps A Hub 100W Power Delivery Pass Through GbE SD MicroSD 30cm Kabel Travel Dock Laptop Docking Station Computer Connections SKU 120B USBC MULTIPORTEAN 065030895576Downloadbare informatie mmo 98252654 1654692657 2366 32073 objects icecat biz ||| USB C Multiport Adapter, Dual HDMI Video, 4K 60Hz, 2 Port 5Gbps USB-A Hub, 100W Power Delivery Pass-Through, GbE, SD/MicroSD, 30cm Kabel, Travel Dock, Laptop Docking Station Productcode: **120B-USBC-MULTIPORT** Deze USB Type-C Multiport Adapter met DP 1.4 Alternative Mode, DSC en MST, ondersteunt dual-H... lang:nl **score:22** filesize: 246.33 K page_count: 7 document date: 0000-00-00



USB C-multiportadapter, dubbel HDMI-video, 4K 60 Hz, 2Pt 5 Gbps USB-A -hubb, 100 W strömförsörjning, GbE, SD/MicroSD, 30 cm kabel, resedocka, dockningsstation för bärbar dator Produkt ID: **120B-USBC-MULTIPORT** Denna USB Type-C-multiportadapter med DP 1.4 Alternative Mode, DSC och MST stöder dubbel HDMI-video...

[\[pdf\]](#)

```
4bfcc0ac78e0e101170a335b620cca337024 gzhl5 at blob ldb 5 2 3 |||
```

Dieser USB Typ-C Multiport Adapter mit DP 1.4 Alternative Mode, DSC und MST,...

[\[pdf\]](#)

USB C Multiport Adapter, USB C auf Dual HDMI Video, 4K 60Hz, 5Gbit/s USB-A Hub, 100W PD Pass-through/GbE/SD-MicroSD Kartenleser, Reiseadapter/Laptop Dockingstation, Thunderbolt 3 4 Kompatibel Produkt-ID: **120B-USBC-MULTIPORT** Dieser USB Typ-C Multiport Adapter mit DP 1.4 Alternative Mode, DSC und MST,...

lang:de score:22 filesize: 246.82 K page_count: 7 document date: 0000-00-00



[pdf]

Ficha técnica StarTech Adaptador Multipuertos USB C 2x HDMI 4K 60Hz Hub A 3 1 2Pt 5Gbps PD 100W GbE SD MicroSD Cable de 30cm Docking Station Tipo Viajes para Portátiles Kipmion Tecnología visite startech connectivity tools120B USBC MULTIPORT está respaldado por una garantía años y un soporte técnico multilingüe gratuito vida The Advantage mmo 98252654 1654681628 7437 25109 objects icecat biz |||

Adaptador Multipuertos USB C 2x HDMI 4K 60Hz, Hub USB-A 3.1 2Pt 5Gbps, PD 100W, GbE, SD/MicroSD, Cable de 30cm, Docking Station USB Tipo C de Viajes para Portátiles ID del Producto: **120B-USBC-MULTIPORT** Este Adaptador Multipuertos USB Tipo-C con Modo Alternativo DP 1.4, DSC y MST, admite video doble HD...

lang:es score:22 filesize: 246.8 K page_count: 7 document date: 0000-00-00



[pdf]

Adaptador Multipuertos USB C 2x HDMI 4K 60Hz Hub A 7 giorni fa — Este Tipo con Modo Alternativo DP 1 4 DSC y MST admite video doble HDMI@ HDR resoluciones de hasta sin 627e68e65b2391 63345803 cdn cyberpuerta mx storage articles multimedia 627 e68 e65 |||

Adaptador Multipuertos USB C 2x HDMI 4K 60Hz, Hub USB-A 3.1 2Pt 5Gbps, PD 100W, GbE, SD/MicroSD, Cable de 30cm, Docking Station USB Tipo C de Viajes para Laptops ID del Producto: **120B-USBC-MULTIPORT** Este Adaptador Multipuertos USB Tipo-C con Modo Alternativo DP 1.4, DSC y MST, admite video doble HDMI...

lang:es score:22 filesize: 246.78 K page_count: 7 document date: 0000-00-00



StarTech.com 120B-USBC-MULTIPORT Adaptador Docking Station USB-C 8 en 1

Adaptador multipuertos StarTech.com 120B-USBC-MULTIPORT USB-C 8 en 1 con doble HDMI 4K 60Hz, USB 3.2 Gen 1, GbE y Power Delivery 100W. Convierte tu portátil en una estación de trabajo completa.

lang:es score:18 filesize: 249.59 K page_count: 7 document date: 2025-08-26



Expanda la conectividad de su laptop USB-C con el adaptador multipuertos StarTech.com 120B-USBC-MULTIPORT. Ofrece doble HDMI 4K 60Hz, USB 3.2 Gen 1, Gigabit Ethernet y carga PD 100W.

Découvrez l'adaptateur multiport USB-C de StarTech.com (120B-USBC-MULTIPORT) offrant double sortie HDMI 4K 60Hz, un hub USB-A 5Gbps, Ethernet Gigabit et alimentation 100W Power Delivery. Transformez votre portable en station de travail.