

ASUS PROART B760-CREATOR D4

ASUS ProArt B760-CREATOR D4 Motherboard User Manual

Model: PROART B760-CREATOR D4

INTRODUCTION

The ASUS ProArt B760-CREATOR D4 motherboard is designed for content creators, offering robust performance and extensive connectivity for the latest 12th and 13th Generation Intel Core processors. This manual provides essential information for setting up, operating, maintaining, and troubleshooting your motherboard to ensure optimal performance and longevity.



Image Description: A top-down view of the ASUS ProArt B760-CREATOR D4 motherboard alongside its black retail packaging. The motherboard features a black PCB with gold accents, an LGA 1700 CPU socket, four DDR4 DIMM slots, multiple PCIe slots, and heatsinks over the VRM and M.2 slots. The retail box displays the ProArt logo and model name.

PACKAGE CONTENTS

Before you begin, please verify that all items listed below are present in your motherboard package. If any item is missing or damaged, contact your retailer.

- ASUS ProArt B760-CREATOR D4 Motherboard
- User Guide
- SATA 6Gb/s cables (2x)
- Rubber pads for M.2 SSD installation
- M.2 Screw for M.2 Key E
- ASUS Control Center Express activation key card
- ProArt ruler
- Q-Connector

What's in the Box

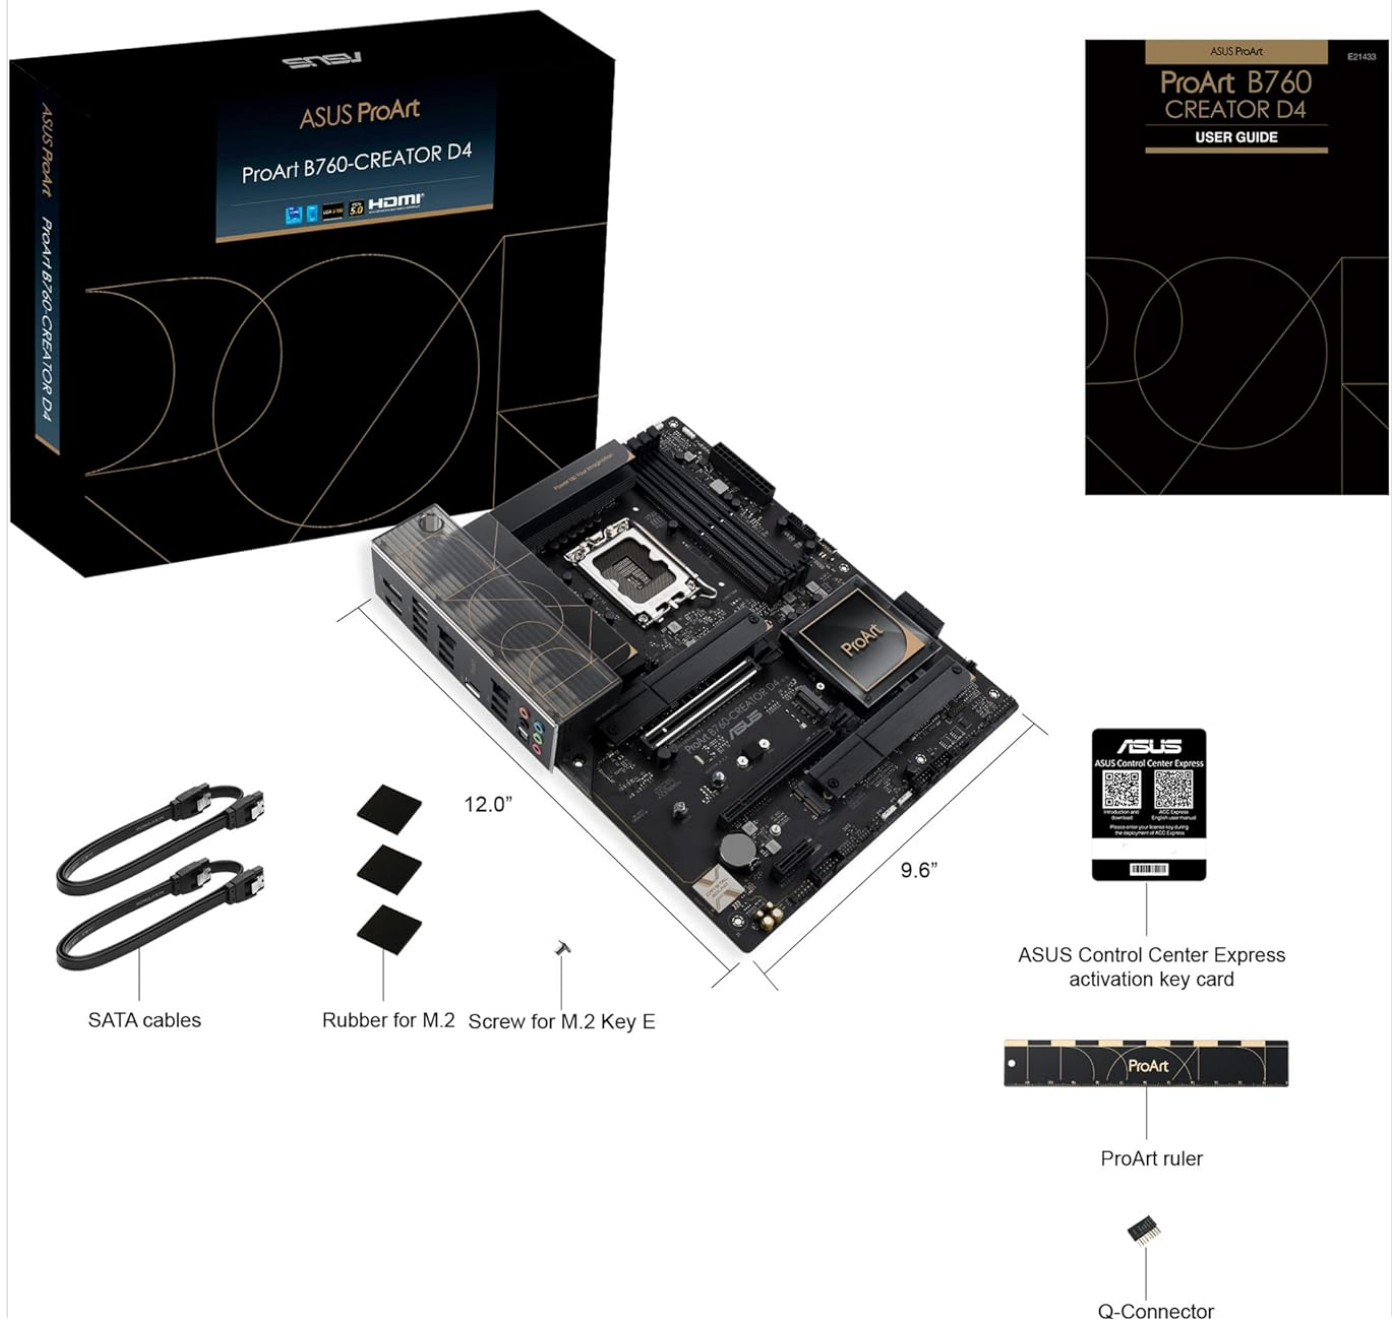


Image Description: An overhead view displaying the contents typically found in the ASUS ProArt B760-CREATOR D4 motherboard package. This includes the motherboard itself, the user guide, two SATA cables, small rubber pads for M.2 drives, an M.2 screw, an ASUS Control Center Express activation card, a ProArt branded ruler, and a Q-Connector for easier front panel header connection.

SETUP AND INSTALLATION

This section guides you through the physical installation of the motherboard and its components into your PC chassis.

1. Preparing the Motherboard

Place the motherboard on a non-conductive, flat surface. Ensure you are grounded to prevent electrostatic discharge (ESD) damage.

2. Installing the CPU

Carefully open the CPU socket retention arm. Align the triangular mark on the Intel LGA 1700 CPU with the mark on the socket. Gently place the CPU into the socket without forcing it. Close the retention arm to secure the CPU.



Image Description: A detailed view of the LGA 1700 CPU socket on the motherboard, showing the intricate pin array and the CPU retention mechanism. This socket is compatible with 12th and 13th Generation Intel Core processors.

3. Installing RAM (DDR4)

The motherboard supports DDR4 memory. For optimal performance, install memory modules in the recommended dual-channel configuration, typically in slots A2 and B2 first. Open the DIMM slot clips, align the memory module notch with the slot key, and press down firmly until the clips snap into place.

4. Installing M.2 SSDs

The motherboard features three M.2 slots for high-speed storage. Remove the M.2 heatsink, insert the M.2 SSD into the slot at an angle, and then gently push it down. Secure it with the M.2 Q-Latch mechanism or a screw, then reattach the heatsink.

DIY Friendly



Image Description: This image highlights user-friendly features for PC building. It shows the Q-LED indicator for quick diagnostics, SafeDIMM for reinforced memory slots, SafeSlot for stronger PCIe device retention, and the M.2 Q-Latch for tool-less M.2 SSD installation.

5. Installing PCIe Cards

Insert your graphics card or other PCIe expansion cards into the appropriate PCIe slots. The motherboard supports PCIe 5.0 for the primary graphics card slot and PCIe 4.0 for other expansion slots.



Image Description: A close-up view of the PCIe expansion slots on the motherboard, indicating the PCIe 5.0 x16 slot, PCIe 4.0 x16 (max x4) slot, and PCIe 3.0 x1 slot. These slots allow for the installation of graphics cards and other expansion cards.

6. Connecting Power Supply

Connect the 24-pin ATX power connector and the 8-pin (or 4+4 pin) CPU power connector from your power supply to the motherboard.

7. Connecting Front Panel and Peripherals

Connect the front panel headers (power button, reset button, USB ports, audio jacks) to the corresponding pins on the motherboard. Utilize the Q-Connector for easier front panel header connection. Connect SATA drives to the SATA 6Gb/s ports.

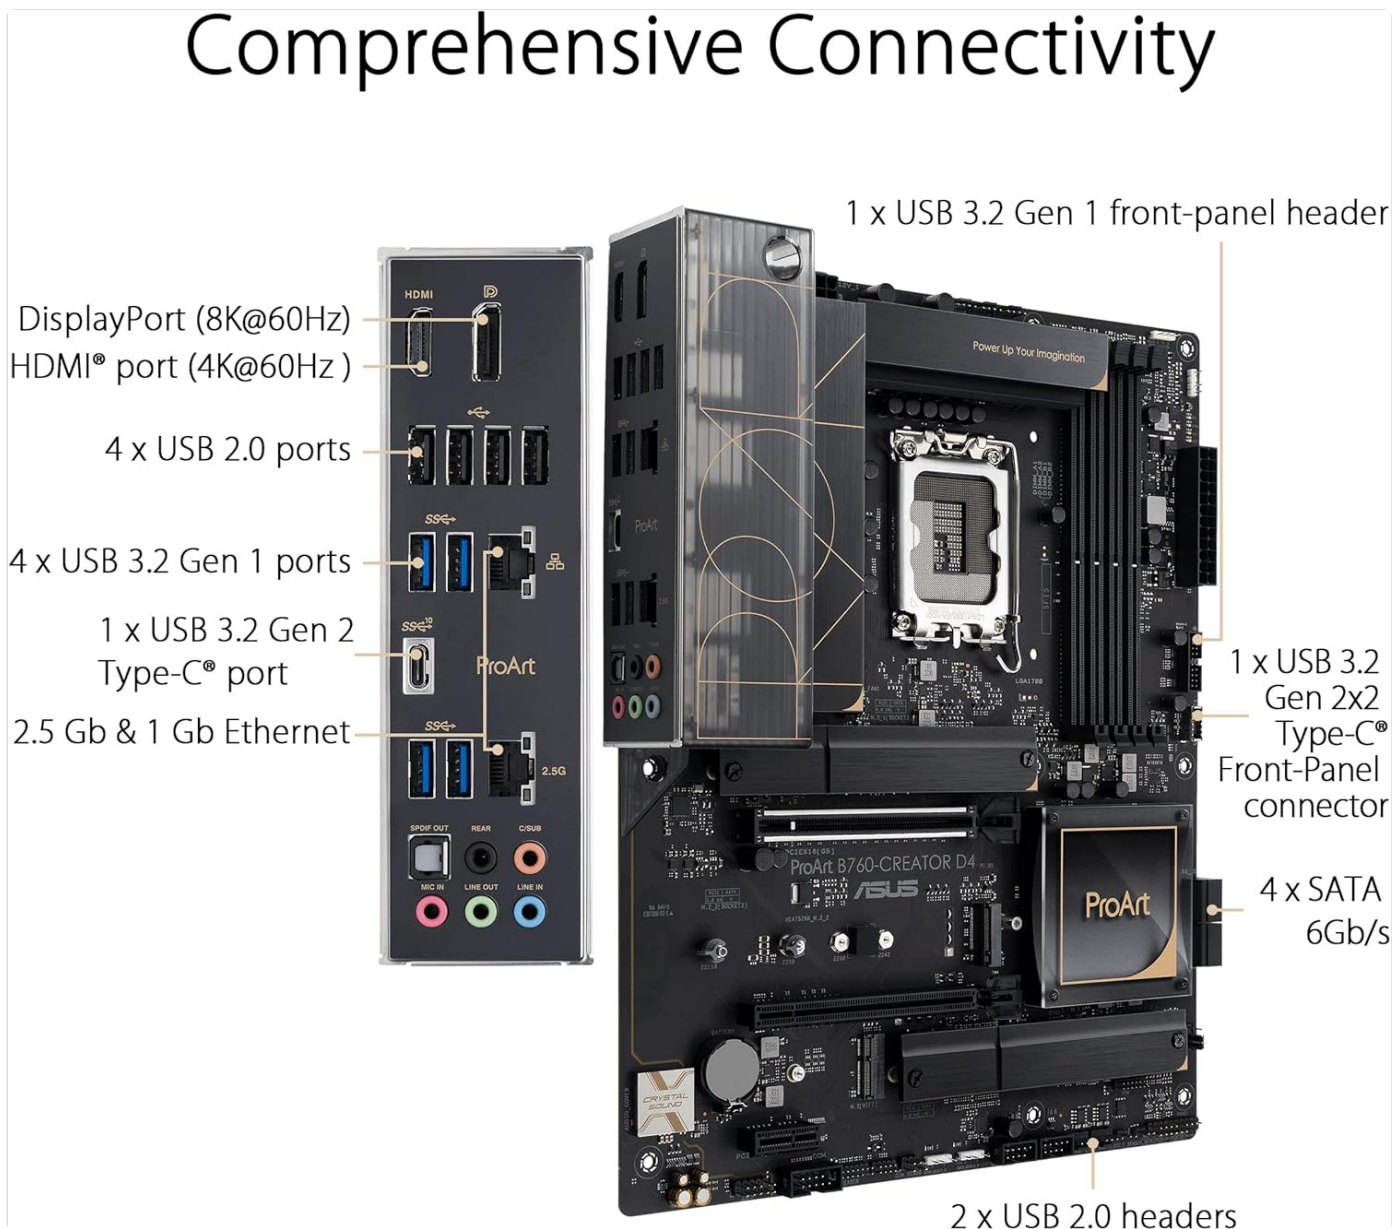


Image Description: An annotated diagram showcasing the comprehensive connectivity options of the ASUS ProArt B760-CREATOR D4 motherboard. It highlights the rear I/O ports including DisplayPort, HDMI, USB 2.0, USB 3.2 Gen 1, USB 3.2 Gen 2 Type-C, and 2.5 Gb & 1 Gb Ethernet. Also shown are internal headers like USB 3.2 Gen 1 front-panel header, USB 3.2 Gen 2x2 Type-C front-panel connector, SATA 6Gb/s ports, and USB 2.0 headers.

OPERATING THE MOTHERBOARD

Once all components are installed and connected, you can power on your system.

1. Initial Boot and BIOS/UEFI Setup

Upon first boot, press the **DEL** key during the Power-On Self-Test (POST) to enter the BIOS/UEFI setup utility. Here, you can configure system settings, boot order, and enable specific features. Ensure your BIOS is up to date for optimal compatibility and performance.

2. Operating System Installation

Install your preferred operating system (e.g., Windows 11, Linux) from a bootable USB drive or optical media. Follow the on-screen instructions for installation.

3. Driver Installation

After OS installation, install the necessary drivers for the chipset, LAN, audio, and other integrated components. These can be found on the ASUS support website for your specific motherboard model. Installing the latest drivers ensures system stability and full functionality.

4. Software Utilities

ASUS provides several software utilities to enhance your experience:

- **ProArt Creator Hub:** A centralized portal for monitoring system status, customizing settings, and optimizing workflow for creative applications.
- **CreationFirst:** Network optimization software that prioritizes bandwidth for creative applications.
- **Two-Way AI Noise Cancelation:** Enhances audio clarity for online communication by filtering out background noise.

MAINTENANCE

Regular maintenance helps ensure the longevity and stable operation of your motherboard.

1. Keeping Components Cool

The ProArt B760-CREATOR D4 features robust cooling solutions, including large VRM heatsinks, aluminum M.2 heatsinks, and multiple 4-pin PWM fan headers. Ensure proper airflow within your PC case and regularly clean dust from fans and heatsinks to maintain optimal temperatures.

Comprehensive Cooling

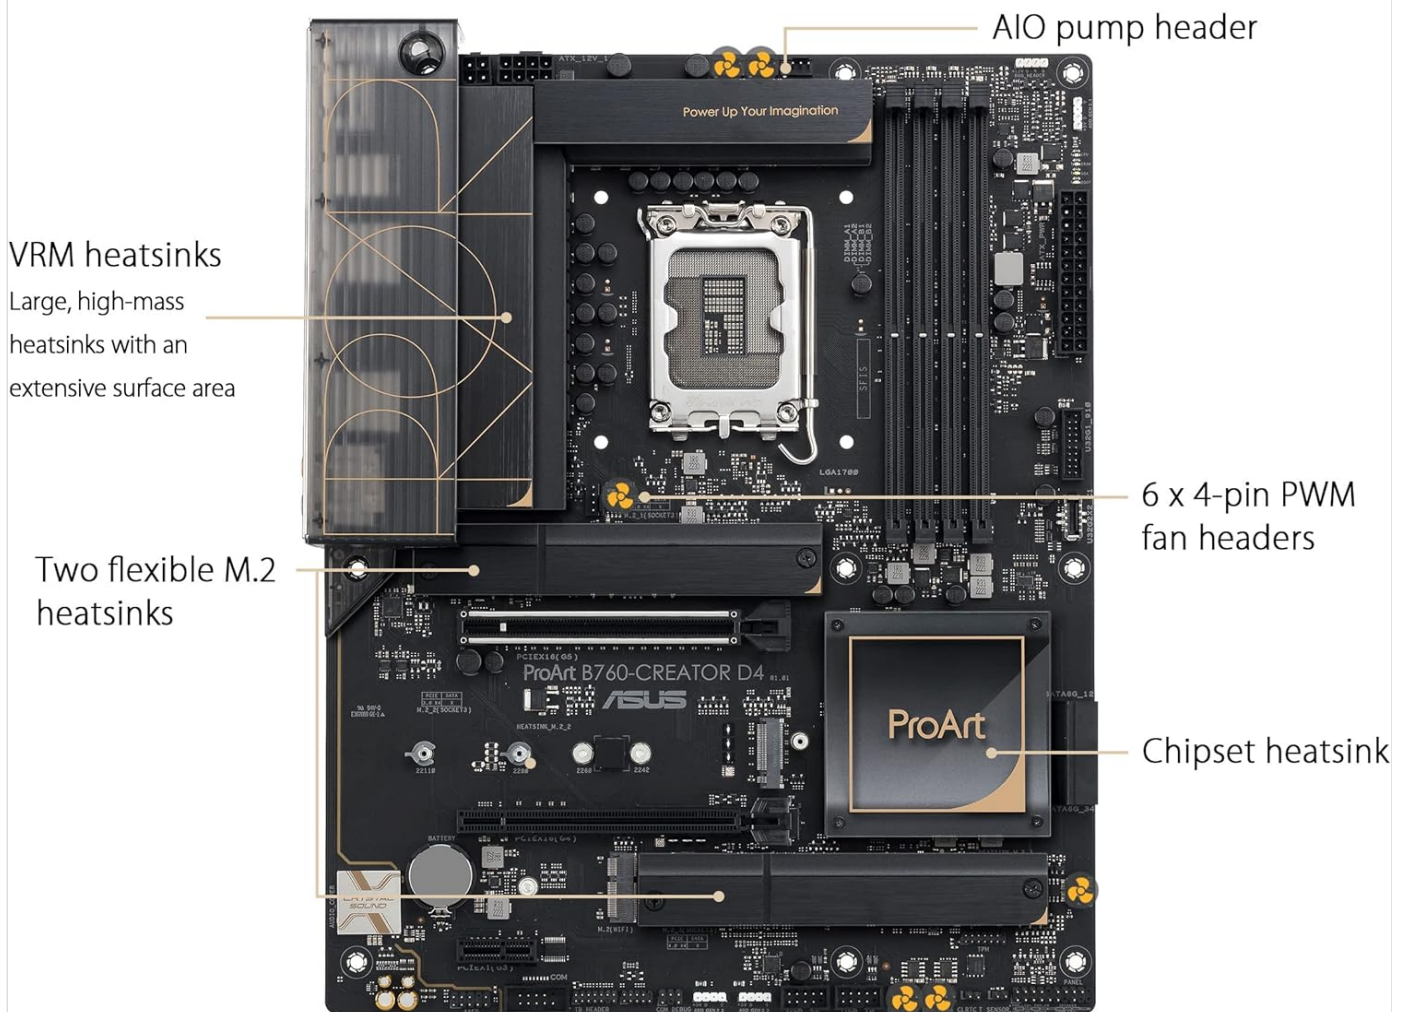


Image Description: An overhead view of the motherboard highlighting its comprehensive cooling features. Labels point to the large, high-mass VRM heatsinks with extensive surface area, two flexible M.2 heatsinks, six 4-pin PWM fan headers, an AIO pump header, and the chipset heatsink, all designed to dissipate heat effectively.

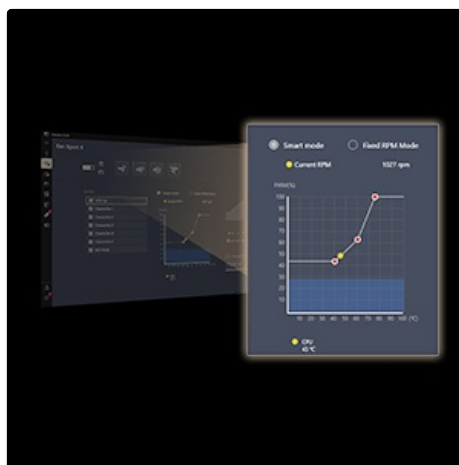


Image Description: A screenshot of the ASUS Fan Xpert software interface, showing options for fan control and system temperature monitoring. The graph illustrates fan speed curves relative to CPU temperature, allowing users to customize cooling performance.

2. BIOS and Driver Updates

Periodically check the ASUS support website for updated BIOS versions and drivers. Updating these can improve system

stability, compatibility with new hardware, and overall performance. Follow the instructions provided by ASUS for safe updating procedures.

3. Physical Cleaning

Ensure your system is powered off and unplugged before cleaning. Use compressed air to remove dust from the motherboard, heatsinks, and fan blades. A soft, lint-free cloth can be used to gently wipe surfaces.

TROUBLESHOOTING

This section provides solutions to common issues you might encounter.

1. Q-LED Indicators

The motherboard features Q-LED indicators that provide quick diagnostic feedback during boot-up. Observe the LEDs to identify the component causing a boot failure:

- **CPU LED:** Indicates an issue with the CPU.
- **DRAM LED:** Indicates an issue with the memory.
- **VGA LED:** Indicates an issue with the graphics card.
- **BOOT LED:** Indicates an issue with the boot device.

If a Q-LED remains lit, refer to the corresponding component for troubleshooting. For example, if the DRAM LED stays on, reseat your RAM modules or try them one by one.

2. No Power / No Boot

- Check all power connections (24-pin ATX, 8-pin CPU) to the motherboard.
- Ensure the power supply is switched on and functioning correctly.
- Verify that the front panel power button is correctly connected.
- Try booting with minimal components (CPU, one RAM stick, graphics card if no integrated graphics) to isolate the issue.

3. No Display Output

- Ensure your monitor is connected to the correct display output (either motherboard's integrated graphics port or dedicated graphics card).
- Reseat the graphics card in its PCIe slot.
- Test with a different display cable or monitor if possible.

4. Component Not Detected

- **M.2 SSD:** Ensure it is properly seated and secured. Check BIOS settings to confirm M.2 slot detection.
- **SATA Drive:** Verify SATA data and power cables are securely connected. Check BIOS for SATA port configuration.
- **RAM:** Reseat modules, try one at a time, or test with known-good modules.

SPECIFICATIONS

Key technical specifications for the ASUS ProArt B760-CREATOR D4 Motherboard:

Feature	Specification
Brand	ASUS
Model Name	PROART B760-CREATOR D4
CPU Socket	LGA 1700

Feature	Specification
Compatible Processors	12th & 13th Generation Intel Core
Chipset Type	Intel B760
RAM Memory Technology	DDR4
Memory Clock Speed	2133 MHz (Base, supports higher via XMP)
Memory Storage Capacity (Max)	128 GB
Product Dimensions	13.5 x 10.8 x 2.8 inches
Item Weight	3.97 pounds
Platform	Windows
Date First Available	January 3, 2023

Note: Specifications are subject to change without notice. For the most up-to-date information, please refer to the official ASUS product page.

WARRANTY AND SUPPORT

ASUS products are manufactured to the highest quality standards. This motherboard comes with a standard manufacturer's warranty. For detailed warranty terms, conditions, and duration, please refer to the warranty card included in your product package or visit the official ASUS support website.



For technical assistance, driver downloads, BIOS updates, and troubleshooting guides, please visit the official ASUS support website:

[ASUS Official Support Website](#)

When contacting support, please have your product model number (PROART B760-CREATOR D4) and serial number ready.


Related Documents - PROART B760-CREATOR D4

	MACHINIST B760 GT4 Motherboard User Manual: Installation, Specifications, and Troubleshooting Comprehensive user manual for the MACHINIST B760 GT4 motherboard, covering component overview, installation guides for CPU, RAM, and expansion cards, detailed specifications, connector explanations, BIOS setup, and troubleshooting FAQs.
	Maxsun MS-PC Farm B760I / B760I V2 Motherboard Manual - Specifications & Pinouts Detailed user manual for the Maxsun MS-PC Farm B760I and B760I V2 motherboards. Includes hardware specifications, mainboard layout, rear I/O descriptions, internal connector pin definitions, and ESD protection details.

	MSI Creator X299 Motherboard: Quick Start and User Guide Comprehensive guide for the MSI Creator X299 motherboard, covering installation, specifications, BIOS setup, and troubleshooting for PC builders and enthusiasts.
	ASUS PRIME H510M-R Motherboard Benutzerhandbuch: Installation, Spezifikationen und BIOS-Infos Umfassendes Benutzerhandbuch für das ASUS PRIME H510M-R Motherboard, das Installation, Sicherheitshinweise, Hardware-Übersicht, BIOS-Informationen, detaillierte Spezifikationen und Umwelt-Compliance abdeckt.
	MSI PRO B760-P DDR4 II Motherboard User Guide Comprehensive user guide for the MSI PRO B760-P DDR4 II Motherboard, covering installation, specifications, and features.
	ASUS PRIME Z490-A Motherboard User Manual and Installation Guide Comprehensive guide for the ASUS PRIME Z490-A motherboard, covering product introduction, basic installation steps, BIOS and RAID configuration, safety precautions, and detailed specifications for PC builders and enthusiasts.

Documents - ASUS – PROART B760-CREATOR D4

	[pdf] User Manual Guide ProArt B760 CREATOR D4 Motherboard User Guide 1 almasiran ir manual motherboard asus ProArt B760-CREATOR D4 reated in Master PDF Editor reated in Master PDF Editor . ProArt B760-CREATOR D4 1 SATA 6Gb/s 2 M.2 2 ProArt 1 M.2 E Q 1 1 ACC Express 1 1 . CPU ProArt B760-CREATOR D4 Intel CoreTM Intel CoreTM L... lang:en score:81 filesize: 2.18 M page_count: 23 document date: 2023-03-05
---	---

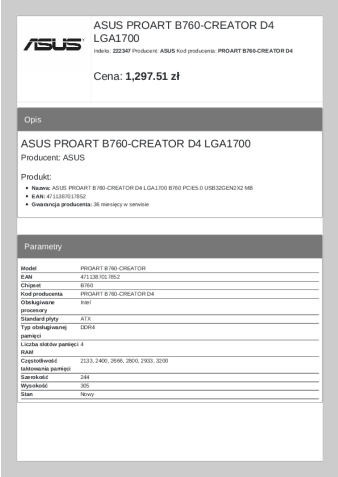

[pdf]

ASUS PROART B760 CREATOR D4 LGA1700 Sklep internetowy stylem pl asus proart b760 creator d4 lga1700

222347 upload files product |||

ASUS **PROART B760-CREATOR D4** LGA1700 Indeks: 222347 Producent: ASUS Kod producenta: **PROART B760-CREATOR D4** Cena: 1,297.51 zł Opis ASUS **PROART B760-CREATOR D4** LGA1700 Producent: ASUS Produkt: Nazwa: ASUS **PROART B760-CREATOR D4** LGA1700 B760 PCIE5.0 USB32GEN2X2 MB EAN: 4711387017852

Gwarancja producent...

lang:sw **score:60** filesize: 28.85 K page_count: 1 document date: 2023-02-02



[pdf]


Datenblatt ASUS PROART B760 CREATOR D4 Intel LGA 1700 Hersteller Art Nr 90MB1DU0 M0EAY0 EAN UPC

4711387017852 Beschreibung Prozessorhersteller Prozessorsockel LGA tehnicni podatki 2841366 asus proart b760 creator d4 maticna plosca podnozje pc intel faktor oblike podrobnosti atx asset conrad media10 add 160267

c1 de 861028258DS00 nabo |||

ASUS **PROART B760-CREATOR D4**, Intel, LGA 1700, Intel Celeron, Intel CoreTM i3, Intel CoreTM i5, Intel CoreTM i7, Intel CoreTM i9,..., LGA 1700, DDR4SDRAM, 128 GB **PROART B760-CREATOR D4** Mainboard Sockel Intel LGA1700 ATX PCIe 5.0 - DDR4 Speicher - 3x M.2 - USB 3.2 Gen2x2 - fr Content Creator Gruppe...

lang:de **score:51** filesize: 69.35 K page_count: 2 document date: 2023-05-01

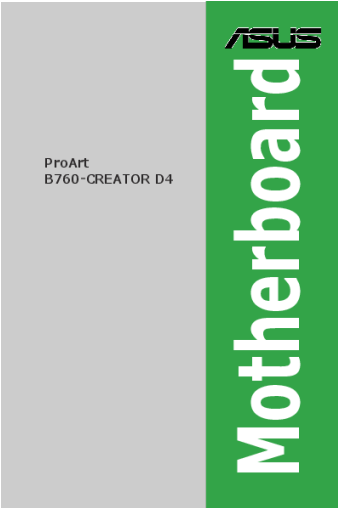

[pdf] User Manual Documentation Warranty

ProArt B760 CREATOR D4 mmo 108645235 1675953395 729 17591 shoprbc images products rbc icecat

documents 235 |||

Motherboard ProArt B760-CREATOR D4 E21433 First Edition November 2022 Copyright 2022 ASUSTeK COMPUTER INC. All Rights Reserved. No part of this manual, including the products and software described in it, may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated in...

lang:en **score:50** filesize: 2.43 M page_count: 42 document date: 2022-11-30



lang:de score:44 filesize: 479.98 K page_count: 1 document date: 2023-08-01

[\[pdf\]](#) Label

MOTHERBOARD Nov 2023 Mail In Rebate ASUSROG STRIX Z790 E GAMING WIFI 195553938532 \$30 00 TUF B760 PLUS D4 197105009493 X570 WI FI ASUS MIR Nov23 MBcentralcomputer pub media ASUS MB srsltid AfmBOorLfFiFOI1hJPG7gO aEdYdc2JdhjFQnP8sAYkKKg n6T3yPQvYy USMOTHERBOARD ROG MBASUS AfmBOooSdXyZ6gBDf5X62UlkFlvA5SCQpYkr9ogGcar W22ZBHuCrZ1centralcomputer B550 F II 195553453318 ROG A GAMING ROG AfmBOory73UEKyJaoaCuZBYXIRL Hek gzVm2KGNZCgleNqHnJUEdSiocentralcomputer Z690 I 195553460965 Fulfillment of this rebate is subject to final approval by ASUSROG AfmBOooVZowinH7tmlh6QnH5Bu3u 0ENzKunu1nyOsC9fCjgIKG6Mw1Acentralcomputer ASUSHow Claim Your 1 Register at asusmir with Offer Code ASU 102300203 US 2 Only s per qualifying product ROG AfmBOorJL4BUU2NXQfTcBnRxPQFCnvumG7pzBgDNMICVPrd7432imPqxcentralcomputer product PRIME 195553970303 PRIME Z790M AfmBOopnhlj4dD uSCkuKx86EpcHTxoCeZ mgKp1H8TVogZ9WB0h4 2centralcomputer 192876388495ROG AfmBOopS VxxovFWpn4

nVmw23KsAHA4JysoscuCmD17BaW5EyPvjFK9centralcomputer AfmBOoo5aGrF WYUb1 1Kn2jHh0omxwCE m
qifl fkkbYSAjcd5fDD6centralcomputer AfmBOoo62AsJ7qzol 518S58CgVnmhNwld99TgBTPNa
YOC0YkYmZizcentralcomputer ASUSPRIME Reward ROG AfmBOoqgyBoQ5AbVP

YtTDEalxU9KFJV8KfPwXrRtkrmH6qqowAC81ti2centralcomputer Reward TUF 192876388495 How at ROG
AfmBOoq23HMGmOPpkkKy5mN453DGkpfXkHMnKwCMLCLR9gChcL3RbM8mcentralcomputer ||| |||

MOTHERBOARD Nov 2023 Mail-In Rebate -- US Promotion Period: 11/23/2023 - 11/27/2023 Model Name UPC
Number PRIME B760-PLUS D4 195553970303 PRIME Z790M-PLUS D4 195553936682 PROART B760-
CREATOR D4 197105017856 ROG CROSSHAIR X670E HERO 19555386 ||| MOTHERBOARD Nov 2023 Mail-In
Rebate -- US Promotion Period: 11/23/2023 - 11/27/2023 Model Name UPC Number PRIME B760-PLUS D4
195553970303 PRIME Z790M-PLUS D4 195553936682 PROART B760-CREATOR D4 197105017856 ROG
CROSSHAIR X670E HERO 19555386 ||| MOTHERBOARD Nov 2023 Mail-In Rebate -- US Promotion Period:

11/23/2023 - 11/27/2023 Model Name UPC Number PRIME B760-PLUS D4 195553970303 PRIME Z790M-PLUS D4 195553936682 PROART B760-CREATOR D4 197105017856 ROG CROSSHAIR X670E HERO 19555386 ||| MOTHERBOARD Nov 2023 Mail-In Rebate -- US Promotion Period: 11/23/2023 - 11/27/2023 Model Name UPC Number PRIME B760-PLUS D4 195553970303 PRIME Z790M-PLUS D4 195553936682 PROART B760-CREATOR D4 197105017856 ROG CROSSHAIR X670E HERO 19555386 ||| MOTHERBOARD Nov 2023 Mail-In Rebate -- US Promotion Period: 11/23/2023 - 11/27/2023 Model Name UPC Number PRIME B760-PLUS D4


195553970303 PRIME Z790M-PLUS D4 195553936682 PROART B760-CREATOR D4 197105017856 ROG CROSSHAIR X670E HERO 19555386 ||| MOTHERBOARD Nov 2023 Mail-In Rebate -- US Promotion Period: 11/23/2023 - 11/27/2023 Model Name UPC Number PRIME B760-PLUS D4 195553970303 PRIME Z790M-PLUS D4 195553936682 PROART B760-CREATOR D4 197105017856 ROG CROSSHAIR X670E HERO 19555386 ||| MOTHERBOARD Nov 2023 Mail-In Rebate -- US Promotion Period: 11/23/2023 - 11/27/2023 Model Name UPC Number PRIME B760-PLUS D4 195553970303 PRIME Z790M-PLUS D4 195553936682 PROART B760-

CREATOR D4 197105017856 ROG CROSSHAIR X670E HERO 19555386 ||| MOTHERBOARD Nov 2023 Mail-In Rebate -- US Promotion Period: 11/23/2023 - 11/27/2023 Model Name UPC Number PRIME B760-PLUS D4 195553970303 PRIME Z790M-PLUS D4 195553936682 PROART B760-CREATOR D4 197105017856 ROG CROSSHAIR X670E HERO 19555386 ||| MOTHERBOARD Nov 2023 Mail-In Rebate -- US Promotion Period: 11/23/2023 - 11/27/2023 Model Name UPC Number PRIME B760-PLUS D4 195553970303 PRIME Z790M-PLUS D4 195553936682 PROART B760-CREATOR D4 197105017856 ROG CROSSHAIR X670E HERO 19555386 |||

MOTHERBOARD Nov 2023 Mail-In Rebate -- US Promotion Period: 11/23/2023 - 11/27/2023 Model Name UPC
Number PRIME B760-PLUS D4 195553970303 PRIME Z790M-PLUS D4 195553936682 PROART B760-
CREATOR D4 197105017856 ROG CROSSHAIR X670E HERO 19555386

MOTHERBOARD Nov 2023 Mail-In Rebate -- US Promotion Period: 11/23/2023 - 11/27/2023
Model Name UPC Number PRIME B760-PLUS D4 195553970303 PRIME Z790M-PLUS D4
195553936682 **PROART B760-CREATOR D4** 197105017856 ROG CROSSHAIR X670E
HERO 195553862424 ROG STRIX B550-F GAMING WIFI II 195553453318 ...

lang:en score:38 filesize: 21.96 K page count: 1 document date: 2023-10-24

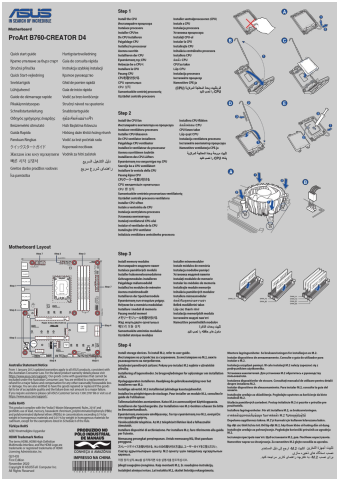


[pdf] Guide

Kurzanleitung ASUS ProArt B760 Creator D4 Preisvergleich Geizhals Deutschland
6b39e88286c1330f80e82e9f5e2a9922dae3 gzhls at blob ldb f a c 7 Quick guide |||

...

lang:en score:35 filesize: 1.22 M page_count: 0 document date: 0000-00-00

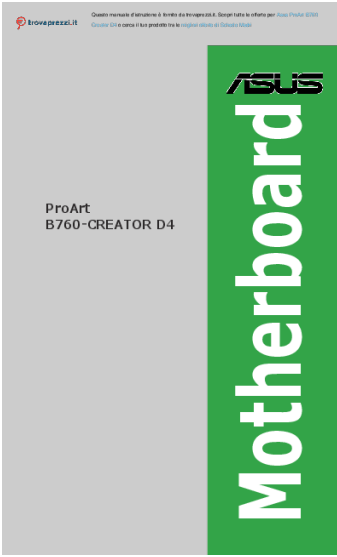


[pdf]

asus proart b760 creator d4 trovaprezzi it manuali |||

...

lang:en score:27 filesize: 2.45 M page_count: 42 document date: 2022-11-30

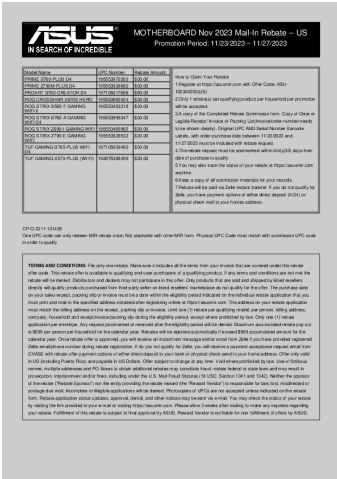

ASUS Motherboard Mail-In Rebate - November 2023 US Promotion

Claim your ASUS motherboard mail-in rebate for eligible models purchased between November 23-27, 2023. Learn how to register, submit your claim, and understand the terms and conditions for this US promotion.

lang:en score:27 filesize: 27.17 K page_count: 1 document date: 2023-11-08

Niniejsza promocja – „ASUS x Intel zabierze Cię – Call of Duty” została przeprowadzona przez ASUS Global Pte. Ltd. („ASUS”) i sponsorowanych partnerów. Biorąc w niej udział, klienci zgadzają się na poniższe Zasady i warunki („ZW”) (artykuł 9: „Wyrażasz zgodę”

Niniejsza promocja – „ASUS x Intel zabierze Cię – Call of Duty” została przeprowadzona przez ASUS Global Pte. Ltd. („ASUS”) i sponsorowanych partnerów. Biorąc w niej udział, klienci zgadzają się na poniższe Zasady i warunki („ZW”) (artykuł 9: „Wyrażasz zgodę”

1. Uregulowania prawne

Najdobre reguły dotyczące zwrotu środków i utraty, łącznie z Zasadami i warunkami uczestnictwa z usług ASUS, Polityką prywatności ASUS i Zasadami i warunkami dla konsumentów dotyczące zestawu sprzętu naszego Intel® Core i7.

(<https://softwareoffer.intel.com/Campaign/Terms/34965255-7DF7-4FC4-9E26-DD230138DA4B>) stanowiąca część niniejszego Zasad i warunków. Biorąc udział w

2. Rozpoczęcie i okres promocji

Prosimy o zapoznanie się o godzinie 00:01 czasu środkowoeuropejskiego („CET”) dnia 02.05.2013 i losować się o godzinie 23:59 CET dnia 12.06.2013 („ostatni termin promocji”). Zestaw produktów objętych promocją (patrz: Zestaw produktów objętych promocją) musi zostać zrealizowany w spójnym zakresie (patrz: lista objętych produktów promocji) w „ostatniej promocji” odbytej na terenie „obszaru objętego promocją”.

Wszelkie zakupy od dystrybutorów z siedzibą na „obszarze objętym promocją” mogą zostać zgromadzone do udziału w promocji.


Wszelkie testy i produkty sprzedawane do udziału w promocji (wyszczególnione w załączniku „Zestawy produktów objętych promocją”) muszą zostać zakupione w okresie od 02.05.2013 do 12.06.2013 na podstawie dowodu: listu lub w sklepie na okazanie objętych promocją (załącznik „Oznaki objętych promocją”).

3. Prawo do wzięcia udziału

Pracownicy spółki ASUS, pracownicy oddziałów ASUS i/lub partnerzy, czy też firmy i agenci, nie współpracujące, sprzedawcy, dystrybutorzy, a także ich pracownicy nie mogą wykluczać z udziału w tej promocji. Ponadto klienci nieposługujący kartami lojalnościowymi również nie wykluczać z udziału w tej promocji.

Uczestniczący w promocji muszą być rezydencjami (posiadać stałe zameldowanie) w kraju zamieszkiwać stałe na obszarze objętym promocją. Udział w promocji jest bezpłatny.

4. Przedmiot promocji i zasady udziału w promocji

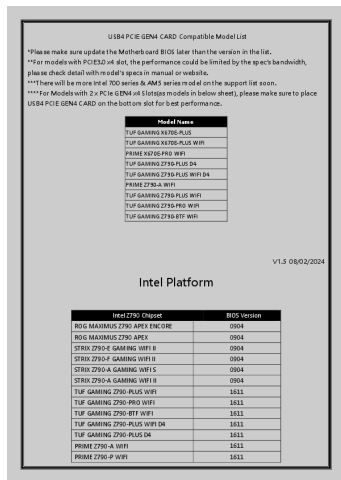

[\[pdf\]](#)

Klaudia Tarkowska Rodak Regulamin Akcji promocyjnej „Kup płytę główną Asus i Sep 4 2024 — 1 Postanowienia
ogólne Niniejszy zwany dalej „Regulaminem określa warunki zasady na jakich odbywa się Akcja promocyjna pod
nazwą 09 04 zgarnij voucher regulamin media komputerik plimg opisy produktów regulaminy odbierzPRIME
B760M K 150 PRIME D4 R PROART B760 CREATOR WIFI 300 300Sep

„KupH9O3F8J0S0z0e1A7g2q5K4P6R1K786U82024 regulaminsferis H9O3F8J0S0z0e1A7g2q5K4P6R1K786U8
srsltid AfmBOoq 6lnR5nNhoTZHgrOB6 q oqkAgkvBYMhyj5 tyUtrXiGiyyfmedia odbierzRegulamin 300TUF
GAMING BTF TUF PLUS II TUF Sep „Kup2024 tyUtrXiGiyyfsferis AfmBOop2JTqVkJNoji1qsuV6F71uE0
30KsZkah52DLU2N5MjSZHhIXNFmedia TUF Dedykowaną dla gło wną odbierz eVoucher Pluxee jest strona
internetowa adresem asuspromocje Sep 30KsZkah52DLU2N5MjSZHhIXNFsferis AfmBOoqSKyg9mPGMixz6X
wEb4x 2b85mJf cqR0Si PWq4aLg1hAOvEmedia PROART ROG STRIX F A I STRIX Sep PWq4aLg1hAOvEsferis
TNQeRE8rX3YAuwHv3ssXPV4uUz10Sxy1 TkGfSVM72W4THmedia STRIX TUF TkGfSVM72W4THsferis
AfmBOopY8BlsgCnTkKWTDLAgGavx1 pZACr32cWgjPmsEqJ OPCK4BX6media TUF PRIME 150Sep
OPCK4BX6sferis AfmBOopq CjuCca2L5yyOiUvOhHyApaDa7r6mpP5e5krGAHjICl30 WJmedia PluxeePRIME
„KupROG MAXIMUS Z790 HERO E F 2024 regulaminasuspromocja pluxee ||| ||| Regulamin Akcji promocyjnej

„Kup płyt glwn Asus i odbierz eVoucher Pluxee 1 Postanowienia ogłne 1. Niniejszy Regulamin zwany dalej „Regulaminem”, określa warunki i zasady na jakich odbywa się Akcja promocyjna pod nazw „Kup płyt glwn Asus ||| Regulamin Akcji promocyjnej „Kup płyt glwn Asus i odbierz eVoucher Pluxee 1 Postanowienia ogłne 1. Niniejszy Regulamin zwany dalej „Regulaminem”, określa warunki i zasady na jakich odbywa się Akcja promocyjna pod nazw „Kup płyt glwn Asus ||| Regulamin Akcji promocyjnej „Kup płyt glwn Asus i odbierz eVoucher Pluxee 1

Postanowienia ogólne 1. Niniejszy Regulamin zwany dalej „Regulaminem”, określa warunki i zasady na jakich odbywa się Akcja promocyjna pod nazwą „Kup płyt głównych Asus ||| Regulamin Akcji promocyjnej „Kup płyt głównych Asus i odbierz eVoucher Pluxee 1 Postanowienia ogólne 1. Niniejszy Regulamin zwany dalej „Regulaminem”, określa warunki i zasady na jakich odbywa się Akcja promocyjna pod nazwą „Kup płyt głównych Asus ||| Regulamin Akcji promocyjnej „Kup płyt głównych Asus i odbierz eVoucher Pluxee 1 Postanowienia ogólne 1. Niniejszy Regulamin zwany dalej „Regulaminem”, określa warunki i zasady na jakich odbywa się Akcja promocyjna pod nazwą „Kup płyt głównych Asus ||| Regulamin Akcji promocyjnej „Kup płyt głównych Asus i odbierz eVoucher Pluxee 1 Postanowienia ogólne 1.

Niniejszy Regulamin zwany dalej „Regulaminem”, określa warunki i zasady na jakich odbywa się Akcja promocyjna pod nazwą „Kup płyt głównych Asus ||| Regulamin Akcji promocyjnej „Kup płyt głównych Asus i odbierz eVoucher Pluxee 1 Postanowienia ogólne 1. Niniejszy Regulamin zwany dalej „Regulaminem”, określa warunki i zasady na jakich odbywa się Akcja promocyjna pod nazwą „Kup płyt głównych Asus

Regulamin Akcji promocyjnej „Kup płyt głównych Asus i odbierz eVoucher Pluxee 1 Postanowienia ogólne ... FI D4 300 TUF GAMING B760M-PLUS 300 TUF GAMING B760M-PLUS D4 300 TUF GAMING B760M-E D4 300 **PROART B760-CREATOR D4 300 ROG STRIX B760-F GAMING WIFI 300 ROG STRIX B760-A GAMING WIFI 300 R...**

lang:pl score:23 filesize: 222.15 K page count: 6 document date: 2024-08-28

Thunderbolt II PCI-e Card Compatible Model List	
Intel Z80 Chipset	
ROG MAXIMUS Z790 APEX	ROG MAXIMUS Z790 APEX ENCORE
ROG STRIX Z790-E GAMING WIFI	ROG STRIX Z790-E GAMING WIFI II
ROG STRIX Z790-F GAMING WIFI	ROG STRIX Z790-F GAMING WIFI II
ROG STRIX Z790-H GAMING WIFI	ROG STRIX Z790-H GAMING WIFI II
ROG STRIX Z790-H GAMING WIFI D4	PRIME Z790-A WIFI
ROG STRIX Z790-H GAMING WIFI	PRIME Z790-A WIFI II
TUF GAMING Z790 PLUS D4	PRIME Z790-P
TUF GAMING Z790 PRO WIFI	PRIME Z790-P D4
TUF GAMING Z790 PRO WIFI II	PRIME Z790M PLUS D4
TUF GAMING Z790 PLUS WIFI D4	
Intel B760 Chipset	
ProArt 12B-128GB D4	TUF GAMING B760 PLUS WIFI
PRIME B760 D4	TUF GAMING B760 PLUS WIFI D4
PRIME B760 PLUS	TUF GAMING B760M PLUS D4
TUF GAMING B760 PLUS WIFI	TUF GAMING B760M PLUS D4
TUF GAMING B760 PLUS WIFI II	ROG STRIX B760 GAMING WIFI
ROG STRIX B760 GAMING WIFI	ROG STRIX B760 GAMING WIFI II
ROG STRIX B760 GAMING WIFI D4	
Intel Q770 Chipset	
ProArt 12Q-128GB D4	PRIME Q770 PLUS
TUF GAMING Q770 PRO WIFI	PRIME Q770 PLUS D4
Intel Z890 Chipset	
ROG MAXIMUS Z890 APEX	PRIME Z890-A
ROG STRIX Z890-E GAMING WIFI	PRIME Z890-A WIFI
ROG STRIX Z890-F GAMING WIFI	PRIME Z890-F WIFI D4
ROG STRIX Z890-H GAMING D4	PRIME Z890-P
ROG STRIX Z890-H GAMING WIFI	PRIME Z890-P D4
TUF GAMING Z890 PLUS WIFI D4	PRIME Z890M PLUS D4
TUF GAMING Z890 PLUS D4	
Intel W890 Chipset	
Pro WS W890-AE FRB	Pro WS W890-AE

[pdf]

Klaudia Tarkowska Rodak Regulamin Akcji promocyjnej „Kup płytę główną Asus i odbierz Feb 12 2024 · Z790 TUF GAMING PLUS WIFI D4 250 zł PRIME A P 250 O295n8h1r0S0l1z7o0W7Y9p241e185a3 srsltid

AfmBOopxJR82V5w38B6DbLxO 5XqvUOuU6RKnnZITD7k3B5Jkmlnb0n sferis pl 250 Feb gło wnej B760 lub z

załączonej do niniejszego Regulaminu listy płyt B760M 125 D4Feb K Feb II GAMING Feb BTF ROG STRIX I G

TUF Feb F E złFeb B760 TUF gło gło GAMING PRIME PROART CREATOR R

PROART O295n8h1r0S0l1z7o0W7Y9p241e185a3 AfmBOoqKDfpe5S4

YGZPmnUA84vIQb0b44wYOfu4s8oChddbZUqzDplPO295n8h1r0S0l1z7o0W7Y9p241e185a3

AfmBOopfXfQUqeZ8vI7F9ArnMzLLFrFfpwRBxoO05duzXXxkTRy IvKNO295n8h1r0S0l1z7o0W7Y9p241e185a3

AfmBOop8vPgRd9Th1QkEjav2k5f2GJyH3q3i1aGiaxLgXurcPWqy5ZMHO295n8h1r0S0l1z7o0W7Y9p241e185a3

AfmBOooZFyfmn8U1XoVG04GQxg8Vl8IEbOt B bzhjhUV65zNAfmPk1ZO295n8h1r0S0l1z7o0W7Y9p241e185a3

AfmBOoqpRVhfVFH2fyP0dUJ7pF6 rLQSOQLnaSWL8GmUhYSyXFhP

0jGO295n8h1r0S0l1z7o0W7Y9p241e185a3 AfmBOoqpmGaqS84Vd5v Twh1B6TLBwVqutLetNPK3b7OdmQJLu 5

fDuO295n8h1r0S0l1z7o0W7Y9p241e185a3

AfmBOopEpVnsX1JcBgF8C0r1kBVs1ZT6FWlovSyuZVdOdNhFqM0qoZevO295n8h1r0S0l1z7o0W7Y9p241e185a3

AfmBOooOG7qmYK4AjdpVdb9Q CYJoF0kaq4YSgvKd37jpX KHEx3vOKkO295n8h1r0S0l1z7o0W7Y9p241e185a3

AfmBOopAK2KrL7OLYOTcqBKpuwhwUxH9y852S2dPCMZtgXf0M

hcDs8WO295n8h1r0S0l1z7o0W7Y9p241e185a3

AfmBOool07CR6ER8GMAtdwqBqwn4hv0UWhaPRZj0p7os8qoCOnw40X

QO295n8h1r0S0l1z7o0W7Y9p241e185a3 AfmBOoqEy0q6dqhpSAlH3N4J Ok qEawRUqweuSa0r

8JnYs453MQRnO295n8h1r0S0l1z7o0W7Y9p241e185a3 AfmBOoolq4pLYtxAPXoiwtfdRwt8

7MUMzg0fW8a8c5Pu50Hues42zwO295n8h1r0S0l1z7o0W7Y9p241e185a3

AfmBOopuqndv9dpQYgh1n7M8ITUZpcuN5h3q6TNP64RPIr9v4pFJQykJO295n8h1r0S0l1z7o0W7Y9p241e185a3

AfmBOoqepF7eQNY7oQP5yBWEjZHJlzuVERYak3eahTH0zUqswwD8Bp6O295n8h1r0S0l1z7o0W7Y9p241e185a3

AfmBOor59 7 qeFVve j5PffkPz321kfFuQgdSOykXudo5Jzaom8irdsferis

5XqvUOuU6RKnnZITD7k3B5Jkmlnb0nsferis YGZPmnUA84vIQb0b44wYOfu4s8oChddbZUqzDplPsfers IvKNsferis

AfmBOop8vPgRd9Th1QkEjav2k5f2GJyH3q3i1aGiaxLgXurcPWqy5ZMHsferis bzhjhUV65zNAfmPk1Zsferis

0jGsferis fDusferis AfmBOopEpVnsX1JcBgF8C0r1kBVs1ZT6FWlovSyuZVdOdNhFqM0qoZevsferis

KHEx3vOKksferis hcDs8Wsferis Qsferis 8JnYs453MQRnsferis 7MUMzg0fW8a8c5Pu50Hues42zwsferis

AfmBOopuqndv9dpQYgh1n7M8ITUZpcuN5h3q6TNP64RPIr9v4pFJQykJsferis

AfmBOoqepF7eQNY7oQP5yBWEjZHJlzuVERYak3eahTH0zUqswwD8Bp6sferis AfmBOoq

q382Wjb1zgUHguv16wtfj4gBOZenYx2m6n47w T nBkZ2dF5 PROART gło

GAMING O295n8h1r0S0l1z7o0W7Y9p241e185a3 nBkZ2dF5sferis AfmBOorXcntWY1hq8

qW0LH4eYgmkgmp0vQqlvtqWQeaQKbuscZo8gFp STRIX gło AfmBOopcRA6NMOkgJB24xBcAK3nf

LsjN4Uhjfz9RoALRQb3sZhvEU0bsferis ||| ||| Regulamin Akcji promocyjnej „Kup płyt glwn Asus i odbierz eVoucher

Pluxee 1 Postanowienia ogłne 1. Niniejszy Regulamin zwany dalej „Regulaminem , określa warunki i zasady na

jakich odbywa si Akcja promocyjna pod nazw „Kup płyt glwn Asus ||| Regulamin Akcji promocyjnej „Kup płyt glwn

Asus i odbierz eVoucher Pluxee 1 Postanowienia ogłne 1. Niniejszy Regulamin zwany dalej „Regulaminem ,

określa warunki i zasady na jakich odbywa si Akcja promocyjna pod nazw „Kup płyt glwn Asus ||| Regulamin Akcji

promocyjnej „Kup płyt glwn Asus i odbierz eVoucher Pluxee 1 Postanowienia ogłne 1. Niniejszy Regulamin zwany

dalej „Regulaminem , określa warunki i zasady na jakich odbywa si Akcja promocyjna pod nazw „Kup płyt glwn

Asus


Regulamin Akcji promocyjnej „Kup płyt glwn Asus i odbierz eVoucher Pluxee 1 Postanowienia

ogłne ... US TUF GAMING B760M-PLUS D4 TUF GAMING B760M-E D4 PRIME B760-PLUS

PRIME B760M-K PROART B760-CREATOR **PROART B760-CREATOR D4** ROG STRIX

B760-F GAMING WIFI ROG STRIX B760-A GAMING WIFI ROG STRIX B760-I GA...

lang:pl score:23 filesize: 234.42 K page_count: 6 document date: 2024-02-06

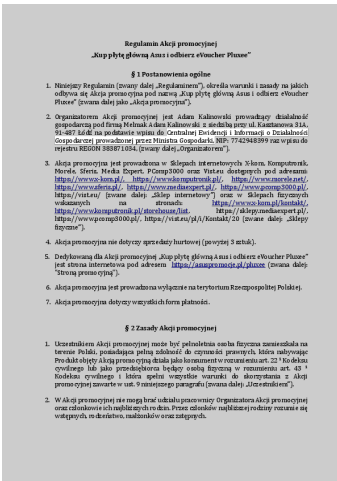

ThunderboltEX4 Card Compatible Model List	
Intel Z790 Chipset	
ROG MAXIMUS Z790 APEX	PRIME Z790-A WIFI
ROG STRIX Z790-E GAMING WIFI	PRIME Z790-P WIFI
ROG STRIX Z790-F GAMING WIFI	PRIME Z790-P
ROG STRIX Z790-A GAMING WIFI	PRIME Z790-P WIFI D4
ROG STRIX Z790-A GAMING WIFI D4	PRIME Z790-P D4
ROG STRIX Z790-A GAMING WIFI D4	PRIME Z790-P PLUS D4
TUF GAMING Z790-PLUS D4	TUF GAMING Z790-PLUS WIFI D4
Intel B760 Chipset	
ProArt B760-CREATOR D4	TUF GAMING B760-PLUS WIFI
PRIME B760-PLUS D4	TUF GAMING B760-PLUS WIFI D4
PRIME B760-PLUS	TUF GAMING B760-PLUS WIFI D4
TUF GAMING B760M-PLUS WIFI	TUF GAMING B760M-PLUS D4
TUF GAMING B760M-PLUS	ROG STRIX B760-E GAMING WIFI
ROG STRIX B760-E GAMING WIFI D4	ROG STRIX B760-E GAMING WIFI
ROG STRIX B760-A GAMING WIFI D4	
Intel H770 Chipset	
Prime H770-PLUS D4	Prime H770-PLUS
TUF GAMING H770-PRO WIFI	
Intel B580 Chipset	
ROG MAXIMUS Z580 APEX	PRIME Z580-A
ROG STRIX Z580-E GAMING WIFI	PRIME Z580-P WIFI
ROG STRIX Z580-F GAMING WIFI	PRIME Z580-P WIFI D4
ROG STRIX Z580-A GAMING D4	PRIME Z580-P
ROG STRIX Z580-E GAMING D4	PRIME Z580-P D4
TUF GAMING Z580-PLUS WIFI D4	PRIME Z580M-PLUS D4
TUF GAMING Z580-PLUS D4	
Intel H570 Chipset	
Pro HS V580-ACE IP68	Pro HS V580-ACE
Intel B660 Chipset	
ROG STRIX B660-F GAMING WIFI	TUF GAMING B660M-PLUS WI-FI
ROG STRIX B660-A GAMING WIFI	TUF GAMING B660M-PLUS D4
ROG STRIX B660-A GAMING WIFI D4	TUF GAMING B660M-PLUS D4
ROG STRIX B660-E GAMING WIFI	PRIME B660-CREATOR D4
TUF GAMING B660-PLUS WIFI D4	PRIME B660-PLUS D4
TUF GAMING B660-PLUS D4	
Intel H670 Chipset	
TUF GAMING H670-PRO WIFI D4	PRIME H670-PLUS D4
Intel Z580 Chipset	Intel H570 and B550 Chipset
ROG MAXIMUS Z580 APEX	TUF GAMING H670-PRO WIFI

[pdf]

Sylvia Hsiao Intel Z790 Chipset ASUS Feb 17 2023 — ROG MAXIMUS APEX PRIME A WIFI STRIX E GAMING P F ThunderboltEX 4 Card Compatible Model List add B760 strix 20230217 model dlcdnets asus pub mb Add on card |||

ThunderboltEX 4 Card Compatible Model List Intel Z790 Chipset ROG MAXIMUS Z790 APEX PRIME Z790-A WIFI ROG STRIX Z790-E GAMING WIFI PRIME Z790-P WIFI ROG STRIX Z790-F GAMING WIFI PRIME Z790-P ROG STRIX Z790-A GAMING WIFI PRIME Z790-P WIFI D4 ROG STRIX Z790-A GAMING WIFI D4 PRIME Z790-P D4 ...

lang:nl score:23 filesize: 283.16 K page_count: 2 document date: 2023-02-17

ThunderboltEX4 Card Compatible Model List	
Intel Z790 Chipset	
ROG MAXIMUS Z790 APEX	PRIME Z790-A WIFI
ROG STRIX Z790-E GAMING WIFI	PRIME Z790-P WIFI
ROG STRIX Z790-F GAMING WIFI	PRIME Z790-P
ROG STRIX Z790-A GAMING WIFI	PRIME Z790-P WIFI D4
ROG STRIX Z790-A GAMING WIFI D4	PRIME Z790-P D4
TUF GAMING Z790-PLUS WIFI D4	PRIME Z790M-PLUS D4
TUF GAMING Z790-PLUS D4	
Intel B760 Chipset	
ProArt B760-CREATOR D4	TUF GAMING B760-PLUS WIFI
PRIME B760-PLUS D4	TUF GAMING B760-PLUS WIFI D4
TUF GAMING B760M-PLUS WIFI	TUF GAMING B760M-PLUS D4
TUF GAMING B760M-PLUS	TUF GAMING B760M-PLUS D4
Intel H770 Chipset	
Prime H770-PLUS D4	Prime H770-PLUS
TUF GAMING H770-PRO WIFI	
Intel Z580 Chipset	
ROG MAXIMUS Z580 APEX	PRIME Z580-A
ROG STRIX Z580-E GAMING WIFI	PRIME Z580-P WIFI
ROG STRIX Z580-F GAMING WIFI	PRIME Z580-P WIFI D4
ROG STRIX Z580-A GAMING D4	PRIME Z580-P
ROG STRIX Z580-E GAMING D4	PRIME Z580-P D4
TUF GAMING Z580-PLUS WIFI D4	PRIME Z580M-PLUS D4
TUF GAMING Z580-PLUS D4	
Intel H570 Chipset	
Pro HS V580-ACE IP68	Pro HS V580-ACE
Intel B660 Chipset	
ROG STRIX B660-F GAMING WIFI	TUF GAMING B660M-PLUS WI-FI
ROG STRIX B660-A GAMING WIFI	TUF GAMING B660M-PLUS WI-FI D4
ROG STRIX B660-A GAMING WIFI D4	TUF GAMING B660M-PLUS D4
ROG STRIX B660-E GAMING WIFI	PRIME B660-CREATOR D4
TUF GAMING B660-PLUS WIFI D4	PRIME B660-PLUS D4
TUF GAMING B660-PLUS D4	
Intel H670 Chipset	
TUF GAMING H670-PRO WIFI D4	PRIME H670-PLUS D4
Intel Z580 Chipset	Intel H570 and B550 Chipset
ROG MAXIMUS Z580 APEX	TUF GAMING H670-PRO
ROG STRIX Z580-E GAMING WIFI	
ROG STRIX Z580-F GAMING WIFI	
ROG STRIX Z580-A GAMING WIFI	
ROG STRIX Z580-E GAMING WIFI	
TUF GAMING Z580-PLUS WIFI	ROG STRIX B660-E GAMING WIFI
TUF GAMING Z580-PLUS D4	

[pdf]

Sylvia Hsiao ThunderboltEX 4 Card Compatible Model List Intel Web Jan 9 2023 · rog strix x670e f gaming wifi tuf plus a prime pro x670 p amd 650 hipset ThunderboltEX4 add B760 and H770 20230109 model dlcdnets asus pub ASUS mb Add on card |||

ThunderboltEX 4 Card Compatible Model List Intel Z790 Chipset ROG MAXIMUS Z790 APEX PRIME Z790-A WIFI ROG STRIX Z790-E GAMING WIFI PRIME Z790-P WIFI ROG STRIX Z790-F GAMING WIFI PRIME Z790-P ROG STRIX Z790-A GAMING WIFI PRIME Z790-P WIFI D4 ROG STRIX Z790-A GAMING WIFI D4 PRIME Z790-P D4 ...

lang:nl score:23 filesize: 272.63 K page_count: 2 document date: 2023-01-10

ThunderboltEX4 Card Compatible Model List	
Intel Z790 Chipset	
ROG MAXIMUS Z790 APEX	PRIME Z790-A WIFI
ROG STRIX Z790-E GAMING WIFI	PRIME Z790-P WIFI
ROG STRIX Z790-F GAMING WIFI	PRIME Z790-P
ROG STRIX Z790-A GAMING WIFI	PRIME Z790-P WIFI D4
ROG STRIX Z790-A GAMING WIFI D4	PRIME Z790-P D4
TUF GAMING Z790-PLUS WIFI D4	PRIME Z790M-PLUS D4
TUF GAMING Z790-PLUS D4	
Intel B760 Chipset	
ProArt B760-CREATOR D4	TUF GAMING B760-PLUS WIFI
PRIME B760-PLUS D4	TUF GAMING B760-PLUS WIFI D4
PRIME B760-PLUS	TUF GAMING B760M-PLUS D4
TUF GAMING B760M-PLUS WIFI	TUF GAMING B760M-PLUS D4
TUF GAMING B760M-PLUS	ROG STRIX B760-E GAMING WIFI
ROG STRIX B760-E GAMING WIFI D4	
Intel H770 Chipset	
Prime H770-PLUS D4	Prime H770-PLUS
TUF GAMING H770-PRO WIFI	
Intel Z580 Chipset	
ROG MAXIMUS Z580 APEX	PRIME Z580-A
ROG STRIX Z580-E GAMING WIFI	PRIME Z580-P WIFI
ROG STRIX Z580-F GAMING WIFI	PRIME Z580-P WIFI D4
ROG STRIX Z580-A GAMING D4	PRIME Z580-P
ROG STRIX Z580-E GAMING D4	PRIME Z580-P D4
TUF GAMING Z580-PLUS WIFI D4	PRIME Z580M-PLUS D4
TUF GAMING Z580-PLUS D4	
Intel H570 Chipset	
Pro HS V580-ACE IP68	Pro HS V580-ACE
Intel B660 Chipset	
ROG STRIX B660-F GAMING WIFI	TUF GAMING B660M-PLUS WI-FI
ROG STRIX B660-A GAMING WIFI	TUF GAMING B660M-PLUS WI-FI D4
ROG STRIX B660-A GAMING WIFI D4	TUF GAMING B660M-PLUS D4
ROG STRIX B660-E GAMING WIFI	PRIME B660-CREATOR D4
TUF GAMING B660-PLUS WIFI D4	PRIME B660-PLUS D4
TUF GAMING B660-PLUS D4	
Intel H670 Chipset	
TUF GAMING H670-PRO WIFI D4	PRIME H670-PLUS D4
Intel Z580 Chipset	Intel H570 and B550 Chipset
ROG MAXIMUS Z580 APEX	TUF GAMING H670-PRO WIFI
ROG STRIX Z580-E GAMING WIFI	

[pdf]

Sylvia Hsiao ThunderboltEX 4 Card Compatible Model List Intel Z790 hipset Feb 6 2023 · rog strix x670e f gaming wifi tuf plus a prime pro x670 p amd 650 650e e 650m add B760 20230206 model dlcdnets asus pub ASUS mb Add on card RK 2 RS XLY4iMUq9xA5StqER 8chCF7 Vw |||

ThunderboltEX 4 Card Compatible Model List Intel Z790 Chipset ROG MAXIMUS Z790 APEX PRIME Z790-A WIFI ROG STRIX Z790-E GAMING WIFI PRIME Z790-P WIFI ROG STRIX Z790-F GAMING WIFI PRIME Z790-P ROG STRIX Z790-A GAMING WIFI PRIME Z790-P WIFI D4 ROG STRIX Z790-A GAMING WIFI D4 PRIME Z790-P D4 ...

lang:nl score:22 filesize: 282.31 K page_count: 2 document date: 2023-02-06

*Please make sure to update the Motherboard BIOS to a version later than the one listed.
 **For models with a PCH 32-bit slot, performance is achieved by the specified bandwidth.
 Please refer to the model's specifications in the manual or on the web for further details.
 ***For models with 2+PCIE GEN4 slots (as listed in the table below), please ensure that the USB-PCIE GEN4 card is placed in the bottom slot for optimal performance.
 ****The Intel BIOS version is originally supplied with the first-day BIOS.

V1.0 10/23/2024

Intel Platform	
Intel Z890 Chipset	Support QVL slot
ROG MAXIMUS Z890 APEX	PCIE0M2_1
STRIX Z890-F GAMING WIFI	PCIE0M04
STRIX Z890-F GAMING WIFI	PCIE0M04
STRIX Z890-F GAMING WIFI	PCIE0M04
STRIX Z890-F GAMING WIFI	PCIE0M04
TUF GAMING Z890-PLUS WIFI	PCIE0M04
TUF GAMING Z890-PRO WIFI	PCIE0M04
PRIME Z890-P	PCIE0M04
Z890-AIV GAMING WIFI	PCIE0M04
PRIME Z890-P	PCIE0M04
PRIME STRIX Z890	PCIE0M04

Intel Z390 Chipset	Support PCIe 1.2
ROG MAXIMUS Z390 APEX	POCK1(4) x 2
ROG MAXIMUS Z390 HERO	POCK1(4) x 2
STRIX Z390-E GAMING WIFI	POCK1(4) x 2
STRIX Z390-F GAMING WIFI	POCK1(4) x 2
STRIX Z390-A GAMING WIFI5	POCK1(4) x 2
STRIX Z390-A GAMING WIFI	POCK1(4) x 2
TUF GAMING Z390 PLUS WIFI	POCK1(4) x 2
TUF GAMING Z390-PRO WIFI	POCK1(4) x 2
PRIME Z390-P WIFI	POCK1(4) x 2
Z390 A/W GAMING WIFI	POCK1(4) x 2
PRIME Z390-P	POCK1(4) x 2
PRIME Z390M-PLUS	POCK1(4) x 2

Zasady i warunki – „Back to School Q3 2024” (Promocja Powrót do szkoły III kw. 2024”)

- ## 1. Uregulowania prawne

Niniejsze reguły dotyczące zawrotu i udziału, będące z Zasadami korzystające z ochrony ASU oraz Polityką prywatności ASUS stanowią podstawę stosowanych ZZW. Biorąc udział w promocji, klient zgadza się z postawionymi warunkami uczestnictwa w takiej promocji ZZW. Spółka ASUS nie upoważniona do zmiany stosowanych ZZW, przyczyną zmiany wynagrodzi odpowiedni dowód prowadzący i opłonie na. Osoby biorące udział w promocji muszą zgodzić się na takie zmiany.

- ## 2. Rozpoczęcie i okres promocyjny

Procedura rozpoczyna się o godzinie 00:01 czasu środkowoeuropejskiego („CET”) dnia 13 (03) 2024 i kończy się o godzinie 23:59 CET dnia 23 (09) 2024 („kres promocji”).
 Produkt(y) objęt(y) promocją (pełn: produkty objęte promocją) zniżkową ceną: całość
 subtytuł(y) a) wprowadzającego paradygmat (pełn: lista dystrybutorów paradygmat) w „okresie promocji”
 subtytuł(y) b) „okresie objętych promocją”

Na formularze zgłoszenia uczestnika musi znajdować się data zakupu oraz ważny adres e-mail uczestnika.

Wszelkie produkty kwalifikujące się do udziału w promocji (wyszczególnione w załączniku „produkty objęte promocją”) zostaną zwrotne zamknięte w okresie od 13.03.2024 do 23.09.2024 na podstronie internetowej lub w sklepie na obszarze objętym promocją (załącznik „obszar objęty promocją”).

- ### 3. Prawo do wzięcia udziału

Pracownicy spółki ASUS, pracownicy oddziałów ASUS i/lub partnerzy, czy też firmy i agenci nie współpracujące, sprzedawcy dystrybutorzy, a także ich pracownicy nie są wyłączeni z udziału w tej promocji. Ponadto klienci korporacyjni i stażysty również są wyłączeni z udziału w tej promocji.

Uczestniczący w promocji muszą być rezydencjami (posiadać stałe zameldowanie) w kraju, mającym się na obszarze objętym promocją. Udział w promocji jest bezpłatny.

[\[pdf\]](#) User Manual Specifications

USB4 PCIE GEN4 CARD Compatible Model List *Please make sure to update the Motherboard BIOS to a version later than the one listed. **For models with a PCIe 3.0 x4 slot, performance may be limited by the specifications bandwidth. Please refer to the model s specifications in the manual or on the web...

ASUS Promocja Powrót do Szkoły Q3 2024: Zasady i Warunki Cashback



[\[pdf\]](#)

...

lang:pl score:22 filesize: 2.43 M page count: 42 document date: 2022-11-30

USB4 PCIE GEN4 CARD Compatible Model List

Please ensure that the motherboard BIOS is updated to a version newer than the one listed.
** For models with a PCIe 3.0 x4 slot, performance may be limited by the bandwidth specifications.
Refer to the model's manual or website for detailed specifications.
*** For models with 2 x PCIe GEN4 x4 slots (as listed below), place the USB4 PCie GEN4 card in the bottom slot for optimal performance.
**** The Intel 800 series is supported with the Intel BIOS version.

V1.8 12/3/2024

Model Name

TUF GAMING X670E PLUS

TUF GAMING X670E PLUS WIFI

PRIME X670E PLUS WIFI

TUF GAMING Z790 PLUS D4

TUF GAMING Z790 PLUS PLUS WIFI D4

PRIME Z790-A WIFI

TUF GAMING Z790 PLUS WIFI

TUF GAMING Z790 PRO WIFI

TUF GAMING Z790 PRO WIFI

Intel Platform

Intel Z890 Chipset

Support PCIe slot

ROG MAXIMUS Z890 APEX

PCDNM4L3

ROG MAXIMUS Z890 HERO

PCDKJ444

STRIX Z890-E GAMING WIFI

PCDKJ444

STRIX Z890-F GAMING WIFI

PCDKJ444

STRIX Z890-A GAMING WIFI

PCDKJ444

STRIX Z890-A GAMING WIFI

PCDKJ444

TUF GAMING Z890 PLUS WIFI

PCDKJ444

TUF GAMING Z890 PRO WIFI

PCDKJ444

PRIME Z890-P WIFI

PCDKJ444

2080 AFW GAMING WIFI

PCDKJ444

PRIME Z890-P

PCDKJ444

PRIME Z890A PLUS

PCDKJ444

[pdf] User Manual Specifications

Sylvia Hsiao Intel Platform dldcdnets asus 2 days ago · amd platform 3 trx50 ios version pro ws sage wifi 0701 x670 rog strix x670e e gaming 2124 f 2403 a USB4 PCIE GEN4 CARD Compatible Model List 20241205 Ver 1 8 model pub ASUS mb Add on card |||

USB4 PCIE GEN4 CARD Compatible Model List Please ensure that the motherboard BIOS is updated to a version newer than the one listed. ** For models with a PCIe 3.0 x4 slot, performance may be limited by the bandwidth specifications. Refer to the model s manual or website for detailed specifications. ...

lang:it score:22 filesize: 165.97 K page_count: 4 document date: 2024-12-05

Thunderbolt™ 4 Card Compatible Model List

Intel Z790 Chipset

ROG MAXIMUS Z790 APEX

ROG MAXIMUS Z790 APEX ENCORE

ROG STRIX Z790-E GAMING WIFI

ROG STRIX Z790-E GAMING WIFI II

ROG STRIX Z790-F GAMING WIFI

ROG STRIX Z790-F GAMING WIFI II

ROG STRIX Z790-A GAMING WIFI

ROG STRIX Z790-A GAMING WIFI II

ROG STRIX Z790-A GAMING WIFI D4

PRIME Z790-A WIFI

ROG STRIX Z790-H GAMING WIFI

PRIME Z790-P WIFI

TUF GAMING Z790 PLUS D4

PRIME Z790-P

TUF GAMING Z790 PRO WIFI

PRIME Z790-P WIFI D4

TUF GAMING Z790 PRO WIFI

PRIME Z790-P D4

TUF GAMING Z790 PLUS WIFI D4

PRIME Z790A PLUS D4

TUF GAMING Z790 PLUS WIFI

Intel Z790 Chipset

PRIME Z790-creator wifi

PRIME Z790 PLUS D4

PRIME Z790 PLUS

TUF GAMING Z790M PLUS WIFI

TUF GAMING Z790 PLUS PLUS WIFI

TUF GAMING Z790M PLUS

TUF GAMING Z790M PLUS WIFI D4

TUF GAMING Z790M BT WIFI D4

TUF GAMING Z790M PLUS WIFI D4

TUF GAMING Z790M BT WIFI

TUF GAMING Z790M PLUS

TUF GAMING Z790M PLUS II

ROG STRIX Z790-E GAMING WIFI D4

ROG STRIX Z790-E GAMING WIFI

ROG STRIX Z790-A GAMING WIFI D4

ROG STRIX Z790-E GAMING WIFI

Intel H770 Chipset

PRIME H770 PLUS D4

PRIME H770 PLUS

TUF GAMING H770 PRO WIFI

Intel Z890 Chipset

ROG MAXIMUS Z890 APEX

PRIME Z890-A

ROG STRIX Z890-E GAMING WIFI

PRIME Z890-P WIFI

ROG STRIX Z890-F GAMING WIFI

PRIME Z890-P WIFI D4

ROG STRIX Z890-A GAMING D4

PRIME Z890-P

ROG STRIX Z890-G GAMING WIFI

PRIME Z890-P D4

TUF GAMING Z890 PLUS WIFI D4

PRIME Z890A PLUS D4

TUF GAMING Z890 PLUS D4

ASUS Thunderbolt™ 4 Card Compatible Motherboard List

Discover the official ASUS compatibility list for the Thunderbolt™ 4 expansion card. This guide details compatible motherboards across Intel Z790, B760, H770, Z690, W680, B660, H670, Z590, H570, B560, and AMD B550, X670, B650 chipsets, ensuring seamless integration.

lang:nl score:22 filesize: 102.24 K page_count: 3 document date: 2024-07-15

USB4 PCIE GEN4 CARD Compatible Model List

Please make sure to update the Motherboard BIOS to a version later than the one listed.
**For models with a PCIe 3.0 x4 slot, performance may be limited by the specifications' bandwidth.
Please refer to the model's specifications in the manual or on the website for more details.
***For models with 2 x PCIe GEN4 x4 slots (as listed in the table below), please ensure that the USB4 PCie GEN4 card is placed in the bottom slot for optimal performance.
**** The Intel 800 series is originally supported with the first-day BIOS.

V1.7 10/23/2024

Model Name

TUF GAMING X670E PLUS

TUF GAMING X670E PLUS WIFI

PRIME X670E PLUS WIFI

TUF GAMING Z790 PLUS D4

TUF GAMING Z790 PLUS PLUS WIFI D4

PRIME Z790-A WIFI

TUF GAMING Z790 PLUS WIFI

TUF GAMING Z790 PRO WIFI

TUF GAMING Z790 BT WIFI

Intel Platform

Intel Z890 Chipset

Support PCIe slot

ROG MAXIMUS Z890 APEX

PCDNM4L3

ROG MAXIMUS Z890 HERO

PCDKJ444

STRIX Z890-E GAMING WIFI

PCDKJ444

STRIX Z890-F GAMING WIFI

PCDKJ444

STRIX Z890-A GAMING WIFI

PCDKJ444

STRIX Z890-A GAMING WIFI

PCDKJ444

TUF GAMING Z890 PLUS WIFI

PCDKJ444

TUF GAMING Z890 PRO WIFI

PCDKJ444

PRIME Z890-P WIFI

PCDKJ444

2080 AFW GAMING WIFI

PCDKJ444

PRIME Z890-P

PCDKJ444

PRIME Z890A PLUS

PCDKJ444

USB PCle GEN4 Card Compatible Model List

Please ensure that the motherboard BIOS is updated to a version newer than the one listed below.
**For models with a PCIe 3.0 slot ad, performance may be limited by the bandwidth specifications.
Refer to the model's manual or website for detailed specifications.
***For models with 2 x PCIe slots (as indicated below), please use the initial USB PCle GEN4 card and in the bottom slot for optimal performance.

**The Intel Core i9-12900K is supported with the initial BIOS version.

V1.9 / 2023.03

Model Name	
TUF GAMING B760M PLUS	PCK845H4
TUF GAMING Z690 PLUS WIFI	PCK845H4
PRIME Z690M PLUS WIFI	PCK845H4
TUF GAMING Z790 PLUS D4	PCK845H4
TUF GAMING Z790 PLUS WIFI D4	PCK845H4
PRIME Z790M WIFI	PCK845H4
TUF GAMING Z790 PLUS WIFI	PCK845H4
TUF GAMING Z790 PRO WIFI	PCK845H4
TUF GAMING Z790-EXT WIFI	PCK845H4

Intel Platform

Intel Processor	Support PCH kit
BIG BANGBOM 2300 APES	PCK845H_2
ROG MAXIMUS Z390 HERO	PCK845H4
Z390 A5-A GAMING WIFI	PCK845H4
Z390 A5-A GAMING WIFI	PCK845H4
Z390 A5-A GAMING WIFI S	PCK845H4
Z390 A5-A GAMING WIFI	PCK845H4
TUF GAMING 200 PLUS WIFI	PCK845H4
TUF GAMING 200 PRO WIFI	PCK845H4
PRIME Z390M WIFI	PCK845H4
Z390 AVX GAMING WIFI	PCK845H4
PRIME Z390P	PCK845H4
PRIME Z390A PLUS	PCK845H4



Renforcez votre sécurité, protégez votre vie privée

Ouvrez un nouveau navigateur capable de bloquer les fuites d'ExpressVPN
pour l'achat d'une sélection de produits ASUS



Free installation

Obtenez un essai gratuit exclusif de 90 jours d'ExpressVPN pour l'achat d'une sélection de produits ASUS

Comment ça marche ?

- Achetez un produit ASUS éligible entre le 24 janvier 2024 et le 24 avril 2024 chez un revendeur participant.
- Saisissez les informations requises dans le formulaire de participation entre le 30 janvier 2024 et le 12 mai 2024 sur le site du promoteur.
https://www.asus.com/fr/promotion/global/activity_expressvpn
- Après une courte vérification, vous recevrez un email de confirmation ASUS avec un lien ExpressVPN unique pour activer votre essai gratuit sous 3 jours ouvrables.

*Le client doit être un nouvel utilisateur sans aucun abonnement avec Express VPN pour bénéficier cette offre.

[ASUS et ExpressVPN : Obtenez 90 jours d'essai VPN gratuit avec des produits ASUS sélectionnés](#)

Découvrez comment obtenir un essai gratuit de 90 jours d'ExpressVPN en achetant des produits ASUS éligibles, y compris des moniteurs, des appareils réseau, des cartes mères, des cartes graphiques et plus encore. Apprenez les détails de la promotion et les modèles éligibles.

lang:fr score:21 filesize: 251.2 K page_count: 9 document date: 2024-01-19

ASUS  **ExpressVPN**

Renforcez votre sécurité, protégez votre vie privée

Obtenez un essai gratuit exclusif de 90 jours d'ExpressVPN pour l'achat d'une sélection de produits ASUS



© ASUS Corporation

Obtenez un essai gratuit exclusif de 90 jours d'ExpressVPN pour l'achat d'une sélection de produits ASUS

Comment ça marche ?

1. Recevoir un produit ASUS éligible entre le 24 janvier 2024 et le 21 mars 2024 d'ent un revendeur participant
2. Saisissez les informations requises dans le formulaire de participation entre le 30 janvier 2024 et le 31 mars 2024 sur la page de promotion <http://www.asus.com/finestestoffer/active/ExpressVPN>
3. Après une courte vérification, vous recevrez un email de confirmation ASUS avec un lien ExpressVPN unique pour activer votre essai gratuit sous 3 jours ouvrables

"Je n'ai client dit être un nouveau utilisateur sans aucun abonnement avec Express VPN pour bénéficier cette offre."

[\[pdf\]](#)

Chia Yun huang ACF Obtenez un essai gratuit exclusif de 90 jours d ExpressVPN pour IPROART B760 CREATOR WIFI 4711387275962 PROART 4711387179727 D4 4711387017852 PRO B760M C CSM 4711387014691 CT conditions 93984202403111653007015cdiscount odr imagesok CommercialOffer conditions 93984202403111653007015 |||

Obtenez un essai gratuit exclusif de 90 jours d ExpressVPN pour l achat d une slection de produits A ... 0M-A D4-CSM PRIME B760M-K PRIME B760M-K D4 EX-B760M-V5 PROART B760-CREATOR WIFI PROART B760-CREATOR **PROART B760-CREATOR D4 PRO** B760M-C-CSM PRO B760M-CT-CSM 4711387120002 4711387002896 4711387095119 4...

lang:fr score:21 filesize: 251.37 K page count: 9 document date: 2024-03-08



ASUS

RENTRÉE

AMÉLIOREZ VOTRE ÉQUIPEMENT ET PROTEGEZ VOTRE ÉCRAN PLUS LONGUEMENT

870€ REMBOURSÉ

Offre valable jusqu'au 31 septembre 2024

ASUS

Accédez un produit ASUS éligible et obtenez jusqu'à 870€ de cashback !

Période de promotion : 13 août 2024 - 23 septembre 2024

Période de remboursement : 27 août 2024 - 7 octobre 2024

Comment ça marche ?

1. Achetez un produit ASUS éligible entre le 13 août 2024 et le 23 septembre 2024 auprès d'un marchand participant
2. Saisissez les informations requises dans le formulaire de participation et téléchargez votre facture entre le 27 août 2024 et le 7 octobre 2024
3. Après une brève vérification, vous recevrez votre remboursement directement sur votre compte bancaire

(La validation prend jusqu'à 10 jours ouvrables, après validation, vous recevrez le remboursement dans les 30 jours suivants)

ASUS Cashback Promotion: Get Up to €870

Details of the ASUS cashback promotion offering up to €870 for eligible product purchases.
Learn how to participate and the promotion period.

lang:fr score:20 filesize: 549.26 K page_count: 11 document date: 2024-07-30




[\[pdf\]](#) User Manual

ProArt B760 CREATOR D4 ASUS Si votre bande LED ne s allume pas vérifiez que la RGB adressable est connectée La carte Thunderbolt™ peut être utilisée lorsqu elle F21433 UM WEB model d1cdnhts asus pub mb LGA1700 |||

...

lang:en score:17 filesize: 2.16 M page_count: 41 document date: 2022-12-05




[\[pdf\]](#) Specifications

ASUS 700 Series Specs 20231003 NEW Full Download Z790 H770 B760 The best motherboards for 14th Gen Raptor Lake S refresh and 13th Intel 12th Alder CPUs 20231004 asus microsite motherboard v1 |||

BraSnedr/ieSseries Model ASUS 700 Series Motherboards ROG MAXIMUS Z790 EXTREME ROG MAXIMUS Z790 FORMULA ROG MAXIMUS Z790 DARK HERO ROG MAXIMUS Z790 HERO EVA-02 Edition ROG MAXIMUS Z790 HERO ROG MAXIMUS Z790 APEX ENCORE ROG MAXIMUS Z790 APEX ROG STRIX Z790-E GAMING WIFI II ROG STRIX Z790-E ...

lang:en score:13 filesize: 824.66 K page_count: 1 document date: 2023-10-05

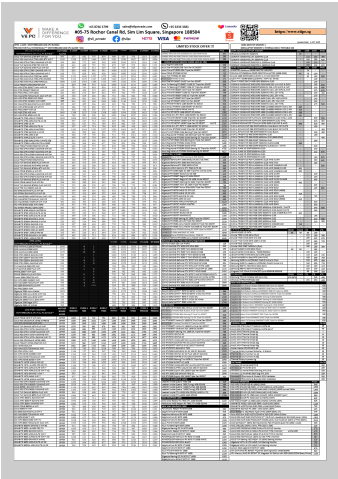

[Vii PC Comprehensive Price List - Gaming PCs, Components & Peripherals](#)

Vii PC offers a detailed price list for a wide range of computer components and peripherals, including Intel & AMD CPUs, motherboards, NVIDIA & AMD graphics cards, DDR4/DDR5 RAM, SSDs, HDDs, power supplies, monitors, and accessories. Find the latest hardware prices updated regularly.

lang:sw score:12 filesize: 512.4 K page_count: 2 document date: 2025-10-03