

[Manuals.plus](#) /

› [CHUYI](#) /

› CHUYI Wireless Bluetooth Multi-Device Keyboard Instruction Manual

CHUYI Bluetooth Multi Device Keyboard

CHUYI Wireless Bluetooth Multi-Device Keyboard Instruction Manual

Model: Bluetooth Multi Device Keyboard

1. INTRODUCTION

Thank you for choosing the CHUYI Wireless Bluetooth Multi-Device Keyboard. This keyboard is designed for versatility and convenience, allowing seamless connection to multiple devices across various operating systems. Its slim design, integrated stand slot, and quiet keys enhance your typing experience for both work and leisure.

Please read this manual carefully to ensure proper setup and operation of your new keyboard.

2. WHAT'S IN THE BOX

- 1 x CHUYI Wireless Bluetooth Keyboard
- 1 x Type-C Charging Cable
- 1 x User Manual

Give You the Best Choice

You can use it in your home or office, or you can give it to your family or friends as a gift

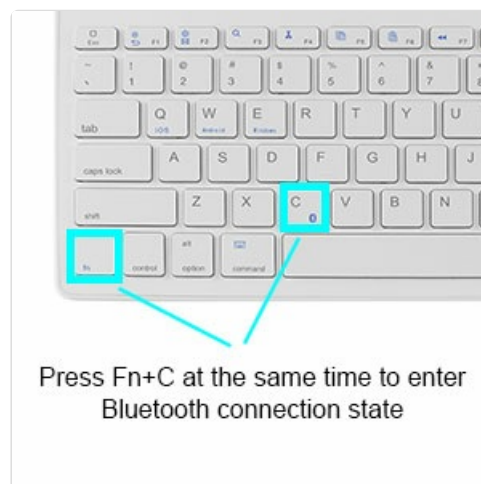


Image: The CHUYI Wireless Bluetooth Keyboard, Type-C charging cable, and user manual as packaged.

3. SETUP

3.1 Charging the Keyboard

Before first use, fully charge the keyboard. Connect the provided Type-C charging cable to the keyboard's charging port and to a USB power source. The battery indicator lights will show charging status. A full charge typically takes about 3 hours and provides approximately 3 months of standby time.



Press Fn+C at the same time to enter Bluetooth connection state

Image: The Type-C charging port on the keyboard with a charging cable inserted.

3.2 Bluetooth Pairing

The keyboard supports dual-channel Bluetooth connectivity, allowing connection to two devices simultaneously.

1. Turn on the keyboard using the ON/OFF switch located on the top right.
2. Select a channel (CH1 or CH2) by sliding the channel switch.
3. Press the **Fn + C** keys simultaneously to enter Bluetooth pairing mode. The Bluetooth indicator light will flash.

4. On your device (phone, tablet, computer), enable Bluetooth and search for available devices.
5. Select "Bluetooth Keyboard" from the list of found devices to connect. The indicator light will stop flashing once connected.
6. Repeat these steps for a second device using the other channel (CH1 or CH2).



Image: The 'Fn' and 'C' keys highlighted, indicating their use for Bluetooth connection.

Video: Demonstration of the Bluetooth connection process for the CHUYI Multi-Device Keyboard.

4. OPERATING INSTRUCTIONS

4.1 Switching Between Connected Devices

To switch between your two paired devices, simply slide the CH1/CH2 switch located near the ON/OFF button. There is no need to re-pair the devices each time.



Image: The CH1/CH2 switch for toggling between two connected Bluetooth devices.

4.2 System Compatibility

The keyboard is compatible with Windows, Android, and iOS operating systems. To optimize key functions for your specific operating system, press the following key combinations:

- **Fn + Q** for iOS devices
- **Fn + W** for Android devices
- **Fn + E** for Windows devices



Image: Icons for Windows, Android, and iOS, illustrating the keyboard's broad compatibility.

4.3 Integrated Stand Slot

The keyboard features a built-in U-shaped stand slot designed to securely hold your smartphone and tablet at an optimal viewing angle for reading or watching videos. The non-slip rubber ensures stability for your devices.



EASY-SWITCH between 2 devices

Unlimited system

Image: The keyboard with a smartphone and tablet positioned in the integrated stand slot.

4.4 Quiet Typing Experience

This keyboard utilizes a scissor-type key structure, providing responsive and quiet keystrokes. This design minimizes typing noise, making it suitable for quiet environments such as offices or libraries.



Image: A close-up diagram showing the internal scissor-switch mechanism of a key.

5. MAINTENANCE

5.1 Battery Management

The keyboard features a rechargeable battery. To prolong battery life, the keyboard enters a smart hibernation mode after 30 minutes of inactivity. Press any key to wake it up. Recharge the keyboard when the battery indicator shows low power.

5.2 Cleaning

To clean your keyboard, gently wipe the surface with a soft, damp cloth. Avoid using harsh chemicals or abrasive materials. Ensure the keyboard is powered off and disconnected from any charging cable before cleaning.

6. TROUBLESHOOTING

- **Keyboard not connecting:** Ensure the keyboard is charged and powered on. Verify Bluetooth is enabled on your device. Re-enter pairing mode (Fn+C) and try connecting again.
- **Keys not responding:** Check battery level. If low, recharge the keyboard. Ensure the keyboard is properly paired and the correct channel (CH1/CH2) is selected.
- **Incorrect characters typed:** Confirm that the correct operating system mode is selected (Fn+Q for iOS, Fn+W for Android, Fn+E for Windows).
- **Keyboard frequently disconnects:** Ensure the keyboard is within the 10-meter (33 feet) operating range of your device. Avoid interference from other wireless devices.

7. SPECIFICATIONS

Feature	Detail
Brand	CHUYI
Model Name	Bluetooth Multi Device Keyboard
Connectivity Technology	Bluetooth 3.0 + 5.0
Operating Range	Up to 10 meters (33 feet)
Number of Keys	78
Key Switch Type	Scissor-Switch

Battery	Rechargeable (Type-C)
Charging Time	Approx. 3 hours
Standby Time	Approx. 3 months
Dimensions (L x W x H)	11.42" x 6.3" x 0.63" (290 x 160 x 16 mm)
Weight	470 g (1.04 lbs)
Material	Acrylonitrile Butadiene Styrene (ABS)
Compatibility	Windows, Android, Mac OS/iOS devices with Bluetooth connectivity

Slim and Lightweight, Easy to Carry

Computer
Bracket
Groove



16cm /
6.3"

29cm / 11.42"



1.6cm
/ 0.63"

Net Weight: 470g / 16.58oz / 1.04lb

Image: Detailed dimensions of the CHUYI Wireless Bluetooth Keyboard.

8. WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the contact details provided with your purchase or visit the official CHUYI website. Keep your purchase receipt as proof of purchase for any warranty claims.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question