

## FANTECH WK895

# FANTECH WK895 Dual Mode Wireless Keyboard and Mouse Combo User Manual

## INTRODUCTION

---

Thank you for choosing the FANTECH WK895 Dual Mode Wireless Keyboard and Mouse Combo. This set provides versatile connectivity options, silent operation, and multimedia functionality for enhanced productivity across various operating systems. Please read this manual carefully to ensure proper setup and optimal performance of your device.

## PACKAGE CONTENTS

---

- FANTECH WK895 Wireless Keyboard
- FANTECH WK895 Wireless Mouse
- USB 2.4GHz Receiver
- User Manual

## SETUP

---

### 1. Battery Installation

The keyboard requires two AAA batteries, and the mouse requires one AA battery (batteries are not included). Follow these steps to install them:

1. Locate the battery compartment on the underside of the keyboard and mouse.
2. Open the battery compartment cover.
3. Insert the batteries, ensuring correct polarity (+ and -).
4. Close the battery compartment cover securely.



## PREMIUM POWER-SAVING TECHNOLOGY

Designed for all-day usage without hassle. Take control of your work and leisure without worrying about battery life.

This image illustrates the battery compartments for both the keyboard and mouse, along with the location of the USB receiver.

## 2. Connecting the Devices

The FANTECH WK895 combo offers dual-mode connectivity: 2.4GHz wireless via USB receiver and Bluetooth.

### 2.1. 2.4GHz Wireless Connection

1. Take out the USB 2.4GHz receiver from the mouse's battery compartment.
2. Plug the USB receiver into an available USB port on your computer.
3. Turn on the keyboard and mouse. They should connect automatically.

### 2.2. Bluetooth Connection

The combo supports pairing with up to three Bluetooth devices (BT1, BT2).

1. Turn on the keyboard and mouse.
2. On the keyboard, press and hold the **FN + BT1** or **FN + BT2** key combination for 3-5 seconds until the indicator light flashes, indicating pairing mode.
3. On your device (PC, laptop, tablet), go to Bluetooth settings and search for new devices.
4. Select "FANTECH WK895 Keyboard" and "FANTECH WK895 Mouse" from the list of available devices to

pair.

5. Repeat for additional Bluetooth devices using the other BT channel.

## **STABLE & RELIABLE TWO-MODE CONNECTIVITY**

Designed with our ultra-stable two-mode technology, which supports wireless connectivity through 2.4Ghz and BT for up to 10 meters, as well as USB connectivity.



This image demonstrates the stable two-mode connectivity of the FANTECH WK895 combo, supporting both 2.4GHz wireless and Bluetooth connections.



This image illustrates the multi-device pairing capability and the dual layout design for Mac and Windows operating systems.

## OPERATING INSTRUCTIONS

### 1. Switching Between Connected Devices

To switch between connected devices, simply press the corresponding key combination on the keyboard:

- For 2.4GHz connection: Press **FN + 2.4G**
- For Bluetooth Device 1: Press **FN + BT1**
- For Bluetooth Device 2: Press **FN + BT2**

### 2. Multimedia Function Keys


The keyboard features multimedia function keys for quick access to various controls. To use them, press the **FN** key simultaneously with the desired function key (F1-F12).

## Multimedia Function Key Combinations

Key Combination	Function
FN + F1	Mute
FN + F2	Volume -
FN + F3	Volume +
FN + F4	Previous Track
FN + F5	Play/Pause
FN + F6	Next Track
FN + F7	Brightness -
FN + F8	Brightness +
FN + F9	Select All
FN + F10	Copy
FN + F11	Paste
FN + F12	Cut

# MULTIMEDIA FUNCTION KEYS

Achieve a variety of shortcut functions to improve your efficiency during work and leisure.

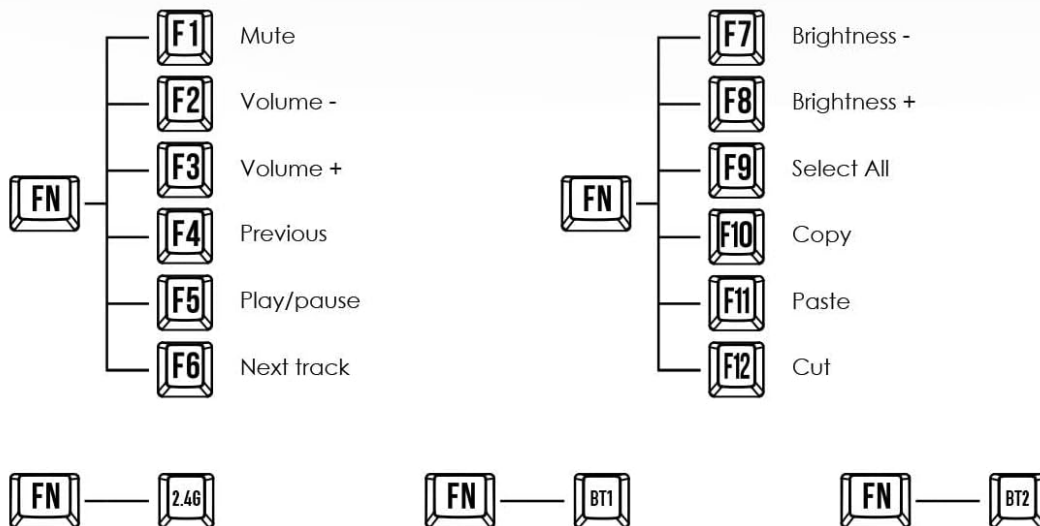

This image provides a visual guide to the multimedia function keys and their uses.

### 3. Mac and Windows Layout Switching

The keyboard supports dual layouts for Mac and Windows operating systems. To switch between layouts, use the dedicated keys or key combinations as indicated on the keyboard (e.g., **Opt/Win** and **Cmd/Alt** keys).

### 4. Silent Click Feature

Both the keyboard and mouse are designed with silent switches, providing a quiet user experience without distracting click sounds.



## PURELY SILENT DESIGN WITHOUT DISTRACTION

Designed with our premium silent switches, providing peace of mind while in use. Purely quiet and comfortable without distractions.

This image highlights the silent design of the keyboard and mouse, ensuring a quiet working environment.

## MAINTENANCE

---

### 1. Cleaning

- Use a soft, dry cloth to wipe the surfaces of the keyboard and mouse.
- For stubborn dirt, slightly dampen the cloth with water or a mild cleaning solution. Avoid excessive moisture.
- Do not use harsh chemicals, abrasive cleaners, or solvents.

### 2. Battery Replacement

When the keyboard or mouse performance degrades (e.g., delayed response, intermittent connection), it may be time to replace the batteries. Refer to the "Battery Installation" section under Setup for instructions.

The devices feature excellent power-saving technology for extended battery life.

## TROUBLESHOOTING

---

## 1. Device Not Connecting

- **Check Batteries:** Ensure batteries are correctly installed and have sufficient charge. Replace if necessary.
- **Power On:** Make sure both the keyboard and mouse are switched on.
- **USB Receiver (2.4GHz):** Ensure the USB receiver is securely plugged into a working USB port. Try a different USB port.
- **Bluetooth Pairing:** For Bluetooth, ensure the device is in pairing mode (indicator light flashing) and your computer's Bluetooth is enabled and searching. Re-pair if needed.
- **Distance:** Ensure the devices are within the effective operating range (up to 10 meters).

## 2. Lag or Intermittent Connection

- **Interference:** Move the devices away from other wireless devices (e.g., Wi-Fi routers, cordless phones) that might cause interference.
- **Battery Level:** Low battery can affect performance. Replace batteries.
- **Obstructions:** Ensure there are no large metal objects between the devices and the receiver/computer.

## 3. Keys or Mouse Buttons Not Responding

- **Re-establish Connection:** Turn off and then on the keyboard/mouse, or re-pair them.
- **Clean:** Check for any debris under the keys or buttons and clean as per maintenance instructions.
- **Test on Another Device:** If possible, test the combo on another computer to determine if the issue is with the devices or your computer.

## SPECIFICATIONS

### Keyboard Specifications

Feature	Detail
Number of Keys	110
Battery Type	2 x AAA (not included)
Dimensions (LxWxH)	430 x 125 x 30 mm
Weight	403 grams

### Mouse Specifications

Feature	Detail
Number of Buttons	5
Battery Type	1 x AA (not included)
Dimensions (LxWxH)	110 x 70 x 30 mm
Weight	55.5 grams
Movement Detection	Optical
Hand Orientation	Right

## General Specifications

Feature	Detail
Connectivity Technology	2.4GHz Wireless (via USB Dongle), Bluetooth
Compatible Devices	PC, Laptop (Mac, Windows)
Color	Black

## TECHNICAL SPECIFICATION

### KEYBOARD

Number of Keys	110 Key
Battery	2AAA Batteries (Not included)
Size	430x125x30mm
Weight	403g

### MOUSE

Number of Buttons	5 Buttons
Battery	1 AA Battery (Not included)
Size	110x70x30mm
Weight	56g

## SIZE



This image provides a visual summary of the technical specifications and physical dimensions for both the keyboard and mouse.

## WARRANTY AND SUPPORT

This FANTECH WK895 product comes with a 30-day warranty from the date of purchase. This warranty covers manufacturing defects under normal use. It does not cover damage caused by misuse, accidents, unauthorized modifications, or normal wear and tear.

For technical support or warranty claims, please contact your retailer or the FANTECH customer service department

through their official website or contact channels.