

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Arteck](#) /

› [Arteck Bluetooth Keyboard and Mouse Set User Manual](#)

Arteck HB192MB167

Arteck Bluetooth Keyboard and Mouse Set User Manual

Model: HB192MB167 | Brand: Arteck

1. INTRODUCTION

Thank you for choosing the Arteck Bluetooth Keyboard and Mouse Set. This manual provides detailed instructions for setting up, operating, and maintaining your new wireless input devices. This set is designed for multi-device connectivity, allowing seamless switching between up to three Bluetooth-enabled devices.



Figure 1.1: Arteck Bluetooth Keyboard and Mouse Set

This image displays the full Arteck Bluetooth keyboard and the ergonomic mouse, showcasing their sleek design and compact form factor.

2. PACKAGE CONTENTS

- Arteck HB192 Multi-pairing Bluetooth Keyboard
- Arteck MB167 Multi-pairing Bluetooth Mouse
- USB Type-C Charging Cable
- User Manual (this document)

3. SETUP AND PAIRING

The Arteck keyboard and mouse can connect to up to three different Bluetooth devices simultaneously. Follow these steps to pair your devices:

1. **Power On:** Ensure both the keyboard and mouse are fully charged and powered on. The power switch for the keyboard is located on the top right edge, and for the mouse, it is on the bottom.
2. **Select a Channel:** On the keyboard, press the Bluetooth channel key (BT1, BT2, or BT3) for approximately 3-5 seconds until the corresponding indicator light flashes rapidly. On the mouse, press the channel switch button on the bottom until the desired channel light (1, 2, or 3) flashes.
3. **Enable Bluetooth on Your Device:** Go to the Bluetooth settings on your computer, tablet, or smartphone.
4. **Search for Devices:** Your device will scan for available Bluetooth devices. Look for "Arteck Keyboard" and "Arteck Mouse" in the list.
5. **Pair:** Select each device to pair. Follow any on-screen prompts, such as entering a pairing code if requested. Once paired, the indicator light on the keyboard/mouse will stop flashing and remain solid for a few seconds, then turn off.
6. **Repeat for Other Devices:** To connect to a second or third device, repeat steps 2-5, selecting a different Bluetooth channel (BT2/BT3 for keyboard, 2/3 for mouse) each time.

3台のデバイスを同時接続できる

初めて長押しして接続

押すだけで簡単に入力が切り替えられる

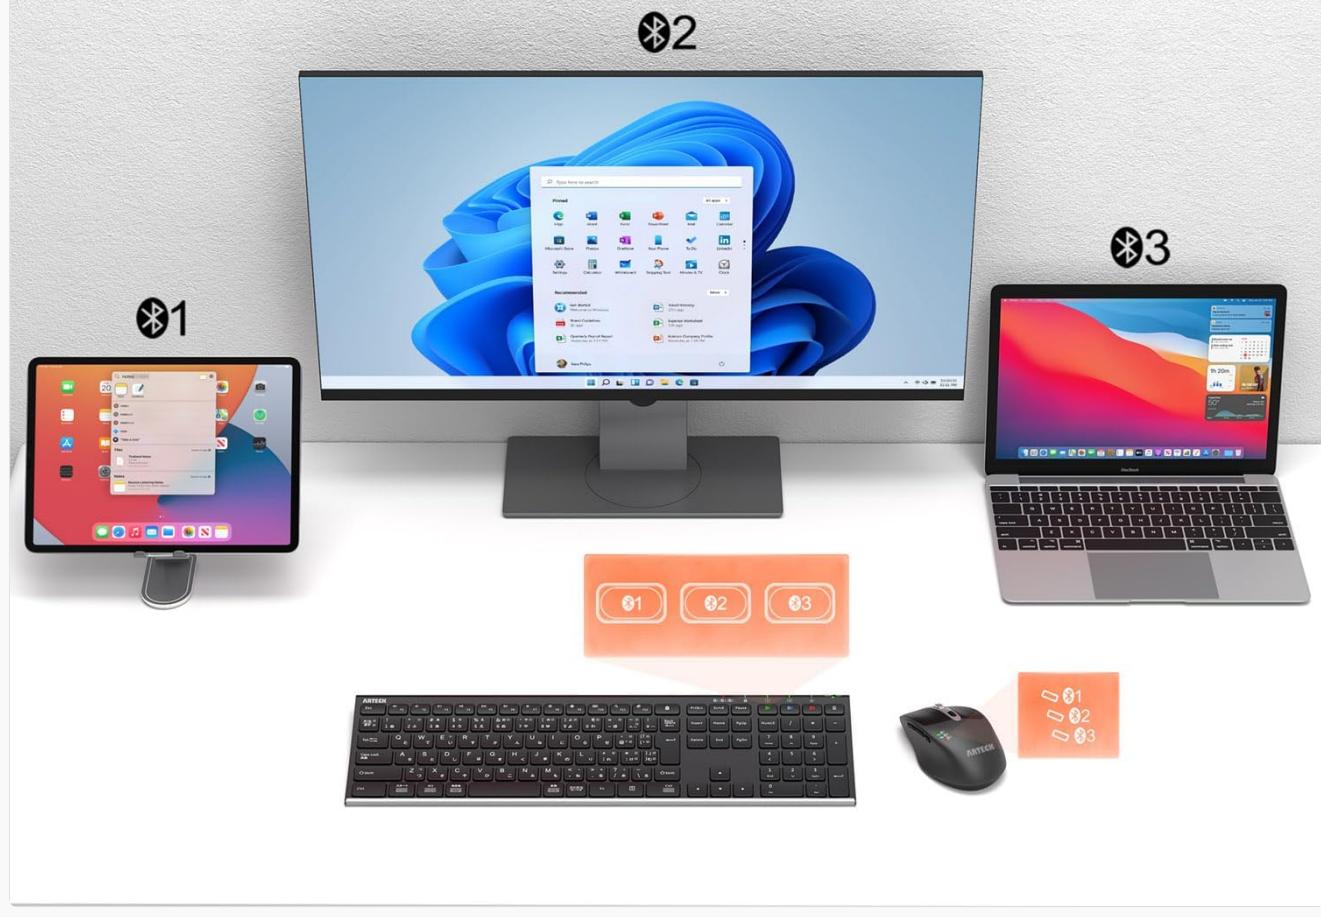


Figure 3.1: Multi-Device Connection Setup

This image illustrates how the Arateck keyboard and mouse can be simultaneously connected to three different devices, such as an iPad, a desktop computer, and a laptop, with dedicated buttons for switching between them.

4. OPERATING INSTRUCTIONS

4.1. Switching Between Devices

Once paired with multiple devices, you can easily switch between them:

- **Keyboard:** Simply press the BT1, BT2, or BT3 key once to switch to the corresponding paired device. The indicator light will briefly illuminate to confirm the switch.
- **Mouse:** Press the channel switch button on the bottom of the mouse to cycle through the paired devices (1, 2, 3). The corresponding indicator light will briefly illuminate.



Figure 4.1: Keyboard Multi-Device Switching

This image highlights the dedicated BT1, BT2, and BT3 keys on the keyboard, used for quick switching between three paired Bluetooth devices.



Figure 4.2: Mouse Multi-Device Switching

This image shows the channel switch button on the bottom of the mouse, allowing users to easily toggle between three connected devices.

4.2. Keyboard Functions

The keyboard features a full-size layout with dedicated function keys and media controls. It supports various

operating systems, including Windows, iOS, iPad OS, Android, and Mac OS, with specific function keys adapting to each OS.

- **Function Keys (F1-F12):** These keys perform various system-specific functions, such as media control (play/pause, volume), brightness adjustment, and more.
- **Scissor-Switch Keys:** Provides a quiet and comfortable typing experience with a low-profile design.

4.3. Mouse Functions

The ergonomic mouse is designed for comfortable operation and enhanced productivity.

- **DPI Adjustment:** The mouse features a DPI switch button, allowing you to adjust the cursor sensitivity to 800, 1200, 1600, 2000, or 2400 DPI. Press the DPI button (located near the scroll wheel) to cycle through the settings.
- **Side Buttons:** Dedicated side buttons enable quick 'back' and 'forward' navigation in web browsers and other applications, improving work efficiency.
- **Quiet Click:** The mouse buttons are designed for quiet operation, minimizing disturbance.

効率アップボタン搭載、DPI変更ボタン、静音クリック



サイドボタン
進む/戻るボタン搭載

マウスを操作で作業効率アップ



5段調節DPI
カウント切り替え

800/1200/1600/2000/2400 DPI



静かなクリック
静音クリックボタンは周

りに迷惑をかけずに操作が可能

Figure 4.3: Mouse Features

This image highlights the key features of the Arteck mouse, including its side buttons for navigation, the 5-level DPI adjustment button, and its quiet click design.

5. BATTERY AND CHARGING

Both the keyboard and mouse are equipped with built-in rechargeable lithium-ion batteries. Use the provided USB Type-C cable for charging.

- **Charging:** Connect the USB Type-C cable to the charging port on the keyboard (top right edge) or mouse (front edge) and plug the other end into a USB power source (e.g., computer USB port, USB wall adapter).
- **Charging Indicator:** The indicator light will show charging status. It typically turns red while charging and green or off when fully charged.
- **Battery Life:** A full charge can provide approximately 6 months of use for the keyboard and 4 months for the mouse, based on 2 hours of continuous daily use.
- **Low Battery Warning:** The indicator light will flash slowly when the battery is low, signaling that charging is required.

充電式長寿命バッテリー

キーボードは6ヶ月使えるバッテリーを搭載します。「1日2時間の使用の場合」

マウスは4ヶ月使えるバッテリーを搭載します。「1日2時間の使用の場合」



Figure 5.1: Charging the Keyboard and Mouse

This image shows the USB-C charging ports on both the keyboard and mouse, illustrating how to connect them for recharging.

6. MAINTENANCE

To ensure the longevity and optimal performance of your Arteck keyboard and mouse, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry, lint-free cloth to clean the surfaces of the keyboard and mouse. For stubborn dirt, slightly dampen the cloth with water or a mild cleaning solution. Avoid excessive moisture.
- **Avoid Liquids:** Do not expose the devices to liquids. In case of accidental spills, immediately power off the device and allow it to dry completely before use.
- **Storage:** Store the devices in a cool, dry place away from direct sunlight and extreme temperatures.
- **Handling:** Avoid dropping or subjecting the devices to strong impacts. Do not attempt to disassemble or modify the devices, as this will void the warranty.



Figure 6.1: Keyboard Underside

This image shows the brushed stainless steel back of the keyboard and the anti-slip silicone pads, indicating durable construction and stable placement.

7. TROUBLESHOOTING

If you encounter issues with your Arteck keyboard or mouse, refer to the following common solutions:

| Problem | Possible Solution |
|---------|-------------------|
|---------|-------------------|

| Problem | Possible Solution |
|--------------------------------------|---|
| Device not connecting/pairing | <ul style="list-style-type: none"> • Ensure the device is powered on and fully charged. • Make sure Bluetooth is enabled on your host device. • Ensure the keyboard/mouse is in pairing mode (indicator light flashing rapidly). • Forget the device in your host device's Bluetooth settings and try pairing again. • Restart your host device. |
| Lag or intermittent connection | <ul style="list-style-type: none"> • Move the keyboard/mouse closer to your host device. • Ensure there are no strong interference sources (e.g., Wi-Fi routers, other wireless devices) nearby. • Charge the device, as low battery can affect performance. |
| Keys not responding/mouse not moving | <ul style="list-style-type: none"> • Check battery level and charge if necessary. • Ensure the correct Bluetooth channel is selected on the keyboard/mouse. • Try re-pairing the device. • Clean any debris from around the keys or mouse sensor. |

8. SPECIFICATIONS

- **Model:** HB192 (Keyboard), MB167 (Mouse)
- **Connectivity:** Bluetooth
- **Keyboard Layout:** Full-size
- **Keyboard Key Structure:** Scissor-switch
- **Mouse DPI Settings:** 800/1200/1600/2000/2400 DPI
- **Battery Type:** Rechargeable Lithium-ion
- **Charging Port:** USB Type-C
- **Compatible OS:** Windows, iOS, iPad OS, Android, Mac OS
- **Dimensions (Keyboard):** Approximately 42.5 x 11.6 x 0.43 cm (16.7 x 4.5 x 0.16 in)
- **Weight (Keyboard):** Approximately 514.6 g (18.2 oz)
- **Dimensions (Mouse):** Approximately 10.7 x 6.9 x 4.1 cm (4.2 x 2.7 x 1.6 in)
- **Weight (Mouse):** Approximately 89 g (3.1 oz)



Figure 8.1: Product Dimensions

This image provides detailed measurements for both the Arteck keyboard and mouse, including their length, width, height, and weight.

9. WARRANTY AND SUPPORT

Arteck provides a 2-year warranty for this product. If you encounter any issues or require assistance, please contact Arteck customer service through the retailer where you purchased the product or visit the official Arteck website for support information.

Please retain your proof of purchase for warranty claims.

© 2025 Arteck. All rights reserved.

Related Documents - HB192MB167

| | |
|--|--|
|  | <p>Arteck HB220b Keyboard Shortcuts and Pairing Guide</p> <p>Comprehensive guide to Arteck HB220b keyboard shortcuts, Bluetooth pairing, and function key usage for iOS, Android, and Windows.</p> |
|  | <p>Guide des raccourcis clavier et d'appariement Arteck HB220b</p> <p>Guide concis des raccourcis clavier, instructions d'appariement et mappages des touches de fonction pour le clavier Arteck HB220b sur iOS, Android et Windows.</p> |

| | |
|---|--|
|  | <p>Arteck HW305-3MW167 Wireless Keyboard and Mouse Combo User Manual</p> <p>Comprehensive user manual for the Arteck HW305-3MW167 wireless keyboard and mouse combo. Includes setup instructions, product specifications, feature details, charging guide, troubleshooting tips, safety precautions, and warranty information.</p> |
|  | <p>Arteck MW167 Wireless Mouse User Manual - Setup and Guide</p> <p>Comprehensive user manual for the Arteck MW167 Wireless Mouse. Learn about product specifications, getting started, pairing, charging, DPI settings, troubleshooting, and warranty information.</p> |
|  | <p>Arteck HB086 Bluetooth Keyboard User Manual</p> <p>User manual for the Arteck HB086 Bluetooth Keyboard, covering product overview, function keys, pairing instructions, charging, troubleshooting, and warranty information.</p> |
|  | <p>Arteck HW192 Wireless Keyboard User Manual</p> <p>User manual for the Arteck HW192 Wireless Keyboard, detailing product specifications, setup, function keys, battery management, troubleshooting, and warranty information.</p> |