



# Beijer ELECTRONICS SER0011 X2 Panel Application Connects to a FTP Server User Guide

[Home](#) » [Beijer ELECTRONICS](#) » Beijer ELECTRONICS SER0011 X2 Panel Application Connects to a FTP Server User Guide 

## Contents

- [1 Beijer ELECTRONICS SER0011 X2 Panel Application Connects to a FTP Server](#)
- [2 Function and area of use](#)
- [3 About this document](#)
- [4 Adjusting the project](#)
- [5 Add additional controls](#)
- [6 Add Control](#)
- [7 Migration](#)
- [8 Tags](#)
- [9 Example screen](#)
- [10 About Beijer Electronics](#)
- [11 Documents / Resources](#)
  - [11.1 References](#)
- [12 Related Posts](#)



**Beijer ELECTRONICS SER0011 X2 Panel Application Connects to a FTP Server**



## FTP Client over OpenNETCF FTP Library

## SER0011 – X2 panel application connects to a FTP server



### Function and area of use

- This document provides guidelines when working with Sample\_FTPClient.
- This document explains how to use the third-party library OpenNETCF.Net.Ftp.dll to connect to a FTP server. It implements connect, disconnect, create a directory, delete a directory, change the working directory, upload a file, download a file, rename a file on the server, get file list, etc. You can get the Connected, Disconnected, CommandSent, and ResponseReceived events to handle your business logic

## About this document

This quick start document should not be considered as a complete manual. It is an aid to be able to startup a normal application quickly and easily

## **Copyright © Beijer Electronics, 2021**

This documentation (below referred to as 'the material') is the property of Beijer Electronics. The holder or user has a non-exclusive right to use the material. The holder is not allowed to distribute the material to anyone outside his/her organization except in cases where the material is part of a system that is supplied by the holder to his/her customer. The material may only be used with products or software supplied by Beijer Electronics. Beijer Electronics assumes no responsibility for any defects in the material, or for any consequences that might arise from the use of the material. It is the responsibility of the holder to ensure that any systems, for whatever applications, which is based on or includes the material (whether in its entirety or in parts), meets the expected properties or functional requirements. Beijer Electronics has no obligation to supply the holder with updated versions.

Use the following hardware, software, drivers and utilities in order to obtain a stable application:

### **In this document we have used following software and hardware**

- iX Developer 2.4 SP5/SP6
- All X2 panels and PC Runtime

### **For further information refer to**

- Beijer Electronics knowledge database, HelpOnline

This document and other quick start documents can be obtained from our homepage.  
Please use the address [support.europe@beijerelectronics.com](mailto:support.europe@beijerelectronics.com) for feedback

### **Source code**

- The source code of the DLL used is distributed together with the sample project.
- The OpenNETCF.Net.Ftp.dll Library is an open source project compiled for NET Compact Framework 3.5.
- As we extended the BeginConnect Method of the DLL it is mandatory to use this version of the DLL – at least if you want to use the additional "Command Delay" property (for adjusting e.g. low-speed connections or connections between slower devices).

## **Adjusting the project**

### **Command Delay**

This is an additional parameter specified utilizing the 3rd overload of the BeginConnect method. Below one can see the BeginConnect method of the script module "FTPAdapter". For X2 devices running either WinCE6 or WinCE8 (WEC2013) the project is pre-configured to run with a Command Delay of 250ms, for non-CE devices no 3rd parameter is specified the default 100ms delay is used.

```

/// <summary>
/// Connect to the FTP server using the supplied username and password
/// </summary>
public void BeginConnect()
{
    try
    {
        // check OS and configure the command delay depending to your setup (server/client) to get a reliable system
        if(System.Environment.OSVersion.Platform == PlatformID.WinCE)
        {
            FTPInstance.BeginConnect(Globals.Tags.UserName.Value, Globals.Tags.Password.Value, 250); //command delay 250ms
        }
        else
        {
            FTPInstance.BeginConnect(Globals.Tags.UserName.Value, Globals.Tags.Password.Value); //default delay = 100ms
        }
    }
}

```

## FTP server specific adjustments

In multiple methods you have the possibility to adjust the script code to react properly to what the FTP server responses. One example is the “\_ftp\_ResponseReceived” method where one can adjust e.g. what the server responses after a directory change.

## Active FTP vs. Passive FTP

- The FTP protocol has 2 modes, PORT (also called “regular” or “normal” mode) and PASV (“passive” mode). The FTP client determines the mode that will be used. If the client issues a PORT command, it is attempting “PORT” mode. If the client issues a PASV command, it is attempting “PASV” mode.
- PASV mode forces the client-server data connection to be established by the client, rather than the server (which is the default). PASV mode is required for users who are behind a router-based firewall.

### Details:

In PORT and PASV mode the FTP session uses two port numbers.

The first port number is allocated on the server (default: port 21). This is referred to as the “Control or Command Channel”.

If the client sends a PORT command, which contains the client IP address and (the second) allocated port number.

Then the FTP server connects to this port to send the data (referred to as the “Data Channel”).

**Client:** PORT 127,0,0,1,12,82

**Server:** 200 Port command successful.

If the client sends a PASV command, then the FTP server responds back to the client with a port number that it has allocated.

In this case the “Data Channel” connection is created by the client to the IP Address and port number provided by the FTP server.

**Client:** PASV

**Server:** 227 Entering Passive Mode (127,0,0,1,12,251)

Also checkout the below website for more information about PASV and PORT mode.

<http://slacksite.com/other/ftp.html>

## Add additional controls

Before you could open this sample successfully, you need to add WinForms controls that are used by the



“FTPClientDemoScreen” demonstration. The controls should be added as follows:

- ListView (System.Windows.Forms)
- TextBox (System.Windows.Forms)

## Add Control

The following description shows how to add additional controls.


“Home” → “View All Objects” of “Object” → “Add Control” of “Additional Controls” → check controls as desired → “OK”

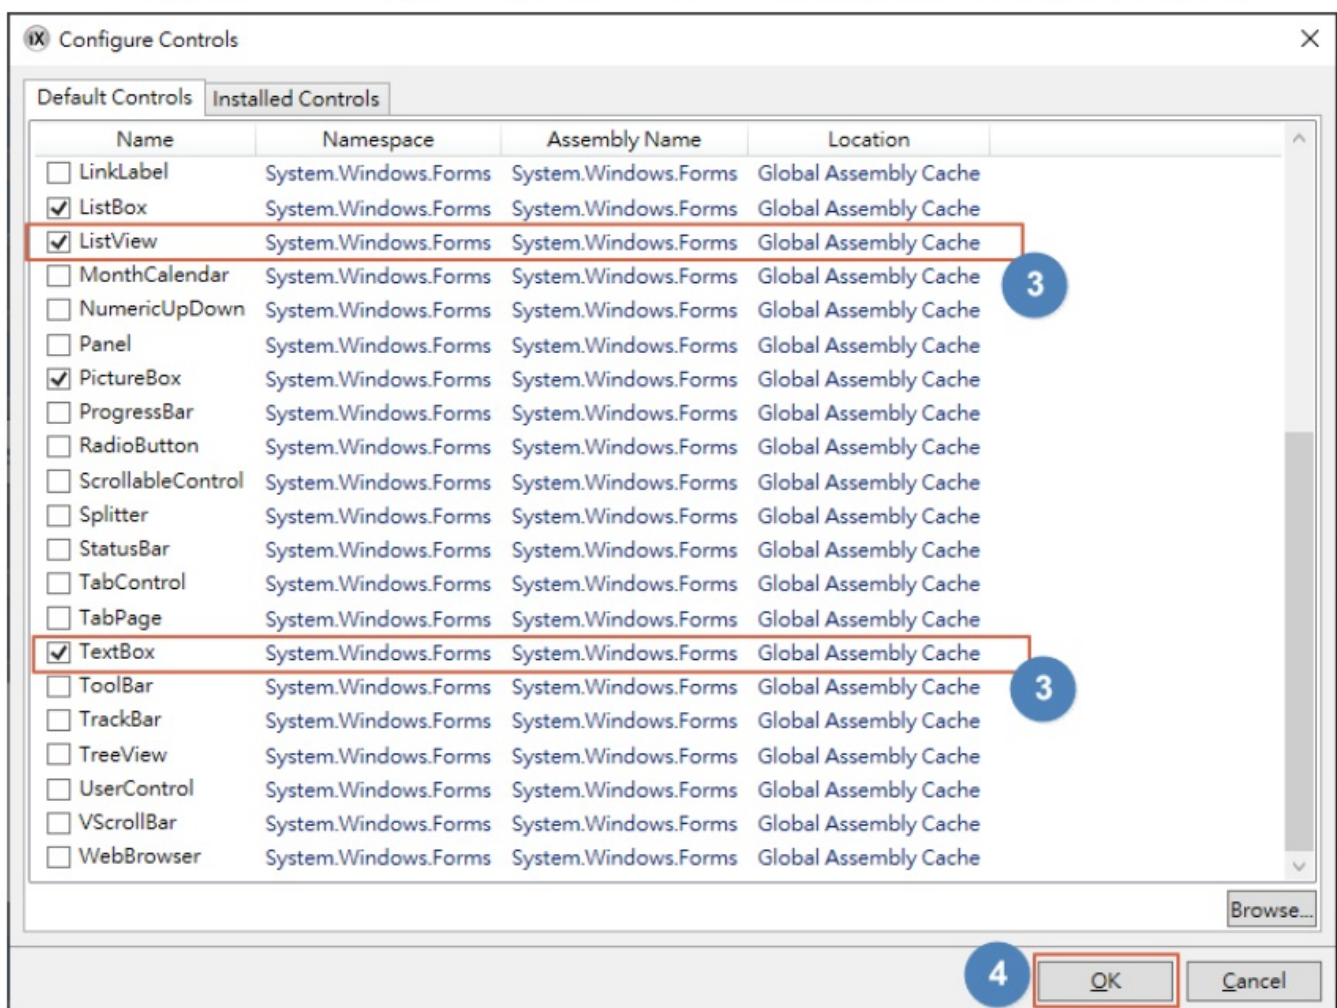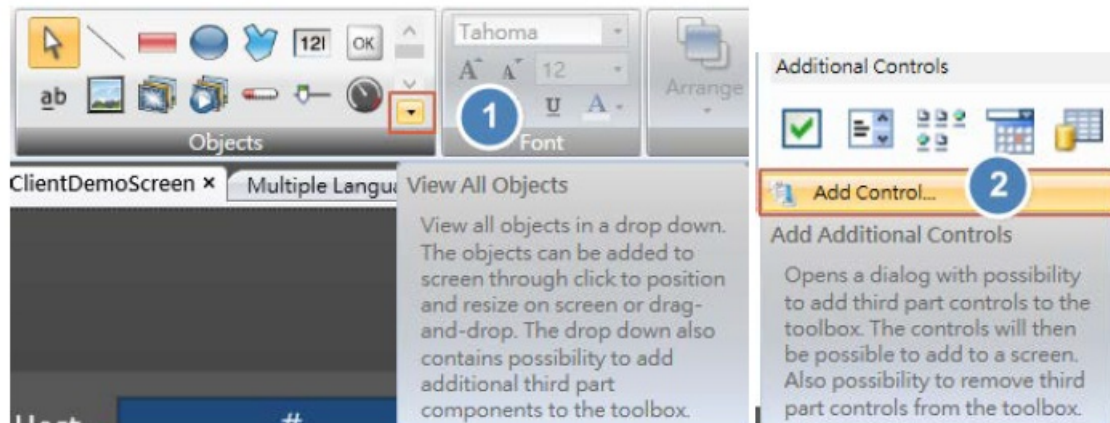

## Migration

### Add reference


“Project” → “Referenced Assemblies” → “Add” → browse to and select the assembly “OpenNETCF.Net.Ftp.dll” → “OK” Open your iX project and click the “Referenced Assemblies” on the “Project” tab to add the reference.

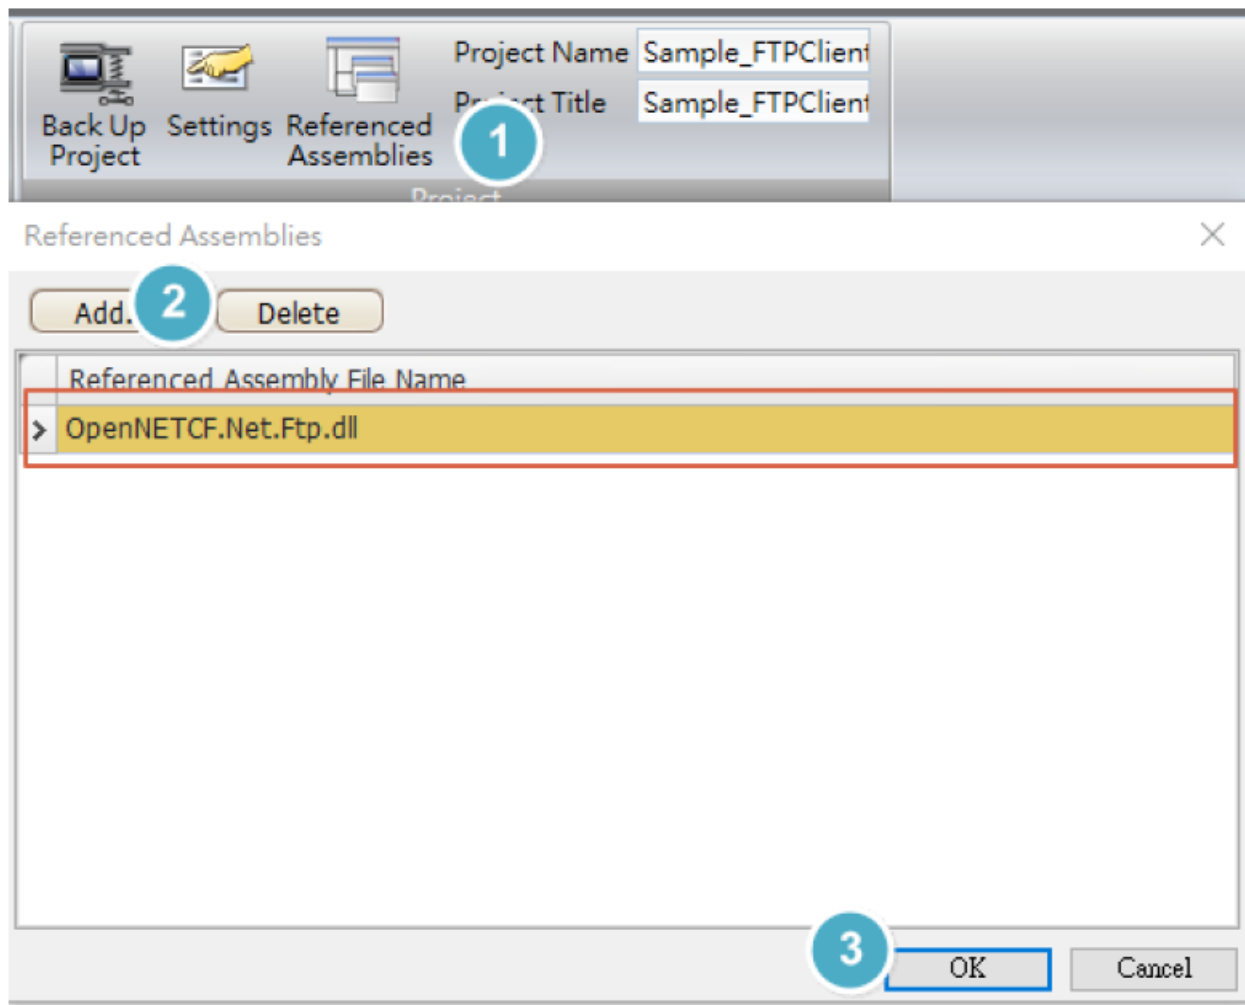

## Add a ScriptModule

“Insert” → “Script Module” → “Rename” → input new name “FTPAdapter” → copy all codes from the “FTPAdapter” of this sample & paste these codes on “FTPAdapter” of your project → Hookup “FTPAdapter\_Created” event handler with “Created” event of the “FTPAdapter”script module You can utilize it to interact with an FTP Server like the “FTPClientDemoScreen” demonstration

Insert a script module by clicking the “Script Module” on the “Insert” tab. Rename the Script Module as desired.

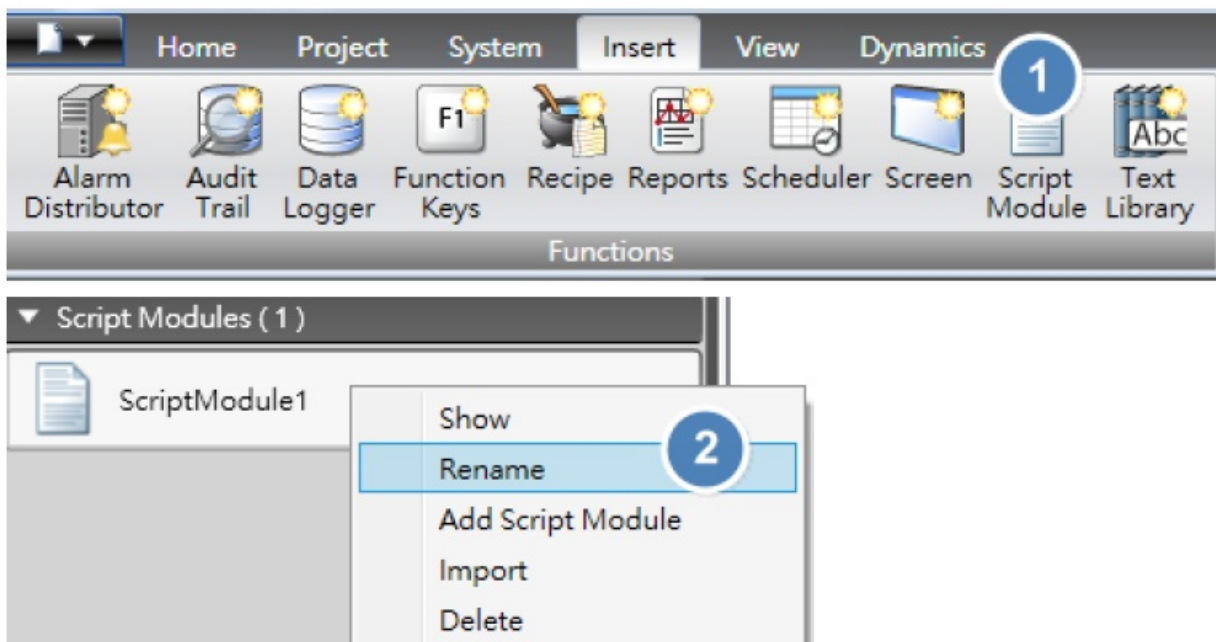




**iX Rename**

Please enter a new name:

Old name: ScriptModule1

New name: FTPAdapter **3**

OK Cancel

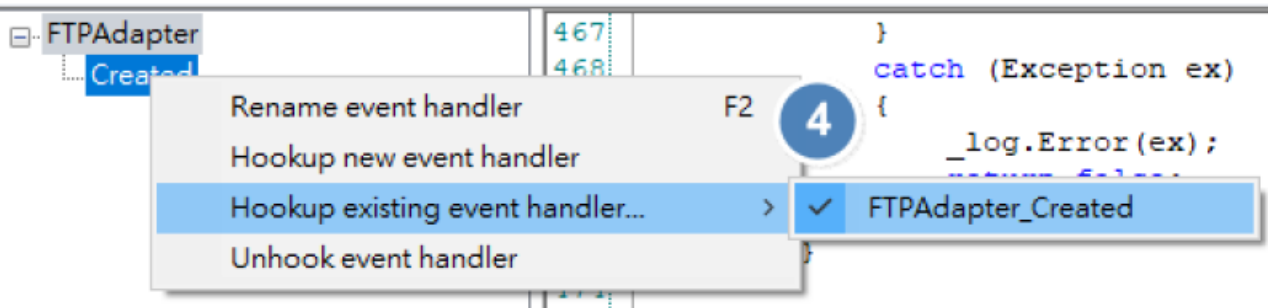

A Script Module is a class in C# .NET. It would be used to create a singleton object while initialization processes of an iX application. All the objects created by you via iX Developer, i.e. not created by scripting, would be the properties of the Globals object. So you can use the “Globals” object name to get all these objects. For example, after inserting a Script Module with the name, ExampleScriptModule, and write a public method, ExampleMethod, you can use “Globals.ExampleScriptModule.ExampleMethod()” in scripting to call the method of it.

## Tags

### Mandatory Tag of FTPAdapter

Tag Name	Global Data Type	Description
<b>FTPServerUri</b>	STRING	Remote FTP server URI
<b>FTPServerPort</b>	INT32	Remote FTP server port number
<b>FTPIsConnected</b>	BOOL	Indicate the connection status
<b>UserName</b>	STRING	The account/user name is used to log in FTP server
<b>Password</b>	STRING	The password is used to log in FTP server
<b>FTPServerType</b>	STRING	Get the FTP server type (It would be updated after the connection established.)
<b>FTPRemoteDirectory</b>	STRING	Current working directory on FTP server (It would be available after the connection established.)

Other tags are not necessary, they just are used to build the demonstrations. You can refer to the demos to find

out how they work.

## APIs

FTPAdapter class : Script Module

- **Properties:**

Name	Data Type	Description
<b>IsConnected</b>	bool	Get the connection status
<b>RemoteDirectory</b>	string	The remote directory
<b>TransferType</b>	FTPTransferType	The transfer type: Binary or ASCII
<b>BufferSize</b>	int	Sets the size of the internal buffer used for FTP transfers. Default is 512 bytes
<b>ConnectionTimeout</b>	int	Timeout for FTP operations
<b>ExceptionOnError</b>	bool	When set, if an error is encountered while using the class instance, an exception will be thrown
<b>ServerType</b>	FTPServerType	The remote server type: Unix-compliant server, Windows/IIS-compliant server or Unknown server type

- **Events:**


Name	Description
<b>Connected</b>	Triggered after the connection established
<b>Disconnected</b>	Triggered after the connection closed
<b>CommandSent</b>	Triggered after a command sent
<b>ResponseReceived</b>	Triggered after a response received

- **Methods:**



Name	Return Data Type	Description
<b>BeginConnect()</b>	void	Connect to the FTP server using the supplied username and password
<b>Disconnect()</b>	void	Disconnect from the FTP server
<b>ChangeDirectory( string directory)</b>	void	Change the remote working directory
<b>CreateDirectory( string directory)</b>	void	Create a directory on the FTP server
<b>DeleteDirectory( string directory)</b>	void	Delete an empty directory from the FTP server
<b>DeleteFile(string fileName)</b>	void	Delete a file on the FTP server
<b>EnumFiles()</b>	FTPFiles	Get a list of the files in the current remote directory
<b>GetFile( string remoteFileName, string localFileName, bool overwrite)</b>	void	Retrieves a file from the FTP server
<b>GetFileList(bool detailed)</b>	string	Retrieves the filelist string as the FTP server sends it
<b>RenameFile( string currentFileName, string newFileName)</b>	void	Rename a file on the FTP server
<b>SendCommand( string command)</b>	bool	Send a generic or server-specific command to the FTP server
<b>SendFile(string localFilePath, string remoteFileName)</b>	bool	Send a file to the FTP server

## Example screen

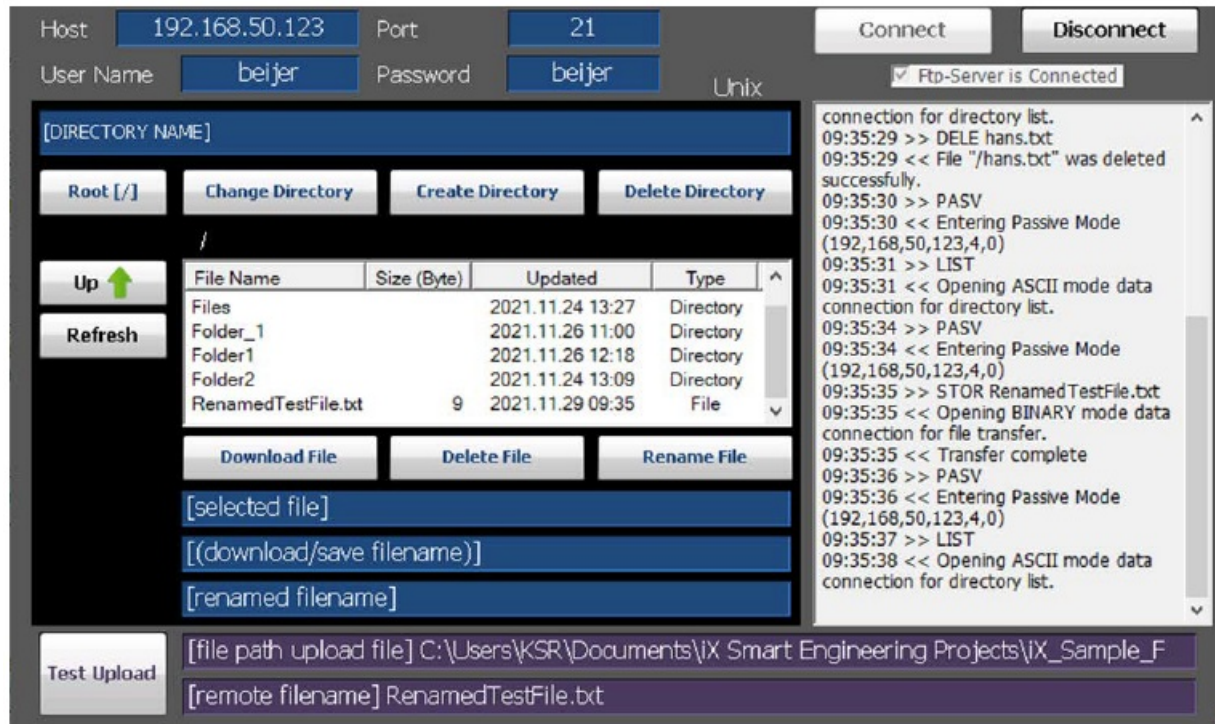

## About Beijer Electronics

Beijer Electronics is a multinational, cross-industry innovator that connects people and technologies to optimize processes for business-critical applications. Our offer includes operator communication, automation solutions, digitalization, display solutions and support. As experts in user-friendly software, hardware and services for the Industrial Internet of Things, we empower you to meet your challenges through leading-edge solutions. Beijer Electronics is a Beijer Group company.

Since its start-up in 1981, BEIJER GROUP has evolved into a multinational group with sales of 1.4 billion SEK 2020. BEIJER GROUP is listed on the NASDAQ Stockholm Main Market under the ticker BELE.

[www.beijergroup.com](http://www.beijergroup.com)



China



Denmark



France



Germany



India



Norway



South Korea



Sweden HQ



Taiwan



Turkey



United Kingdom




USA

## Contact us

Global offices and distributors

## Documents / Resources

	<p><a href="#">Beijer ELECTRONICS SER0011 X2 Panel Application Connects to a FTP Server</a> [pdf] User Guide</p> <p>SER0011 X2 Panel Application Connects to a FTP Server, SER0011, X2 Panel Application Connects to a FTP Server</p>
---	---

## References

-  [\\_\\_\\_\\_\\_](#)
-  [Active FTP vs. Passive FTP, a Definitive Explanation](#)

Manuals+.