

BOGEN[®]
COMMUNICATIONS, INC.
**Bogen E7000 IP
Based Paging
System**



Bogen E7000 IP Based Paging System User Guide

[Home](#) » [BOGEN](#) » Bogen E7000 IP Based Paging System User Guide 

Contents

- [1 Bogen E7000 IP Based Paging System](#)
- [2 Specifications](#)
- [3 Introduction](#)
- [4 Nyquist E7000](#)
- [5 CrisisGo Integration](#)
- [6 How It Works](#)
- [7 Send Alert via CrisisGo App](#)
- [8 Nyquist Routine Execution](#)
- [9 FAQ](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)

BOGEN[®]
COMMUNICATIONS, INC.

Bogen E7000 IP Based Paging System



Specifications

- Product Name: CrisisGo Integration with Nyquist
- Last Updated: September 1, 2024
- API Version: Nyquist E7000 Routines API
- API Type: HTTP(S)
- Required Service: Routines API
- Supported Version: Nyquist E7000

Introduction

The CrisisGo + Nyquist integration enables automated execution of Routines in your Nyquist systems triggered by predefined CrisisGo alerts.

Nyquist E7000

Bogen’s E7000 is a suite of powerful, yet easy-to-use tools that allows educators to quickly and effectively manage campus and district-wide communications. For more information, please visit <https://www.bogen.com/education-e7000>

API Version

This integration has been tested with the Nyquist E7000 Routines API.

API Type	Required Service	Supported Version
HTTP(S)	Routines API	Nyquist E7000

The installation of E7000 and Routines API setup is not covered in this configuration guide, please contact BOGEN customer support if you experience any issues or problems in installing the required service.

API URL Format

Here is the format of the Routines API request URL, you would need to prepare a valid HTTP(S) URL based on the setup in your E7000 system as described below.
`https://<ip_address>/routine/api/<dtmf_code>/0/0/<p1>/<p1>`

Parameter	Description
ip_address	The Nyquist server’s public IP address.
dtmf_code	The DTMF code of the Routine to be executed.
p1	A value that will replace the \$apiParam1 variable in an action field.
p2	A value that will replace the \$apiParam2 variable in an action field.

The parameters <p1> and <p2> are passed through the URL to the routine. That routine can reference these values by using the variables \$apiParam1 and \$apiParam2 within specific fields of the Routine Actions (as well as within Routine Action Condition fields).

Note: Values must be provided for both <p1> and <p2>. If either or both parameters will not be used, specify a value of “0”(zero).

API Parameter Encode

When setting URL parameters (<p1> and <p2>) for apiParam1 and apiParam2, it's important to encode special characters to ensure the URL is valid and correctly interpreted by web servers. Here are some common characters that need to be encoded:

Character	Encoded Value
(space)	%20 or +
!	%21
"	%22
#	%23

\$	%24
%	%25
&	%26
'	%27
(%28
)	%29
*	%2A
+	%2B
,	%2C
/	%2F
:	%3A
;	%3B
=	%3D
?	%3F
@	%40
[%5B
]	%5D
~	%7E

Nyquist API Key

The API Key (Bearer Token) needs to be created in your Nyquist system for CrisisGo integration.

Configure Firewall Rules

Please ensure your firewall and Windows server are well configured to allow traffic from CrisisGo server IP 18.207.62.36 and 18.210.58.55.

CrisisGo Integration

Installation

Based on your subscription, the CrisisGo team has already activated the feature during the onboarding process.

Integration Management

MY INTEGRATIONS

ALL INTEGRATIONS



INSTALLED

CRISISGO API KEY

Integrations

NYQUIST

Results View: 10

NAME	APPLICATION ID	MANAGEMENT
 NYQUIST- IP Based Paging	f2334382-c4ca-ef79-5b6f-301ca311c2d2	

Add Outbound Endpoint

Log in to the CrisisGo Integration Portal, then go to the Configuration > Outbound > API Endpoint.

Configuration - NYQUIST- IP Based Paging

Integration / Configuration

OUTBOUND

RULES

API ENDPOINT

Add your API endpoint to receive notifications from CrisisGo.

+ Add Endpoint

Results View: 10

ENDPOINT NAME	ACTION TYPE	RETRY TIME(S)	ACTION
No matching data found.			

Click Add Endpoint, enter your Routines API URL, select the Auth Type: Bearer Token, and then enter your Bearer API Key. Click Test Connection at the bottom, and the routines should be executed successfully if everything is correct.

Please fill the required endpoint information below and make sure your firewall is well configured to allow traffic from CrisisGo server ip 18.207.62.36 and 18.210.58.55

HTTP(S) URL

GET

https://[REDACTED]7/routine/api/1133/0/1/Test%20Building/302

Auth Type

Bearer Token

Bearer Token

.....



Custom HTTP Header(s) +

KEY	VALUE	ACTION
This API Endpoint currently has no custom HTTP headers.		

Test Connection  Test connection succeeded.

 Note: Test Connection may trigger an actual event in your target system. Please be aware.

Retry

1

 Time(s) If API Endpoint(s) Fails.

SAVE

Add Outbound Rules

After setting up Routines API endpoint(s), you can build outbound rules to define which alert needs to trigger the execution of the routine defined by the endpoint. Here is an example rule for Student Altercation.

Rule Name

Test - Student Altercation

Select CrisisGo Message Group

NYQUIST Test Group

Select Notification Type

Alert

Trigger condition consists of one or multiple filter criteria, which must be met before the action is triggered.

Trigger Condition

☐ All Alerts ☒ Filtered Alerts

This rule will trigger the action for the alert which is sent out in the associated message group and matches the conditions below.

Condition Type

All conditions have been met

Alert Name contains Student Altercation

[+ New Filter](#)

This API endpoint will be called when the filtered alert is sent or released.

Select Destination API Endpoint

Routine - Student Altercation


SAVE

How It Works

Now you have finished the integration setup for Nyquist E7000 via Routines API. CrisisGo alert(s) defined by the outbound rules within associated message group(s) would be automatically posted to your Nyquist system to execute specified Routine actions accordingly as below.

- Displays a warning message on all Nyquist user dashboards.
- Composes and plays an emergency-level TTS-based announcement throughout the (virtual) facility. Displays an emergency level message on all Nyquist message displays throughout the (virtual) facility. Sends an email with the pre-defined alert message which serves as confirmation that the routine was indeed triggered and executed completely.

Send Alert via CrisisGo App

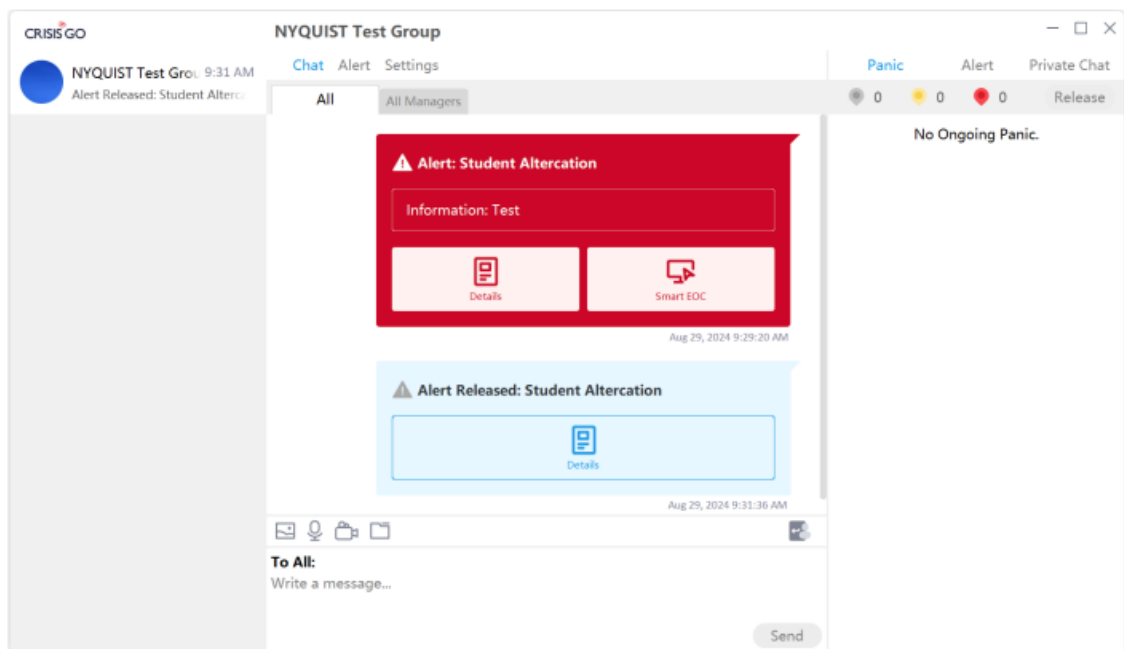

Nyquist Routine Execution

— Forwarded message —
From: <nyquist.c4000@gmail.com>
Date: Thu, Aug 29, 2024 at 9:29 AM
Subject: CRISISGO ALERT: Student Altercation
To:


This is a CrisisGo test. A student altercation has been reported on-premises in building Test Building, near room/door 302. Please dispatch a School Resource Officer accordingly.
Warning announcements and display messages were successfully played throughout the facility.
Bogen Communications LLC

FAQ

Q: What should I do if I experience issues with installing the required service E7000 and Routines API?

A: If you encounter any problems during installation, please contact BOGEN customer support for assistance.

Documents / Resources

	Bogen E7000 IP Based Paging System [pdf] User Guide E7000, E7000 IP Based Paging System, E7000, IP Based Paging System, Paging System, Sys tem
---	--

References

- [User Manual](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.