

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [Attoe](#) /

> [Attoe Wireless Bluetooth Mouse MXY0614 Instruction Manual](#)

Attoe MXY0614

Attoe Wireless Bluetooth Mouse MXY0614 Instruction Manual

Model: MXY0614 | Brand: Attoe

1. INTRODUCTION

This manual provides detailed instructions for the Attoe Wireless Bluetooth Mouse MXY0614. This transparent, dual-mode (Bluetooth + 2.4G) mechanical mouse features a magnetic top cover, rechargeable battery, and RGB backlighting. It is designed for use with various devices including desktops, laptops, and tablets, offering broad compatibility across Windows, Vista, Linux, and Mac OS operating systems.

2. PRODUCT OVERVIEW

Key Features:

- **Magnetic Top Cover:** Ensures secure attachment and easy access to the USB receiver.
- **RGB Backlight:** Features a water-cooled light band with multiple lighting effects.
- **Battery Display:** Four indicator lights show the remaining battery level.
- **Rechargeable:** Built-in 400mAh lithium polymer battery with Type-C charging port.
- **Dual Mode Connection:** Supports both Bluetooth and 2.4G wireless connectivity.
- **Auto-Sleep Function:** Automatically enters deep sleep mode after 10 minutes of inactivity to conserve power.

Package Contents:

- 1 x Attoe Wireless Bluetooth Gaming Mouse
- 1 x Charging Cable (Type-C)
- 1 x Instruction Manual



Image: Package contents of the Attoe Wireless Bluetooth Mouse MXY0614.

3. SETUP

3.1 Charging the Mouse

Before first use, fully charge the mouse using the provided Type-C charging cable. Connect the cable to the mouse's Type-C port and a USB power source. The battery indicator lights will show charging progress and remaining battery level.



Image: Detailed diagram of the mouse components, including the Type-C charging port and battery level display.

3.2 2.4G Wireless Connection

1. Remove the magnetic top cover to access the USB receiver.
2. Take out the USB receiver from its storage slot.
3. Insert the USB receiver into an available USB port on your computer or device.
4. Locate the mode switch on the bottom of the mouse and slide it to the '2.4G' position.
5. The mouse should connect automatically.

Magnetic Top Cover Magnetic Receiver



Image: Demonstrating the magnetic top cover and USB receiver location.

DUAL MODE BT MOUSE

T200 2 Modes: BT5.0+2.4 G wireless mous



Image: The mouse highlighting its dual-mode connectivity options.

3.3 Bluetooth Connection

1. Locate the mode switch on the bottom of the mouse and slide it to the 'BT' position.
2. Press and hold the left and right mouse buttons simultaneously for 3 seconds to enter Bluetooth pairing mode. The RGB lights will flash to indicate pairing mode.
3. On your device (computer, laptop, tablet), go to Bluetooth settings and search for new devices.
4. Select 'ATTOE Mouse' (or similar name) from the list of available devices to pair.
5. Once paired, the RGB lights will stop flashing and remain steady.

3.4 Setup Video Guide

Your browser does not support the video tag.

Video: This video demonstrates the features of the Attoe Transparent Gaming Mouse, including how to access the USB receiver, switch modes, and showcases the RGB lighting effects. It provides a visual guide for initial setup and operation.

4. OPERATING INSTRUCTIONS

4.1 Mode Switching

To switch between 2.4G wireless mode and Bluetooth mode, use the physical switch located on the bottom of the mouse. Slide it to the desired connection type (2.4G or BT).

4.2 RGB Lighting Control

- **Switching Effects:** Click the dedicated light mode switch button (as indicated in the diagram in Section 3.1) to cycle through 11 different RGB lighting effects.
- **Turning On/Off Lights:** Long press the light mode switch button for 3 seconds to turn the RGB lights on or off.



Image: The mouse displaying various RGB lighting effects.

4.3 DPI Adjustment

The mouse features a DPI button (as indicated in the diagram in Section 3.1) to adjust cursor sensitivity. Press this button to cycle through available DPI settings (e.g., 800/1200/1600 DPI) to match your preference and task requirements.

4.4 Auto-Sleep Function

The mouse is equipped with an auto-sleep feature to conserve battery. If the mouse is not operated for more than 10 minutes, it will automatically enter a deep sleep mode. To wake the mouse, simply move it or press any button.

5. MAINTENANCE

5.1 Cleaning

To clean the mouse, use a soft, dry cloth. For stubborn dirt, a slightly damp cloth can be used, ensuring no moisture enters the internal components. Avoid using harsh chemicals or abrasive cleaners.

5.2 Battery Care

To prolong battery life, avoid fully discharging the mouse frequently. Charge the mouse when the battery indicator shows low power. Do not expose the mouse to extreme temperatures.

6. TROUBLESHOOTING

6.1 Mouse Not Connecting

- **Check Mode Switch:** Ensure the mode switch on the bottom of the mouse is set to the correct connection type (2.4G or BT).
- **2.4G Connection:** Verify the USB receiver is securely plugged into your device. Try a different USB port.
- **Bluetooth Connection:** Ensure Bluetooth is enabled on your device. Re-enter pairing mode on the mouse (press and hold left and right buttons for 3 seconds) and re-scan for devices on your computer.
- **Battery Level:** Check if the mouse battery is charged. Low battery can affect connectivity.

6.2 RGB Lights Not Working

- **Check Light Switch:** Press the light mode switch button to ensure the lights are not turned off. Long press for 3 seconds to toggle them.
- **Battery Level:** Ensure the mouse has sufficient charge, as RGB lighting consumes power.

6.3 Cursor Movement is Erratic or Unresponsive

- **Surface:** Use the mouse on a clean, non-reflective surface or a mouse pad.
- **Optical Sensor:** Ensure the optical sensor on the bottom of the mouse is clean and free from obstructions.
- **Battery Level:** Recharge the mouse if the battery is low.

7. SPECIFICATIONS

Feature	Specification
Model Number	MXY0614
Connectivity Technology	Bluetooth, 2.4G USB Wireless
Movement Detection Technology	Optical
Rated Voltage/Current	DC 5V/400mA
DPI Settings	Up to 1600 DPI (Adjustable)
Switch Life	20 million cycles

Wireless Connection Distance	10 meters
Product Dimensions	113 x 58 x 25 mm (4.45 x 2.28 x 0.1 inches)
Item Weight	40g (1.41 ounces)
Battery	Built-in 400mAh Lithium Polymer (1 AAA battery required for initial setup/backup, if applicable)
Compatibility	Windows 2000/XP/win7/win8/win10, Vista 32 bit, IOS, Linux, Mac OS

Product Size: 11.3x5.8x2.5cm

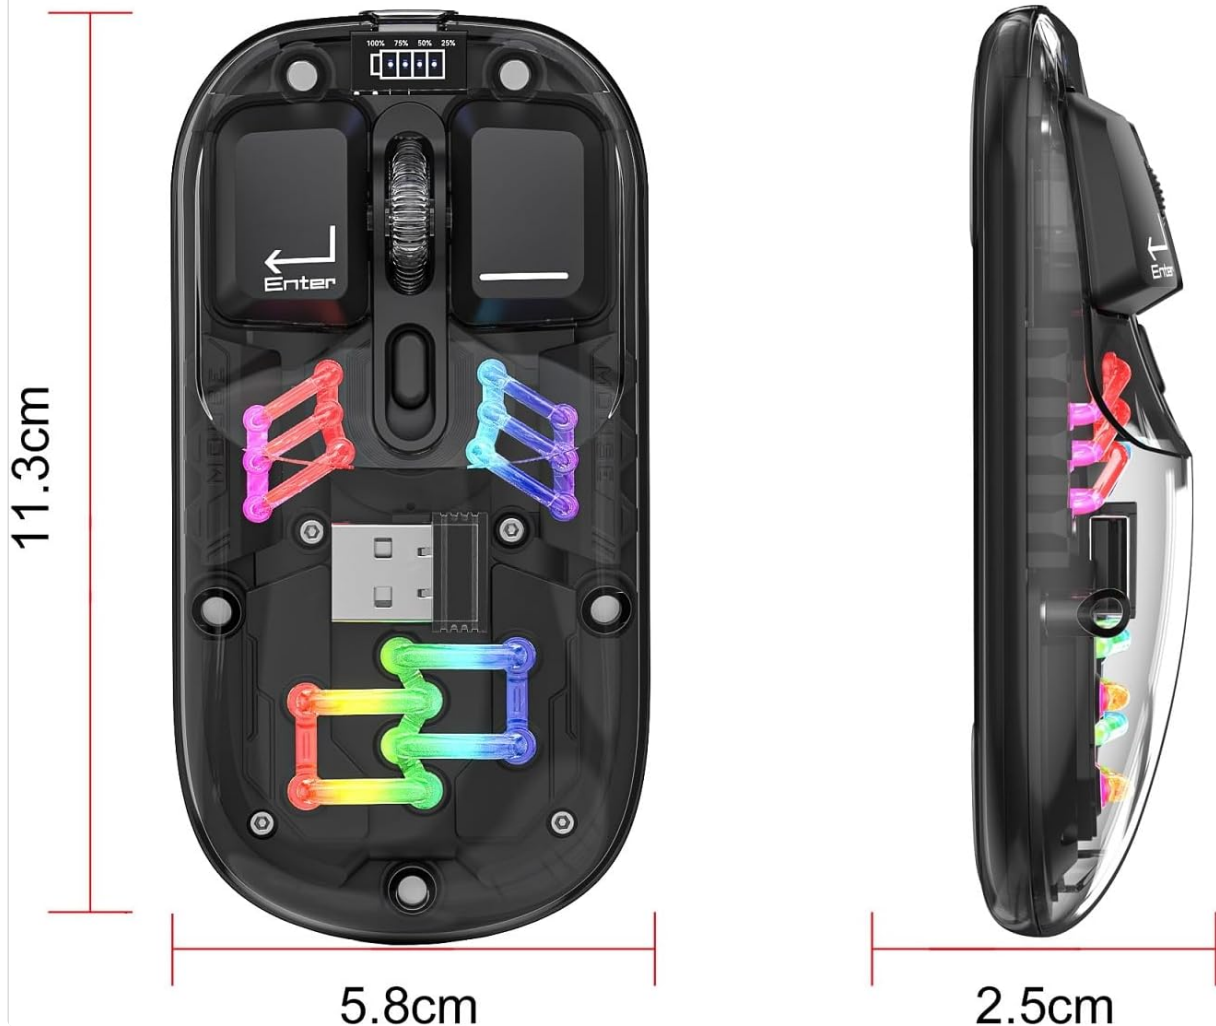


Image: Product dimensions of the Attoe Wireless Bluetooth Mouse MXY0614.

8. WARRANTY AND SUPPORT

For any questions or concerns regarding your Attoe Wireless Bluetooth Mouse MXY0614, please contact the seller or manufacturer directly for after-sales service. They are committed to providing a satisfactory resolution to any issues you may encounter.

Please retain your purchase receipt as proof of purchase for any warranty claims.

