



DS18 PRO-X10.4M 10-Inch Midrange Speaker Owner's Manual

[Home](#) » [DS18](#) » DS18 PRO-X10.4M 10-Inch Midrange Speaker Owner's Manual 





PRO-X10.4M 10-Inch Midrange Speaker

Owner's Manual

WE LIKE IT LOUD

www.DS18.com

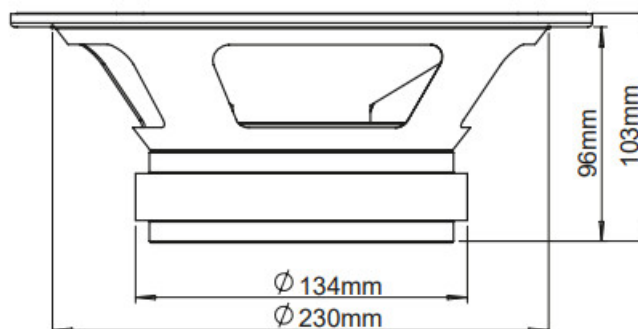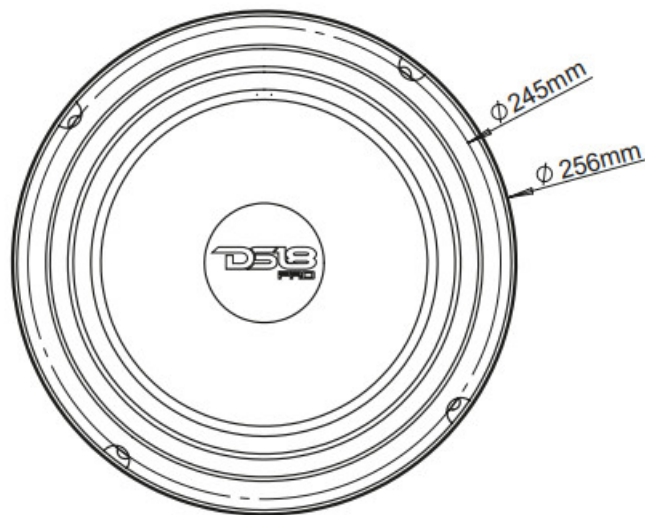

Contents

- [1 PRO-X10.4M 10-Inch Midrange Speaker](#)
- [2 THIELE SMALL PARAMETERS](#)
- [3 Documents / Resources](#)
 - [3.1 References](#)
- [4 Related Posts](#)

PRO-X10.4M 10-Inch Midrange Speaker

Overall Diameter	256mm(10.08")
Baffle Cutout Diameter	230mm(9.05")
Overall Depth	103mm(4.06")
Nominal Impedance	4Ω
Rms Power Handling	300 W
Maximum Power Handling	600 W
Sensitivity (1w/1m)	100.2 dB
Frequency Response	76-6.8 kHz
Voice Coil Diameter	50.8mm(2.0in)
Winding Material	CCAW
Magnet Weight	Ferrite 40 oz
Basket Material	Steel

THIELE SMALL PARAMETERS


Fs	76.3 Hz
Re	3.2Ω
Qes	0.886
Qms	15.
Qts	0.841
Vas	84.93dm3(0.51ft3)

SHIPPING PACKING

Shipping Box	570*295*260mm/4pcs
Shipping Weight	15kg

10" MIDRRMGE LOUDSPEAKER
RED COLOR STEEL BASKET

40 OZ HIGH STRENGTH FERRITE MIRGMET CLOTH EDGERMD M□M-PRESSED PAPER
 2.0 HIGH TEMPERATURE
 600 VOICE COIL SOD WATTS MRX POWER
 300 WATTS RMS POWER
 IMPEDRMCE H OHMS SENSITIVITY 100.2.08
 FREQUENCY RESPONSE is -6.8 kHz

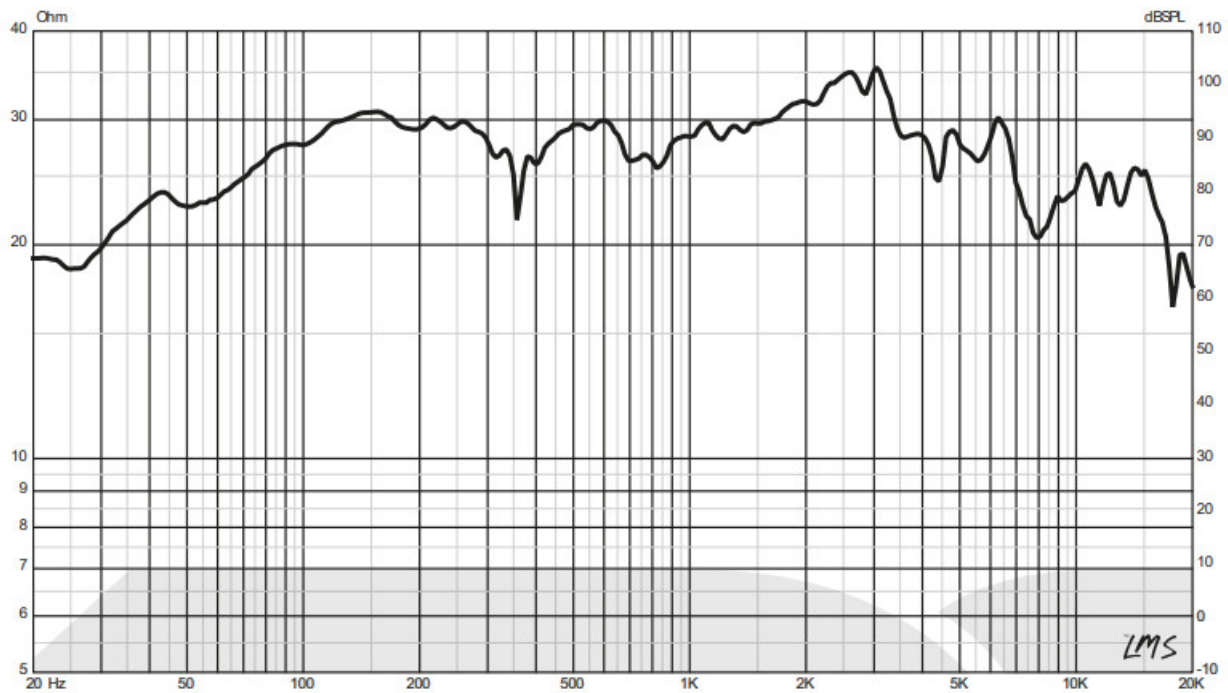

WE LIKE IT LOUD
www.DS18.com

Documents / Resources

	DS18 PRO-X10.4M 10-Inch Midrange Speaker [pdf] Owner's Manual PRO-X10.4M, 10-Inch Midrange Speaker, PRO-X10.4M 10-Inch Midrange Speaker
---	---

References

- [Official DS18 Pro Audio Store - Speakers, Subwoofers, Amps & More!](#)