Inateck KB06004-BK

Inateck Wireless Keyboard and Mouse Combo User Manual

Model: KB06004-BK

Introduction

This manual provides detailed instructions for the Inateck Wireless Keyboard and Mouse Combo, Model KB06004-BK. This combo offers versatile connectivity options (2.4 GHz wireless and Bluetooth), a full-size keyboard with an integrated phone/tablet holder, a comfortable wrist rest, and a silent mouse with adjustable DPI settings. Please read this manual thoroughly before using the product to ensure proper operation and longevity.



Figure 1: Inateck Wireless Keyboard and Mouse Combo

Your browser does not support the video tag.

Video 1: Overview of Inateck Keyboard and Mouse Combo features, including connectivity and design elements.

Package Contents

Before proceeding with setup, please verify that all items are present in the package:

- 1 x Wireless Keyboard
- 1 x Wireless Mouse
- 1 x USB Receiver (located in the mouse battery compartment)
- 2 x AAA Batteries (for keyboard)
- 1 x AA Battery (for mouse)
- 1 x User Manual (this document)



Figure 2: Package Contents

Setup

1. Battery Installation

1. **For the Keyboard:** Locate the battery compartment on the underside of the keyboard. Insert two AAA batteries, ensuring correct polarity (+/-).
2. **For the Mouse:** Locate the battery compartment on the underside of the mouse. Insert one AA battery, ensuring correct polarity (+/-). The USB receiver is also stored in this compartment.

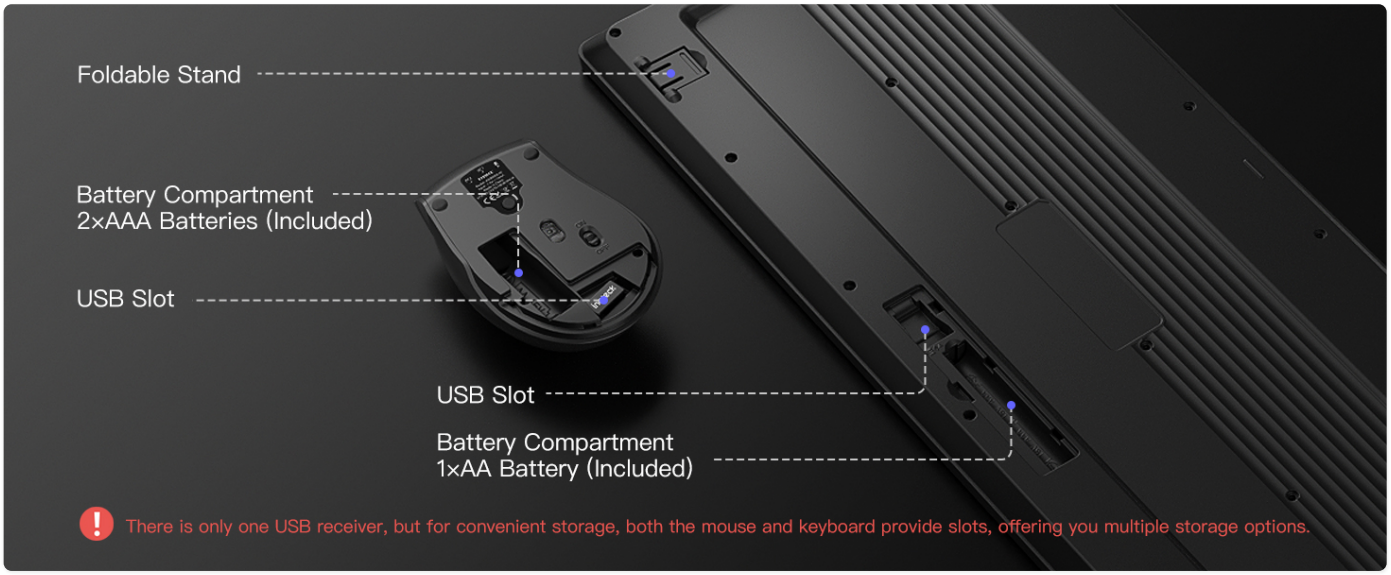


Figure 3: Battery and USB Receiver Locations

2. Connection Methods

The Inateck combo supports three connection modes: 2.4 GHz wireless via USB receiver, Bluetooth 1, and Bluetooth 2. You can switch between these modes using the dedicated buttons on the keyboard.



Figure 4: Connectivity Options

2.1. 2.4 GHz Wireless Connection (USB Receiver)

1. Remove the USB receiver from the mouse battery compartment.
2. Plug the USB receiver into an available USB port on your computer.
3. Turn on the keyboard and mouse using their respective power switches.
4. On the keyboard, press the**2.4G** button. The keyboard and mouse should automatically connect to your device.

2.2. Bluetooth Connection (BT1 / BT2)

1. Turn on the keyboard and mouse.
2. On the keyboard, press and hold either the**BT1** or **BT2** button for 3-5 seconds until the corresponding indicator light flashes rapidly. This indicates pairing mode.
3. On your device (computer, tablet, or smartphone), enable Bluetooth and search for new devices.
4. Select "Inateck Keyboard" and "Inateck Mouse" from the list of available devices to pair.

5. Once paired, the indicator light on the keyboard will stop flashing and remain solid.
6. To switch between paired Bluetooth devices, simply press the**BT1** or **BT2** button.

Figure 5: Device Compatibility

Operating Instructions

1. Keyboard Features

- **Full-Size Layout:** The keyboard features a standard 110-key layout, including a numeric keypad and function keys.
- **Integrated Phone/Tablet Holder:** A built-in slot at the top of the keyboard securely holds your smartphone or tablet (up to 11.9 inches) for convenient viewing. Note: Tablet devices only support vertical placement.
- **Comfortable Wrist Rest:** The wide, ergonomic wrist rest provides support to reduce fatigue during extended typing sessions. Adjustable tilt legs allow for a customized typing angle.

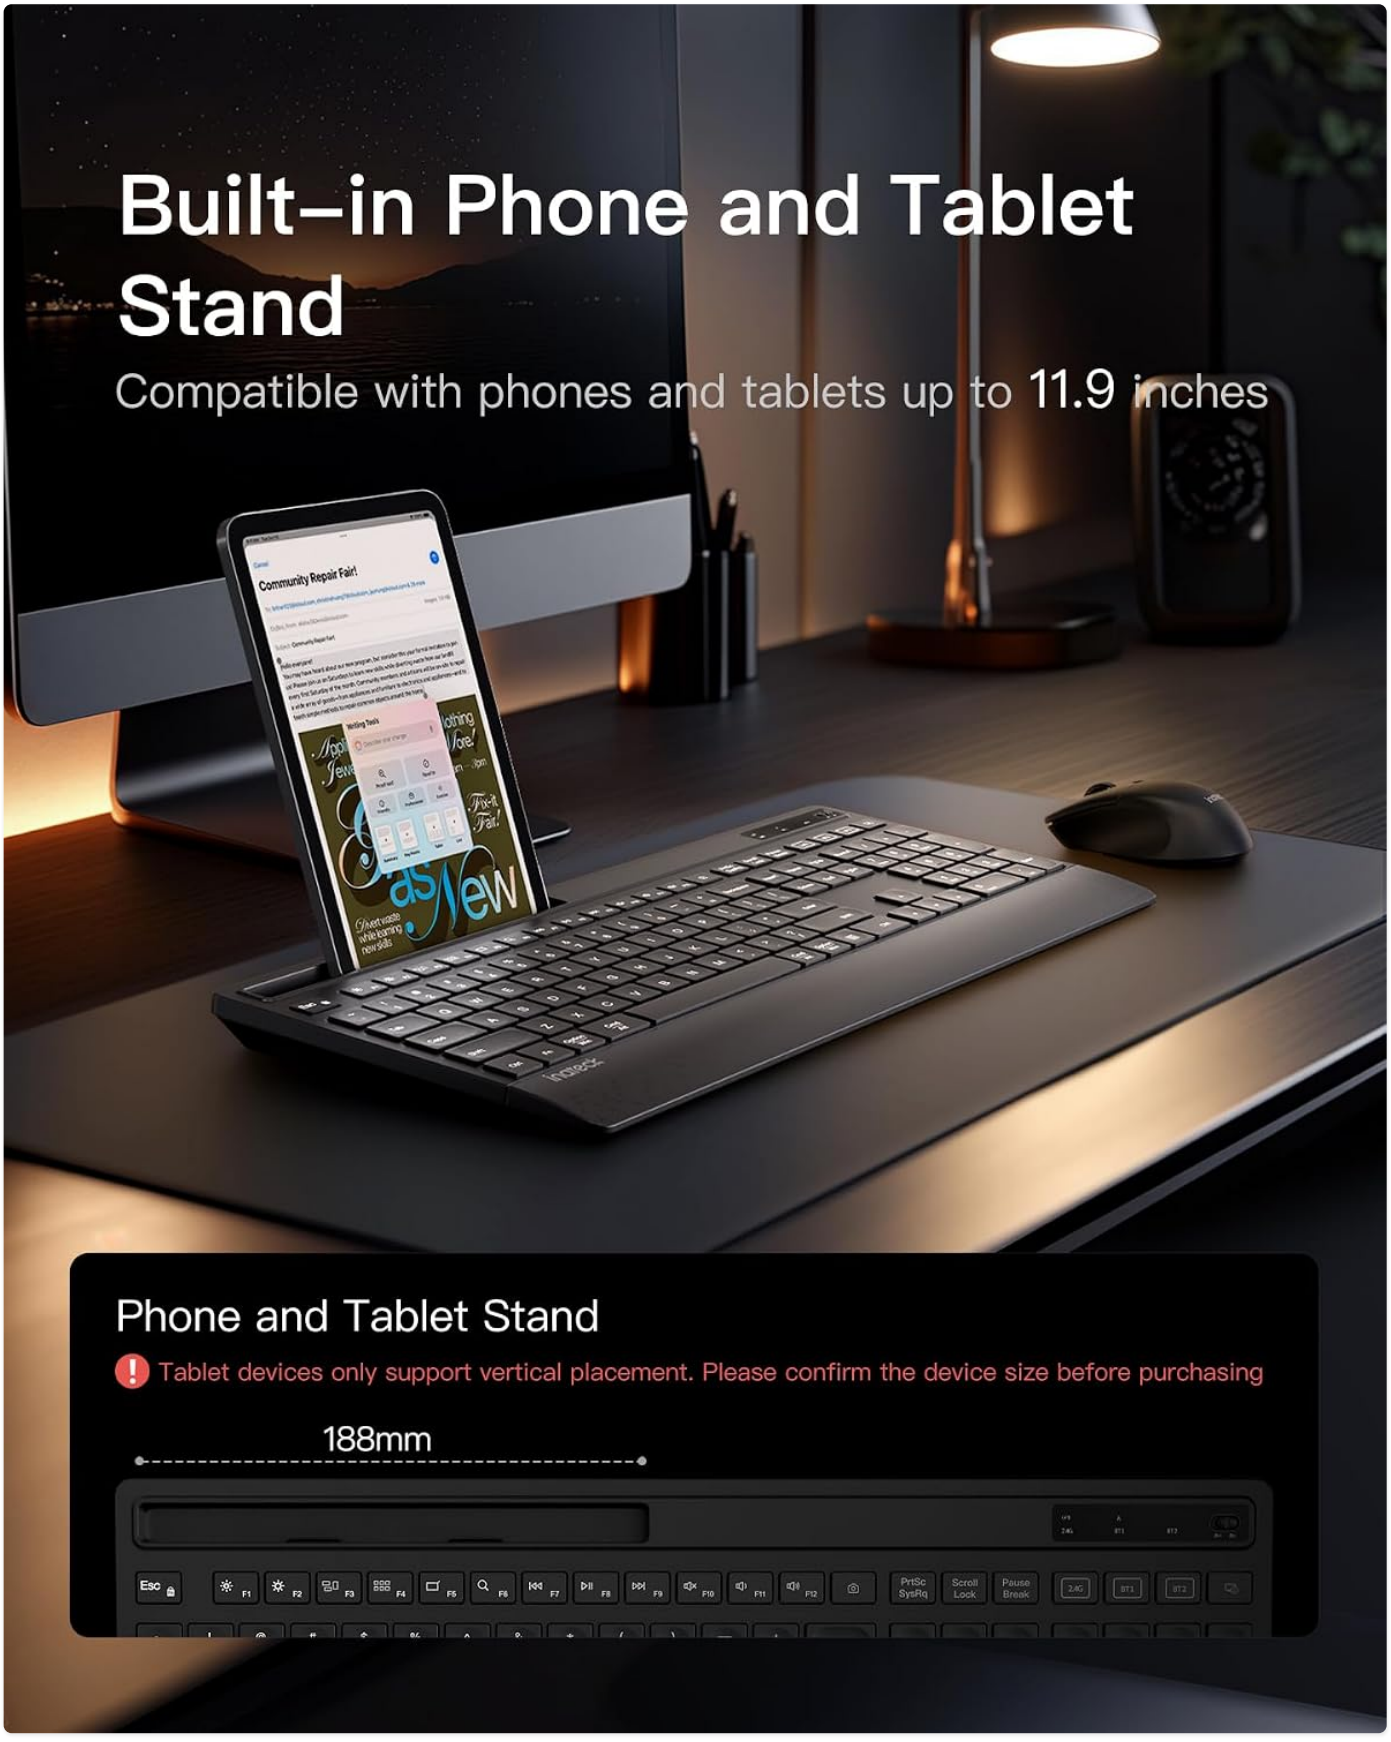


Figure 6: Built-in Phone and Tablet Stand

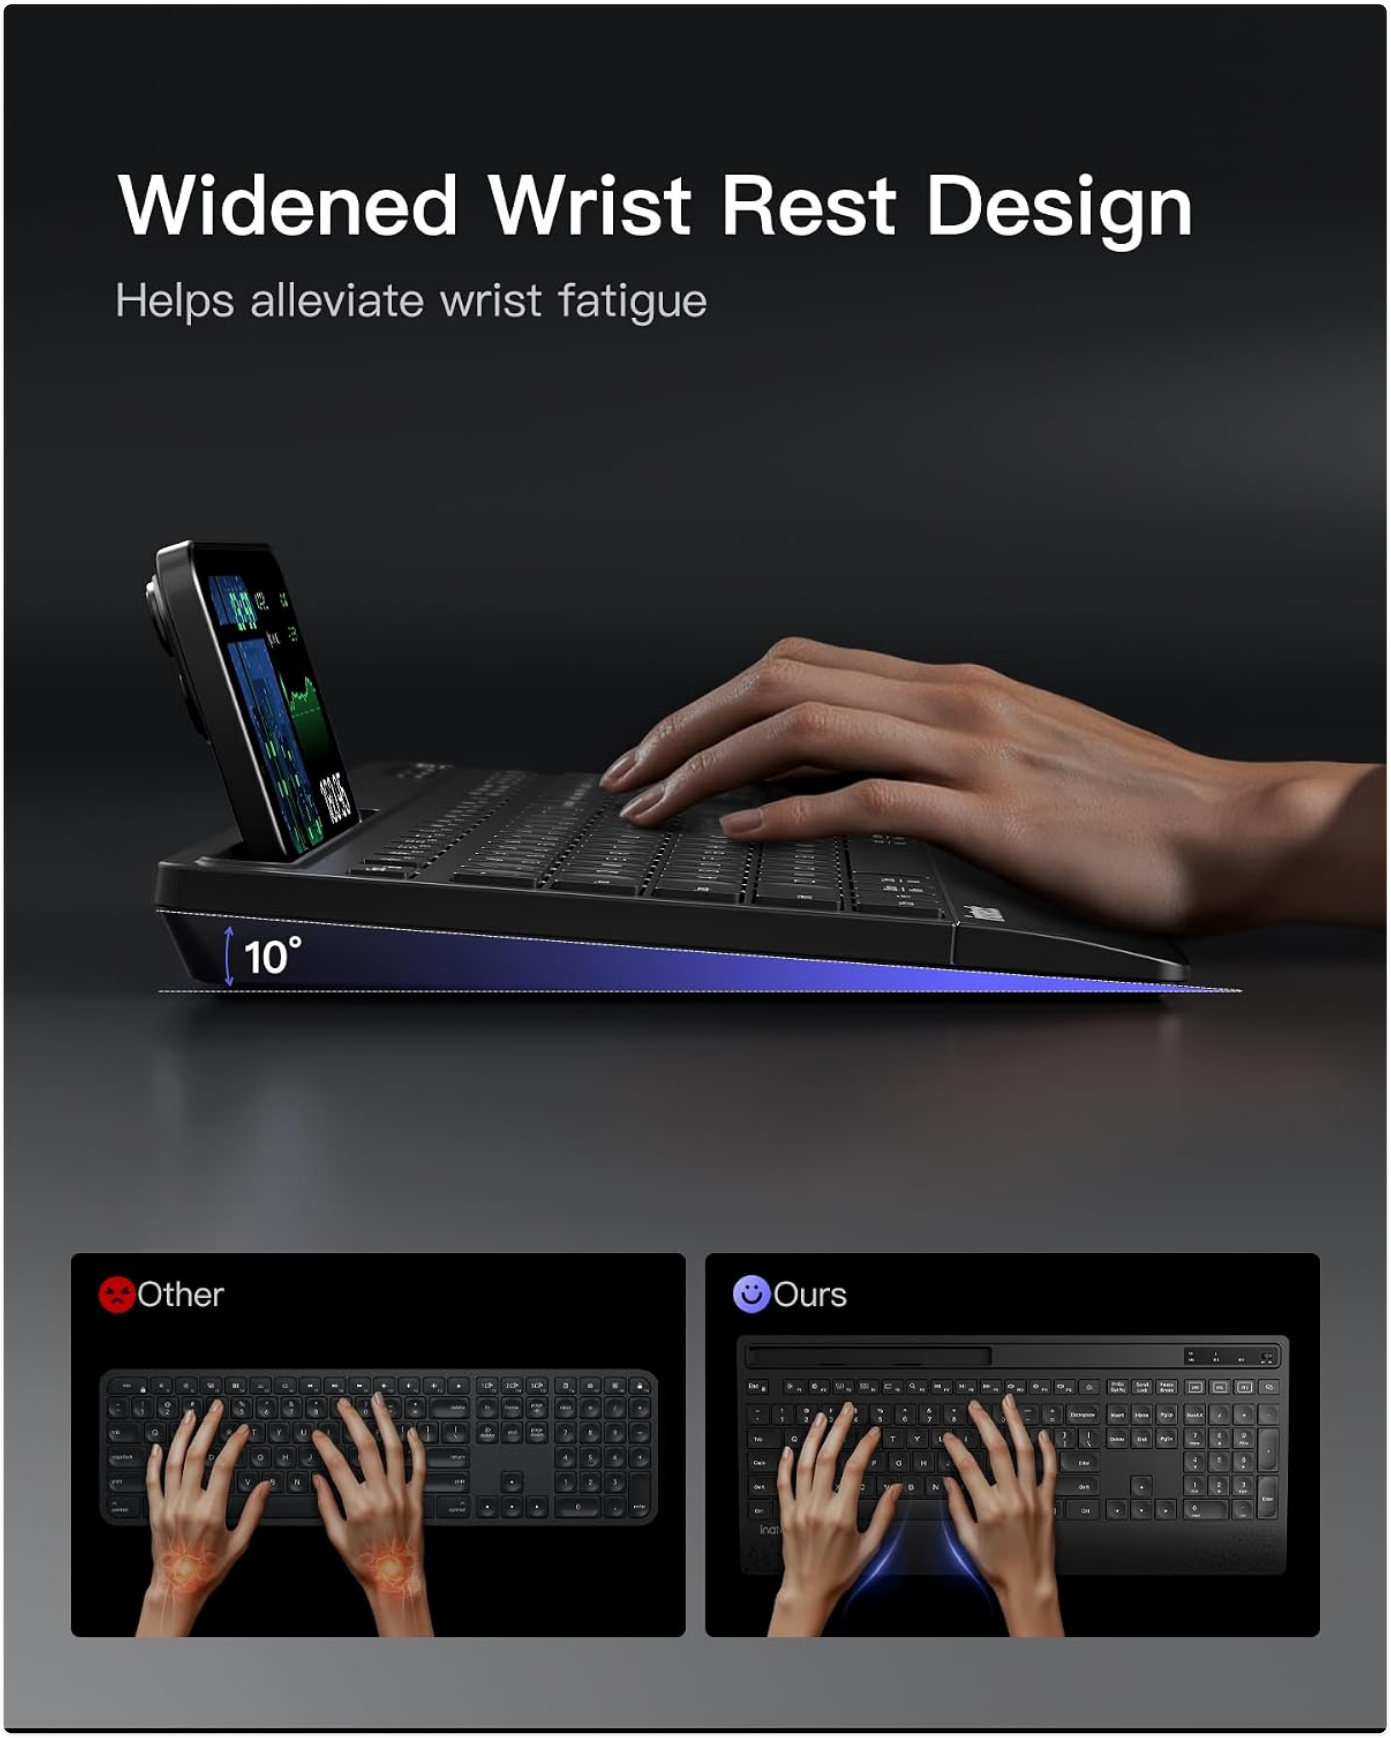


Figure 7: Widened Wrist Rest Design

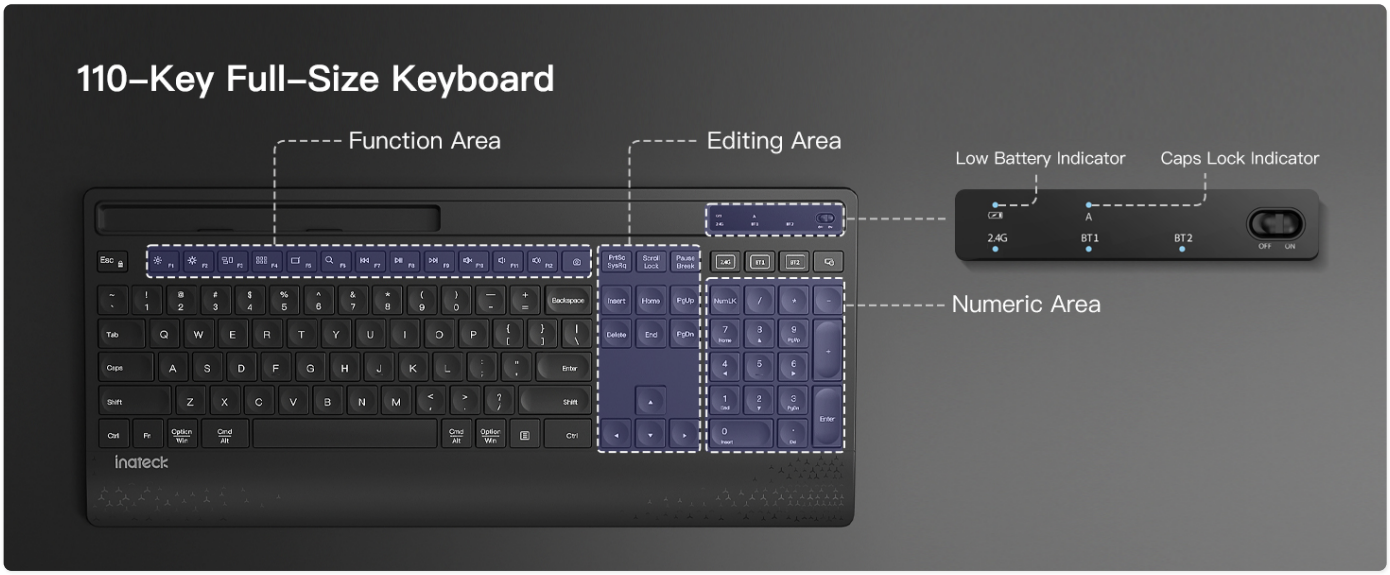


Figure 8: Keyboard Layout and Indicators

2. Mouse Features

- **Adjustable DPI:** The mouse offers three DPI settings (1000/1600/2400) to adjust cursor sensitivity. Press the DPI button on top of the mouse to cycle through the settings.
- **Silent Clicks:** The mouse is designed for quiet operation, reducing click noise by 95% compared to standard mice.
- **Ergonomic Design:** The contoured shape of the mouse provides a comfortable grip for extended use.



Figure 9: Mouse Ergonomics and DPI Settings

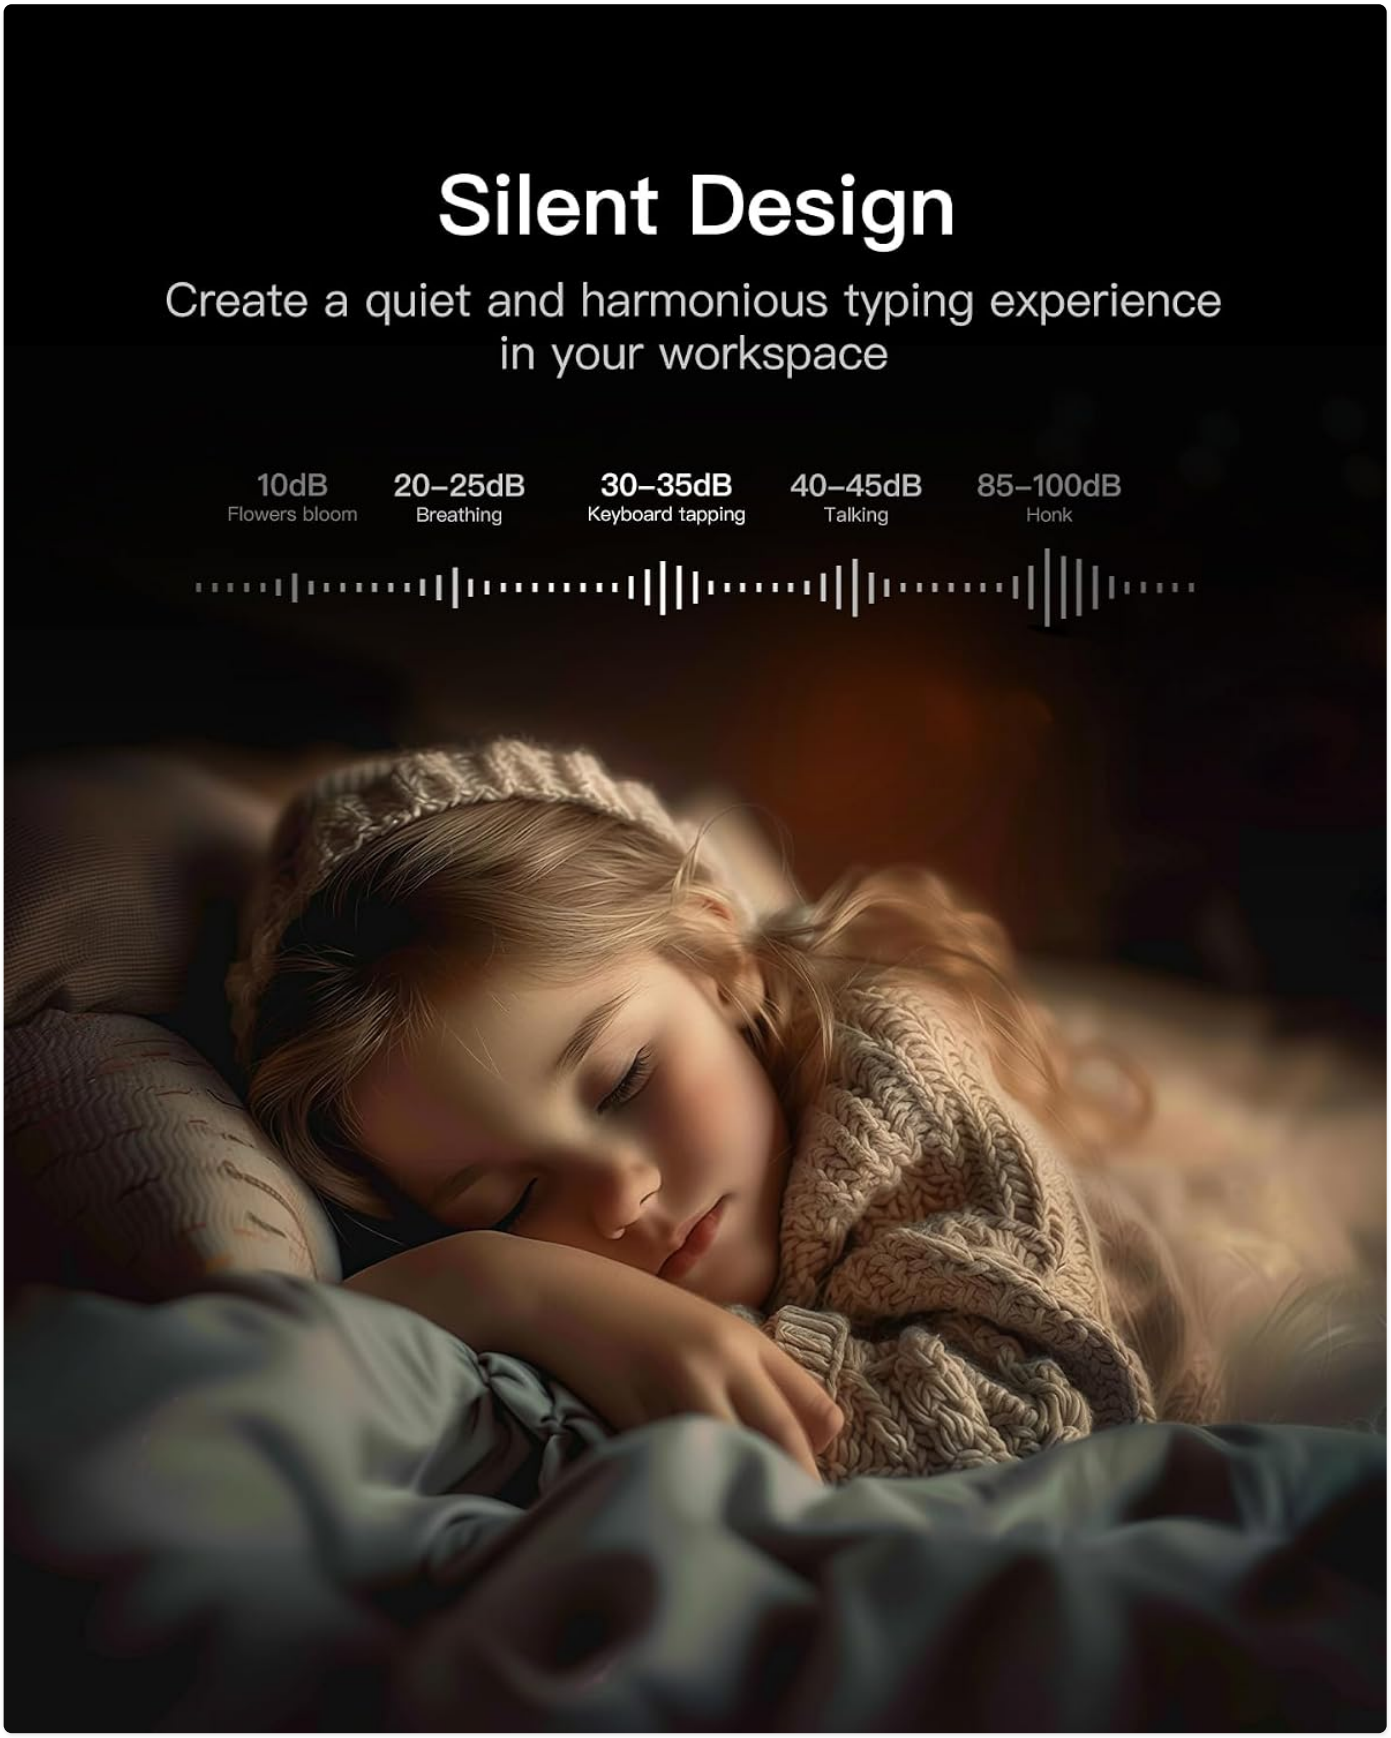


Figure 10: Silent Design for Quiet Operation

Power Management and Maintenance

1. Smart Power Saving

The keyboard and mouse are equipped with an intelligent sleep mode to conserve battery life. After 30 minutes of inactivity, they will enter sleep mode. To reactivate, simply press any key on the keyboard or click the mouse.



Figure 11: Smart Power Saving Features

2. Battery Replacement

When the low battery indicator on the keyboard illuminates, or if the mouse responsiveness decreases, it is time to replace the batteries. Refer to the "Battery Installation" section under Setup for instructions.

3. Cleaning

To clean the keyboard and mouse, use a soft, dry, lint-free cloth. For stubborn dirt, slightly dampen the cloth with water.

Avoid using harsh chemicals, abrasive cleaners, or excessive moisture.

Troubleshooting

Problem	Possible Cause	Solution
Keyboard/Mouse not responding	Low batteries; Incorrect connection mode; USB receiver not plugged in (for 2.4GHz); Bluetooth not paired.	Replace batteries; Ensure correct connection mode (2.4G, BT1, BT2) is selected; Re-insert USB receiver; Re-pair Bluetooth devices.
Lag or intermittent connection	Interference; Device too far from receiver/device; Low battery.	Move closer to the receiver/device (within 33 feet); Avoid strong electromagnetic interference; Replace batteries.
Mouse cursor erratic or not moving smoothly	Dirty sensor; Incorrect DPI setting; Uneven surface.	Clean the mouse sensor; Adjust DPI setting; Use on a smooth, opaque surface.
Cannot pair via Bluetooth	Keyboard/Mouse not in pairing mode; Device Bluetooth off; Interference.	Ensure BT1/BT2 light is flashing rapidly; Turn on Bluetooth on your device; Try pairing in a different location.

Specifications

Brand: Inateck

Model: KB06004-BK

Connectivity: 2.4 GHz Wireless, Bluetooth 5.0, Bluetooth 3.0

Keyboard Layout: Full-Size, 110 Keys

Keyboard Battery: 2 x AAA (included)

Mouse Battery: 1 x AA (included)

Mouse DPI Settings: 1000 / 1600 / 2400

Operating Range: Up to 33 feet (10 meters)

Compatible Devices: Laptop, Personal Computer, Tablet (Windows 7+, Mac OS 10.5+, Android 3.2+)

Keyboard Dimensions: Approximately 17.28 x 7.87 x 1.77 inches (43.9 x 20 x 4.5 cm)

Mouse Dimensions: Approximately 4.68 x 2.95 x 1.38 inches (11.9 x 7.5 x 3.5 cm)

Item Weight: 1.64 pounds (0.74 kg)



Figure 12: Product Dimensions

Warranty and Support

Inateck products are designed for reliability and performance. For any questions, technical support, or warranty inquiries, please contact Inateck customer service. Details can typically be found on the official Inateck website or through the seller from whom you purchased the product (Seller: TNTonline).
Please retain your proof of purchase for warranty purposes.

© 2025 Inateck. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question