

[Manuals.plus](#) /

› [DreamQuest](#) /

› DreamQuest Mini PC Intel N95 User Manual

DreamQuest N95

DreamQuest Mini PC Intel N95 User Manual

Model: N95

1. INTRODUCTION

Thank you for choosing the DreamQuest Mini PC Intel N95. This compact and powerful mini computer is designed for various applications, from office tasks to home entertainment, offering a complete Windows/Linux desktop experience in a small form factor. This manual provides essential information for setting up, operating, and maintaining your device.



Memory
12GB DDR5 4800MT/s



SSD
512GB M.2 SSD



Intel Alder Lake N95 CPU



WiFi & Bluetooth
WiFi 6 & Bluetooth 5.3



Gigabit Ethernet
1000Mbps



Intel UHD
1200MHz



4K HD
4096 x 2160@60Hz

Support 4K Triple Displays



Full-Function Dual TypeC

- Data transfer supportive (10GB/s)
- Support 4K Video Output
- Support Power In / Out

Image 1.1: Overview of DreamQuest Mini PC key features.

Key features include:

- **Processor:** Intel N95 (up to 3.4GHz) with Intel UHD Graphics 1.20GHz.
- **Memory:** 12GB DDR5 RAM (4800MHz).
- **Storage:** 512GB M.2 2280 SSD, expandable up to 2TB.
- **Operating System:** Pre-installed Windows 11 Pro, compatible with Linux and Ubuntu.
- **Connectivity:** WiFi 6, Bluetooth 5.3, Gigabit Ethernet.
- **Display Output:** Dual Type-C and Dual HDMI 2.0 ports supporting triple 4K@60Hz displays.
- **Ports:** 4x USB 3.2 Gen 2 (10Gbps), 2x Type-C (10Gbps, PD IN 12V@3A, PD OUT 5V@3A, Video Out), Audio Output.
- **Cooling:** Built-in active cooling fan.

2. WHAT'S INCLUDED

Upon unboxing your DreamQuest Mini PC, please verify that all the following items are present:

Inside The Box, What You Will Get

· Packing Box · Mini PC · User Manual · HD Cables · Power Adapter



Packing Box



Mini PC



User Manual



HD Cables



US Plug Charger

Image 2.1: Items included in the package.

- DreamQuest Mini PC Unit
- User Manual
- HD Cables (HDMI)
- Power Adapter (US Plug Charger)

3. SETUP INSTRUCTIONS


Follow these steps to set up your DreamQuest Mini PC:

1. **Connect to a Display:** Use an HDMI cable to connect the Mini PC to your monitor, TV, or projector. The device supports up to three 4K@60Hz displays via its two HDMI 2.0 ports and two full-featured Type-C ports.
2. **Connect Peripherals:** Plug in your keyboard and mouse to the available USB 3.2 ports.

3. **Network Connection:** For a wired connection, connect an Ethernet cable to the Gigabit Ethernet port. For wireless, ensure your WiFi network is available after initial boot.
4. **Power On:** Connect the power adapter to the Mini PC's power input and then plug it into a wall outlet. The device will automatically power on or can be powered on using the power button.
5. **Initial Boot:** The Mini PC comes with Windows 11 Pro pre-installed. Follow the on-screen instructions to complete the initial Windows setup.

The Mini PC. Small But Perfectly Formed

Specs: 2x HD · 4x USB · 2x TypeC · Audio · Gigabit Ethernet · Wi-Fi 6 · BT5.3

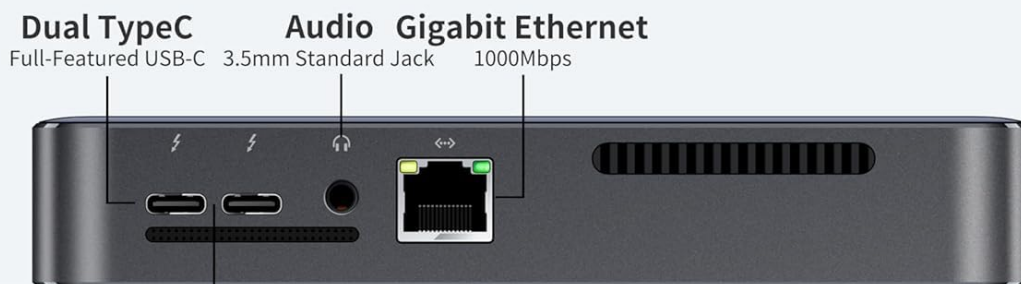

- ⚡ Support Power In / Out
- 4K Support 4K Video Output
- 📶 Data transfer supportive (10GB/s)

Image 3.1: Port layout for connecting peripherals and displays.

Important Note:

Only Type-C chargers that meet 12V/3A (36W) are supported for stable operation when using Type-C for power input.

4. OPERATING INSTRUCTIONS

4.1. Display Configuration

The DreamQuest Mini PC supports up to three independent 4K@60Hz displays. Connect your displays using the available HDMI and Type-C ports. Once connected, Windows will automatically detect the displays. You can configure display settings (resolution, orientation, extended/duplicate mode) via Windows Display Settings.

Support Triple-Screen Display with 4K

Experience entertainment, creativity, and productivity with three seamless UHD displays.



Image 4.1: Triple-screen display capability.

4.2. LED Light Control

The Mini PC features an LED lighting indicator. To control the LED light (ON/OFF), follow these steps:

1. Restart the Mini PC.
2. During startup, repeatedly press the **Delete** key to enter the BIOS setup.
3. Navigate through the BIOS menu to find the LED Light setting.
4. Set the LED Light option to **Enabled** or **Disabled** as desired.
5. Save changes and exit the BIOS.

4.3. Operating System Compatibility

While Windows 11 Pro is pre-installed, the DreamQuest Mini PC is fully compatible with other operating systems such as Linux and Ubuntu. Users can install their preferred system for various uses.



Image 4.2: Supported operating systems and external devices.

5. SPECIFICATIONS

Detailed technical specifications for the DreamQuest Mini PC Intel N95:

Feature	Specification
Model Number	N95
CPU Model	Intel N95
CPU Speed	Up to 3.4 GHz
RAM Memory Installed Size	12 GB DDR5
Memory Speed	4800 MHz
Memory Storage Capacity	512 GB M.2 SSD (Expandable up to 2TB)
Operating System	Windows 11 Pro
Graphics Card Description	Integrated Intel UHD Graphics
Display Resolution Maximum	3840x2160 (4K@60Hz)
Video Output Interface	2x HDMI, 2x USB-C (Video Out)
Total USB Ports	4x USB 3.2 Gen 2 (10Gbps)
Type-C Ports	2x Full-featured Type-C (10Gbps, PD IN/OUT, Video Out)
Network Connectivity	WiFi 6, Bluetooth 5.3, Gigabit Ethernet
Cooling Method	Smart Fan (Active Cooling)
Parcel Dimensions	16.8 x 14.4 x 6.6 cm

Feature	Specification
Item Weight	550 g

6. MAINTENANCE

To ensure the longevity and optimal performance of your DreamQuest Mini PC, consider the following maintenance tips:

- **Keep it Clean:** Regularly clean the exterior of the Mini PC with a soft, dry cloth. Ensure ventilation openings are free from dust and debris to prevent overheating.
- **Optimal Airflow:** Place the Mini PC in a well-ventilated area. Avoid obstructing the cooling fan vents. The built-in smart fan adjusts based on CPU temperature to maintain performance and prevent overheating.
- **Software Updates:** Keep your operating system and drivers updated. Regular updates improve security, performance, and compatibility.
- **Data Backup:** Periodically back up important data to an external drive or cloud storage to prevent data loss.
- **Power Management:** Use the provided power adapter. Avoid frequent abrupt power cuts; always shut down the system properly.

Enjoy Powerful Performance in Silence

Built-in smart fan, intelligently identifies CPU temperature and switches the fan



Image 6.1: Internal cooling fan for powerful performance in silence.

7. TROUBLESHOOTING

If you encounter issues with your DreamQuest Mini PC, refer to the following common solutions:

1. No Display Output:

- Ensure all display cables (HDMI, Type-C) are securely connected to both the Mini PC and the monitor.
- Verify the monitor is set to the correct input source.
- Test with a different cable or monitor if possible.

2. Windows Not Activated:

- While Windows 11 Pro is pre-installed, it may require online activation. Ensure your Mini PC is connected to the internet.
- If activation issues persist, contact Microsoft support or the seller for assistance.

3. Wi-Fi or Bluetooth Connectivity Issues:

- Go to Windows Settings > Network & Internet (for Wi-Fi) or Bluetooth & devices (for Bluetooth).
- Toggle Wi-Fi or Bluetooth off and then back on.
- Ensure drivers are up to date. You can check Device Manager for any exclamation marks next to network or Bluetooth adapters.
- Restart the Mini PC.

4. Excessive Fan Noise:

- Ensure the Mini PC is placed on a flat, hard surface with adequate ventilation.
- Check for dust accumulation in the vents and clean them if necessary.
- High CPU usage can cause the fan to spin faster. Close unnecessary applications to reduce load.

5. System Crashes or Blue Screens:

- Ensure all Windows updates are installed.
- Update graphics drivers directly from the Intel website if Windows Update drivers cause instability.
- If issues persist, consider performing a system restore or reinstalling Windows.

8. WARRANTY AND SUPPORT

Your DreamQuest Mini PC is backed by a **1-year warranty** from the date of purchase.

To claim warranty support or for any questions or concerns, please follow these steps:

1. Log in to your Amazon account.
2. Go to "Your Orders."
3. Find the order for your DreamQuest Mini PC.
4. Click on "Contact Seller."

Our support team is ready to assist you with any product-related inquiries.

© 2026 DreamQuest. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question