



casa systems NS-02 CloudMesh Satellite Seamless Wi-Fi Coverage User Guide

[Home](#) » [casa systems](#) » casa systems NS-02 CloudMesh Satellite Seamless Wi-Fi Coverage User Guide 

Contents



- [1 casa systems NS-02 CloudMesh Satellite Seamless Wi-Fi Coverage](#)
- [2 WHAT YOU WILL NEED](#)
- [3 INSTRUCTIONS](#)
- [4 WIRELESS BRIDGE](#)
- [5 DOWNLOAD THE CLOUDMESH APP](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)



casa systems NS-02 CloudMesh Satellite Seamless Wi-Fi Coverage




WHAT YOU WILL NEED

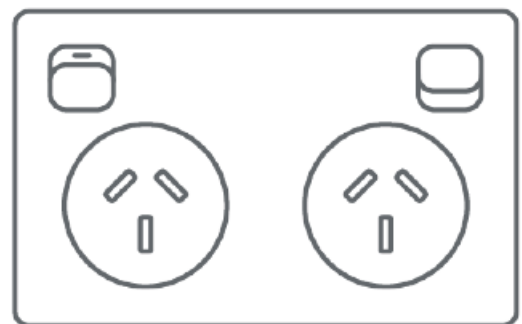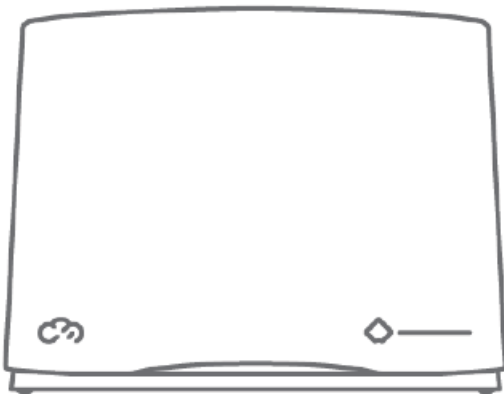


- NetComm CloudMesh Gateway connected to the Internet
- A power point near to where you want to place the CloudMesh Satellite

INSTRUCTIONS

Your CloudMesh Satellite works best when it is placed in a central location to the area you want to cover. Ideally, it should be located no more than two rooms away from the CloudMesh Gateway.

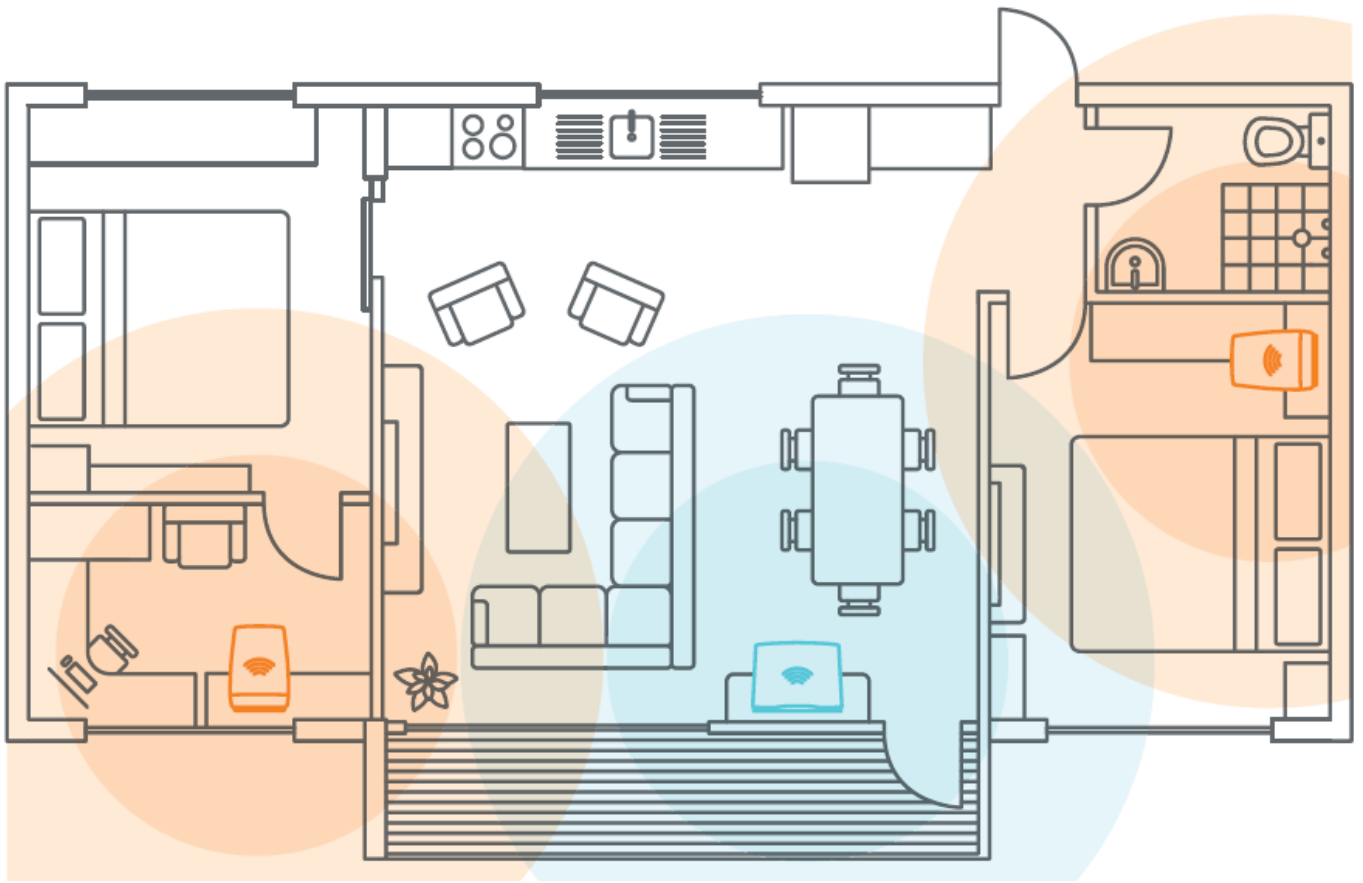



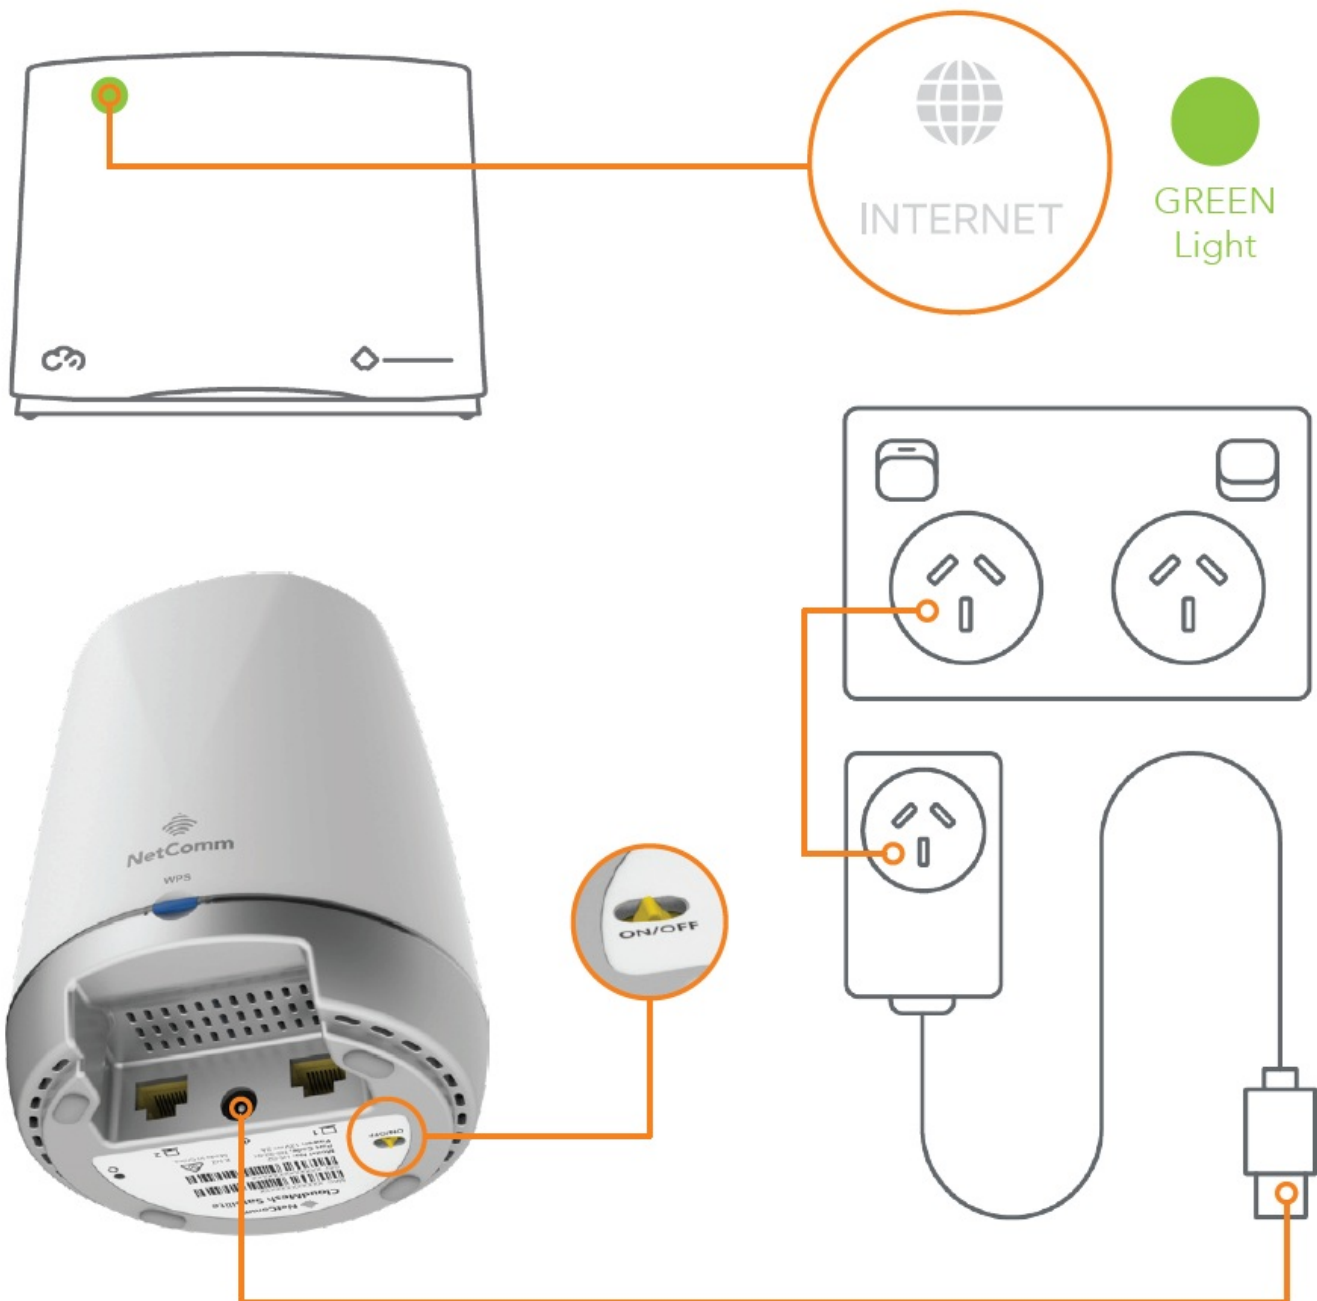

Connect the Power Adapter to the CloudMesh Satellite. Ensure that the power switch is in the ON position.











Wait ten minutes for the CloudMesh Satellite to initialise and then check the light status. A solid white or blue light means the satellite has been paired with the Gateway and is ready to use. A solid red light means that the Satellite needs to be moved closer to the Gateway. If after ten minutes, the light is still flashing blue, follow the instructions on the page 14.









Your CloudMesh Satellite light follows this sequence when first turned on:

	 <p>Blinking green</p>	<p>Powering up</p>
	 <p>Blinking blue</p>	<p>Ready for pairing</p>
	<p>See next page & page 14 for more instructions</p>	

When connected to the CloudMesh Gateway, the light shows the signal strength as follows:

	 Solid white	Good signal
	 Solid blue	Medium signal
	 Solid red	Poor signal
	 Blinking blue	No signal / too far from gateway / not connected to mesh network


The light may also show as:

	 Solid pink	Paired but no Internet connection
	 Blinking purple	WPS pairing activated
	 Blinking pink	Pairing in progress
	 Solid green	Wired connection to NF20MESH


Note: Refer to the User Guide for a full set of light statuses.

You can extend the range of your network using multiple CloudMesh Satellites. These can be wirelessly connected to the CloudMesh Gateway. Once you have decided where to place the CloudMesh Satellites, always power up the Satellite closest to the CloudMesh Gateway first. Once you have confirmed this Satellite is working,

then power up and connect the second CloudMesh Satellite.

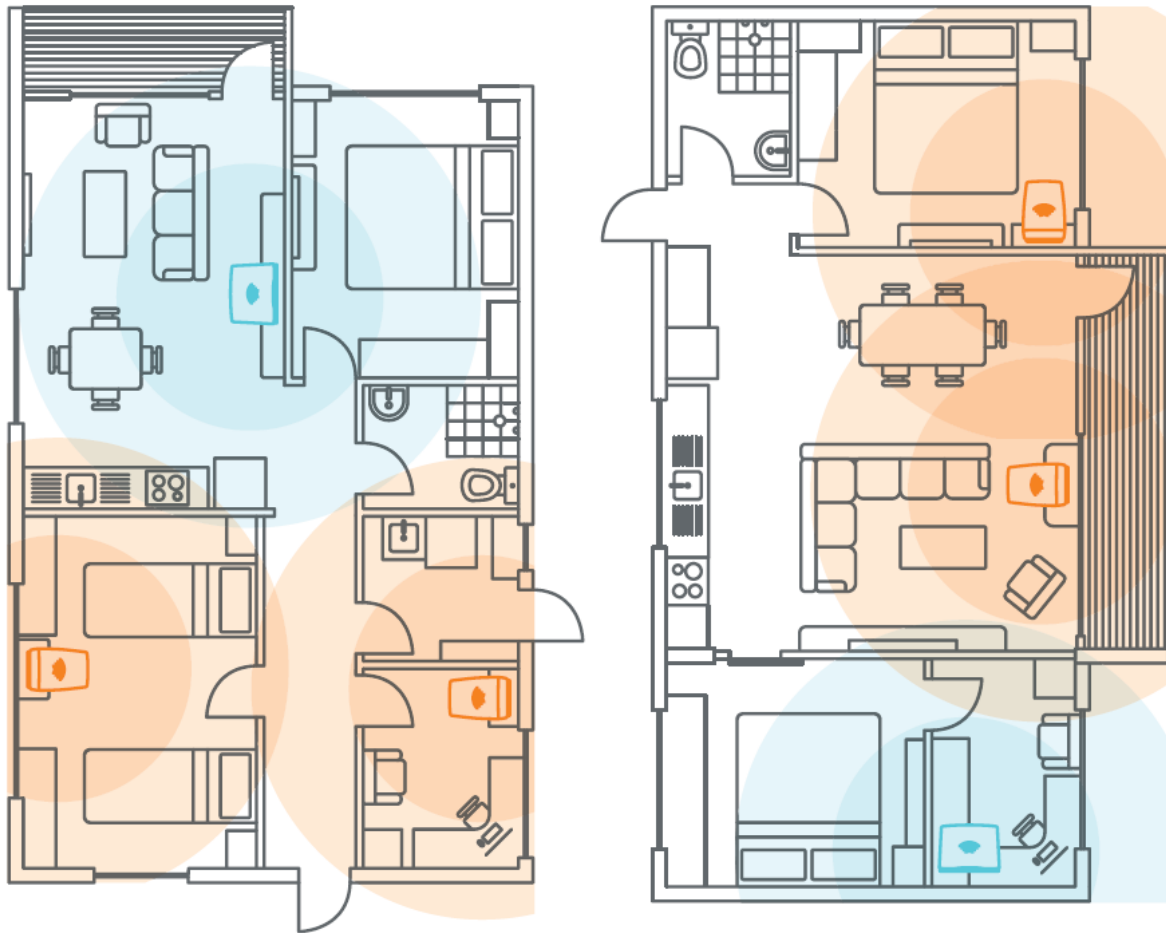

If the CloudMesh Satellite light is still blinking blue after five minutes, you will need to pair it with the CloudMesh Gateway. Place the CloudMesh Satellite next to your CloudMesh Gateway. Ensure that the CloudMesh Gateway is connected to the Internet.

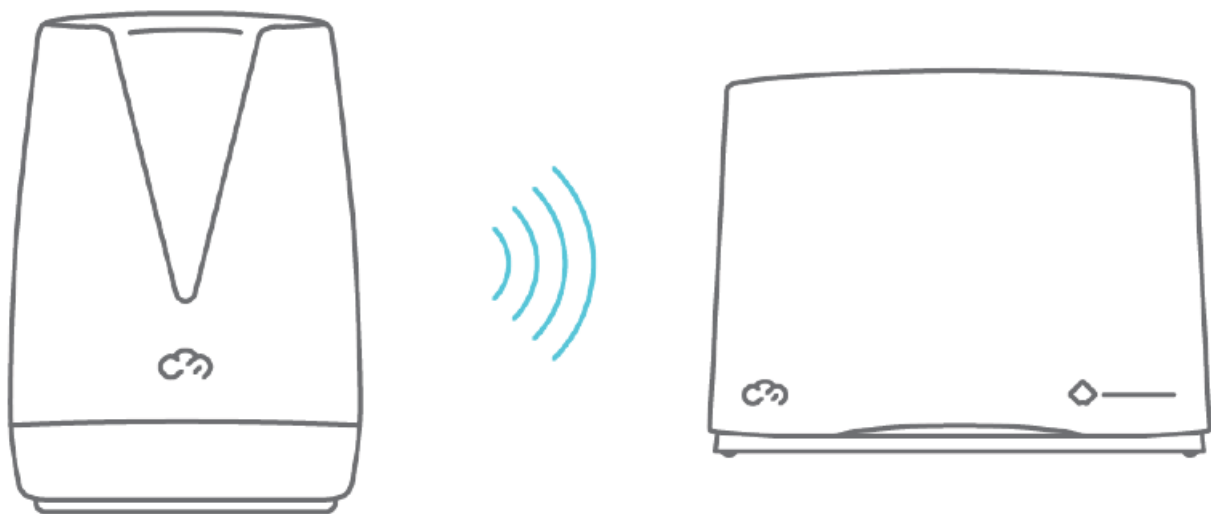

Press and release the WPS button on the Satellite, then press and release the WPS button on the Gateway within two minutes.




Network Ports for non-wireless devices. Up to two devices may be connected.




WIRELESS BRIDGE

The CloudMesh Satellite can provide Internet access to devices that are not wireless, such as desktop PCs or Smart TVs. Up to two devices may be connected in this way per CloudMesh Satellite, connecting at the back of the Satellite using the included yellow network cable.

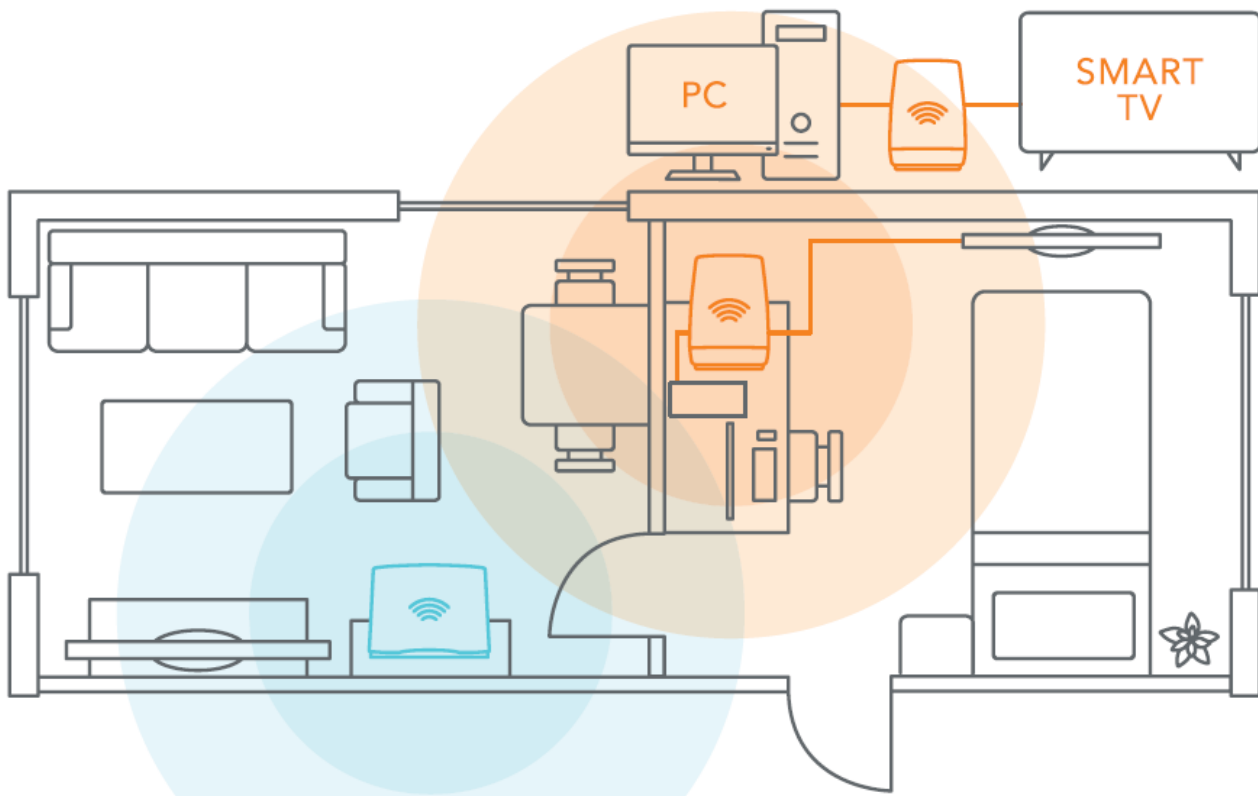

TO TURN OFF LED LIGHTS

To control the Satellite's LED light, press and hold the WPS button for five seconds to switch the light's display ON or OFF.

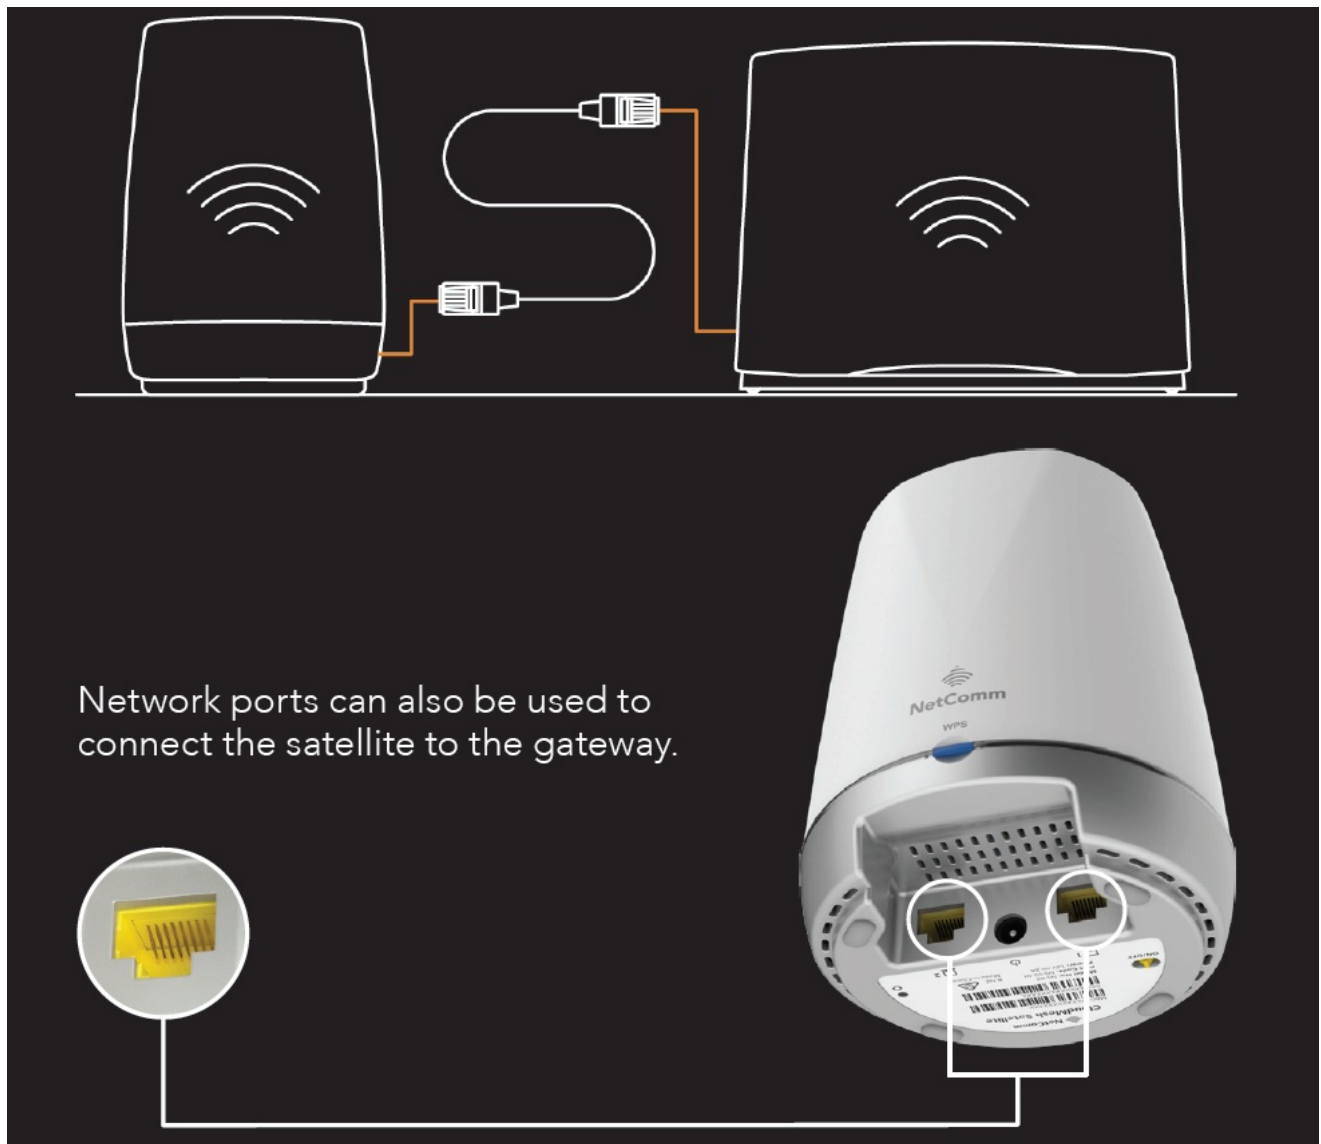

DOWNLOAD THE CLOUDMESH APP

Finding the best place for your CloudMesh Satellite is easy using the CloudMesh App.

- Satellite placement assistance
- WiFi Analytics
- WiFi Troubleshooting
- Setup does not require the App



Get it on the **App Store** or **Google Play**.

NetComm Wireless Limited is part of Casa Systems, Inc. Casa Systems, the future of NetComm

ANZ HEAD OFFICE SYDNEY

Casa Systems Inc.
18-20 Orion Road, Lane Cove NSW 2066, Sydney
Australia | +61 2 9424 2070
www.netcomm.com

CORPORATE HEADQUARTERS ANDOVER

Casa Systems Inc.
100 Old River Road,
Andover, MA 01810
USA | +1 978 688 6706
www.casa-systems.com

Documents / Resources



[casa systems NS-02 CloudMesh Satellite Seamless Wi-Fi Coverage](#) [pdf] User Guide
NS-02, CloudMesh Satellite Seamless Wi-Fi Coverage, NS-02 CloudMesh Satellite Seamless
Wi-Fi Coverage, Seamless Wi-Fi Coverage, Wi-Fi Coverage

References

- [Home - Casa Systems](#)
- [Home - Casa Systems](#)