


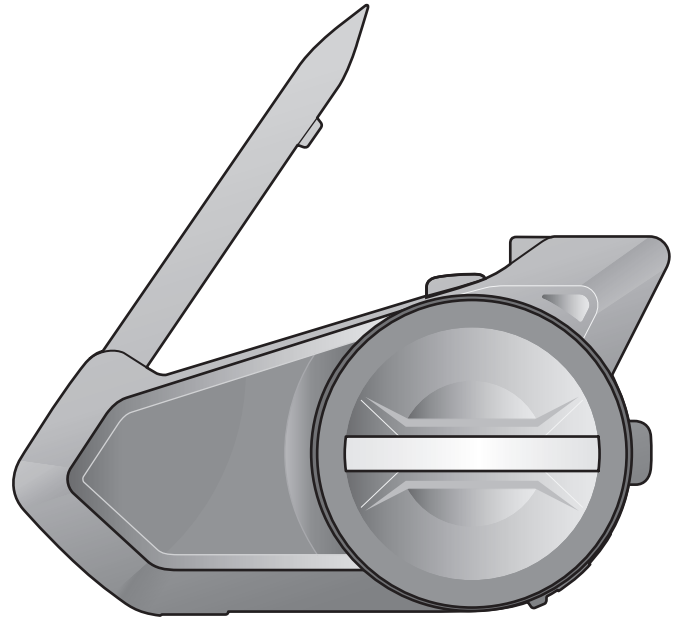

Harley-Davidson Audio 50S

MOTORCYCLE BLUETOOTH® COMMUNICATION
SYSTEM WITH MESH INTERCOM™

USER'S GUIDE

Version 1.0.0

ENGLISH

LEGEND:



Tap button/Jog Dial the specified number of times



Press and Hold button/Jog Dial for the specified amount of time



Rotate Jog Dial clockwise (right) or counterclockwise (left).



Rotate while Pressing Jog Dial clockwise (right) or counterclockwise (left).



"Hello"

Audible prompt

TABLE OF CONTENTS

1.	ABOUT THE HARLEY-DAVIDSON AUDIO 50S	8
1.1	Product Details	8
1.1.1	Headset Main Unit	8
1.1.2	Universal Clamp Kit	8
1.2	Package Contents	9
2.	INSTALLING THE HEADSET ON YOUR HELMET	10
2.1	Helmet Installation	10
2.2	Using the Glued Surface Mounting Adapter	11
2.3	Switching the Microphone	13
2.3.1	Wired Boom Microphone	13
2.3.2	Wired Microphone	14
2.4	Earbuds	14
2.5	External Mesh Intercom Antenna	14
3.	GETTING STARTED	15
3.1	Button	15
3.2	Downloadable Software	15
3.2.1	SENA MOTORCYCLES App	15
3.2.2	Boom Audio Bluetooth Device Manager	16
3.3	Powering On and Off	16
3.4	Charging	16
3.5	Checking the Battery Level	17
3.6	Volume Adjustment	17

4. PAIRING THE HEADSET WITH OTHER BLUETOOTH DEVICES18

4.1 Phone Pairing18

4.1.1 Pairing When the Harley-Davidson Audio 50S is Turned Off18

4.1.2 Pairing When the Harley-Davidson Audio 50S is Turned On19

4.2 Pairing with the H-D WHIM Wireless Headset Interface Module20

4.3 Second Mobile Phone Pairing - Second Mobile Phone, GPS, and SR1021

4.4 Advanced Selective Pairing: Hands-Free or A2DP Stereo21

4.4.1 Phone Selective Pairing - Hands-Free Profile22

4.4.2 Media Selective Pairing - A2DP Profile22

4.5 GPS Pairing23

5. MOBILE PHONE USAGE24

5.1 Making and Answering Calls24

5.2 Siri and Google Assistant24

5.3 Speed Dialing25

5.3.1 Assigning Speed Dial Presets25

5.3.2 Using Speed Dial Presets25

6. STEREO MUSIC26

6.1 Playing Music with Bluetooth Devices26

6.2 Playing Music with non-Bluetooth Devices26

6.3 Music Sharing27

7.

MESH INTERCOM

28

7.1

What is Mesh Intercom?

28

7.1.1

Open Mesh

29

7.1.2

Group Mesh

30

7.2

Starting Mesh Intercom

30

7.3

Using the Mesh in Open Mesh

30

7.3.1

Channel Setting (Default: channel 1)

31

7.4

Using Mesh in Group Mesh

32

7.4.1

Creating a Group Mesh

32

7.4.2

Joining an Existing Group Mesh

33

7.5

Reset Mesh

35

7.6

Toggling Open Mesh/Group Mesh

35

7.7

Enable/Disable Mic (Default: Enable)

35

8.

BLUETOOTH INTERCOM

36

8.1

Intercom Pairing

36

8.1.1

Using the Smart Intercom Pairing (SIP)

36

8.1.2

Using the Button

37

8.2

Two-Way Intercom

38

8.3

Multi-Way Intercom

39

8.3.1

Starting a Three-Way Intercom Conference

39

8.3.2

Starting a Four-Way Intercom Conference

40

8.3.3

Ending Multi-Way Intercom

41

8.4

Three-Way Conference Phone Call with Intercom Users

41

8.5

Group Intercom

42

8.6

Mesh Intercom Conference with Bluetooth Intercom Participant

43


8.7	Universal Intercom	45
8.8	Mesh Intercom Conference with Two-way Universal Intercom Participant	46
9.	USING THE FM RADIO	47
9.1	FM Radio On/Off	47
9.2	Seek and Save Radio Stations	47
9.3	Scan and Save Radio Stations	48
9.4	Temporary Station Preset	49
9.5	Navigating Preset Stations	49
9.6	Region Selection	49
10.	AMBIENT MODE	50
11.	VOICE COMMAND	51
12.	FUNCTION PRIORITY AND FIRMWARE UPGRADES	53
12.1	Function Priority	53
12.2	Firmware Upgrades	53
12.2.1	Using the WiFi Adapter	53
12.2.2	Using the Boom Audio Bluetooth Device Manager	54
13.	CONFIGURATION SETTING	55
13.1	Headset Configuration Setting	55
13.1.1	Delete All Pairings	56
13.1.2	Remote Control Pairing	56

13.2 Software Configuration Setting	56
13.2.1 Speed Dial	56
13.2.2 Channel Setting (Default: channel 1)	56
13.2.3 Headset Language	56
13.2.4 Audio Equalizer (Default: Music Balance)	57
13.2.5 VOX Phone (Default: Enable)	57
13.2.6 VOX Intercom (Default: Disable)	57
13.2.7 VOX Sensitivity (Default: 3)	57
13.2.8 Bluetooth Intercom Audio Multitasking (Default: Disabled)	58
13.2.9 Intercom-Audio Overlay Sensitivity (Default: 3)	58
13.2.10 Audio Overlay Volume Management (Default: Disable)	58
13.2.11 HD Intercom (Default: Enable)	59
13.2.12 HD Voice (Default: Enable)	59
13.2.13 Smart Volume Control (Default: Disable)	59
13.2.14 Sidetone (Default: Disable)	59
13.2.15 Voice Prompt (Default: Enable)	60
13.2.16 RDS AF Setting (Default: Disable)	60
13.2.17 FM Station Guide (Default: Enable)	60
13.2.18 Advanced Noise Control™ (Default: Enable)	60
14. TROUBLESHOOTING	61
14.1 Fault Reset	61
14.2 Factory Reset	62


1. ABOUT THE HARLEY-DAVIDSON AUDIO 50S

1.1 Product Details


1.1.1 Headset Main Unit

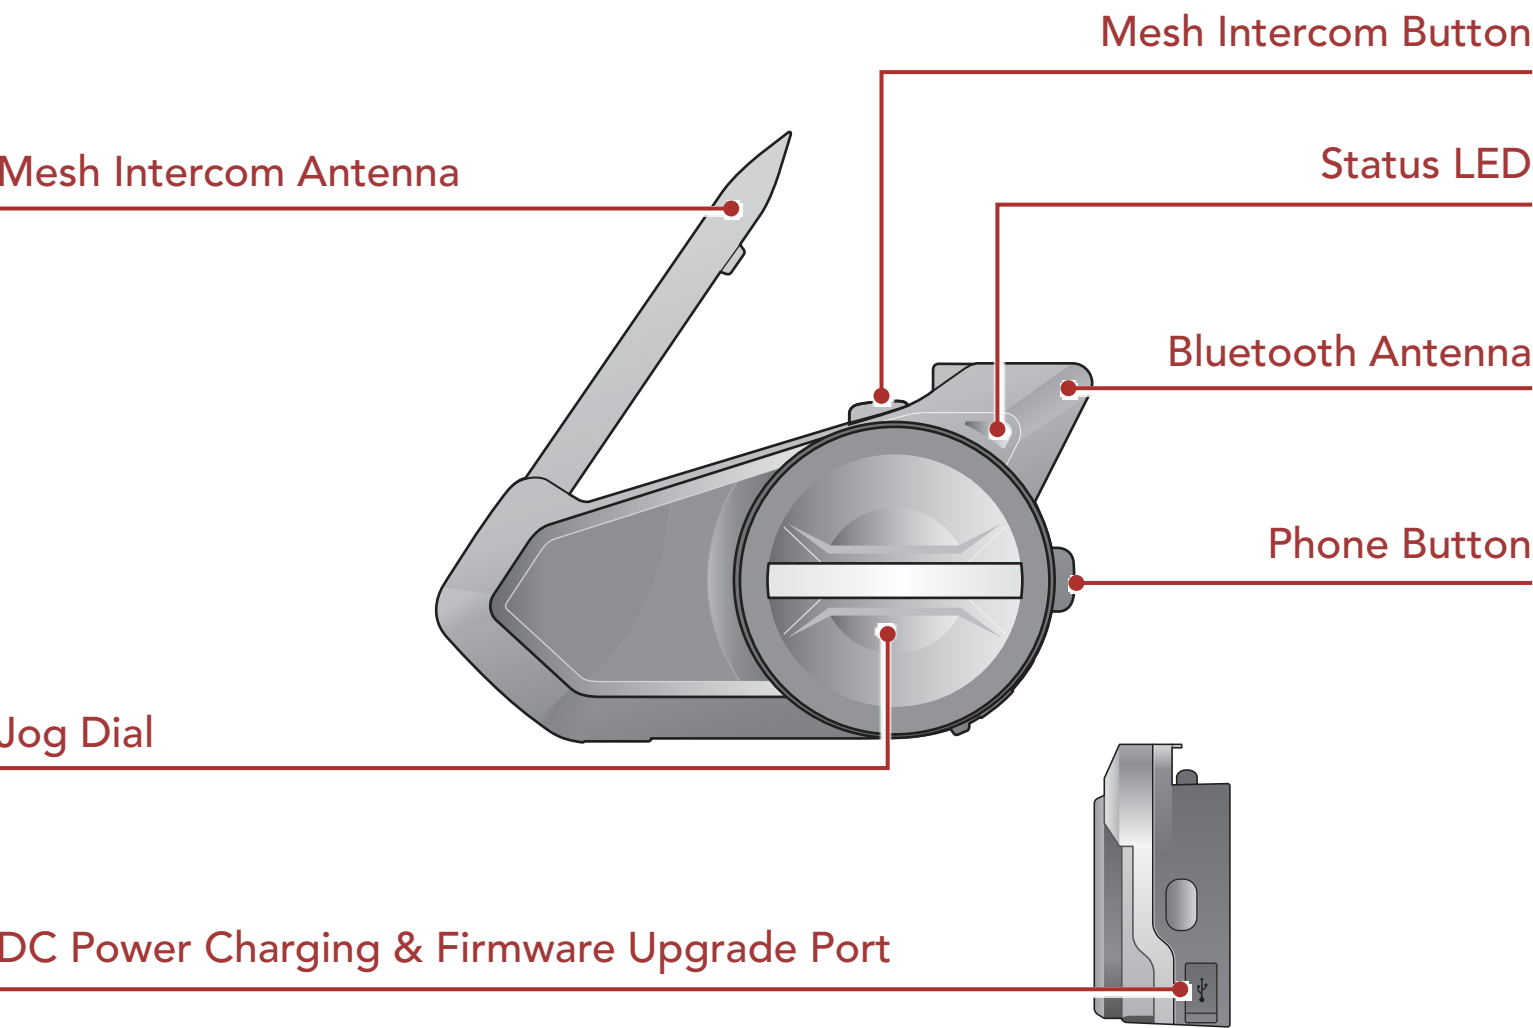


1.1.2 Universal Clamp Kit

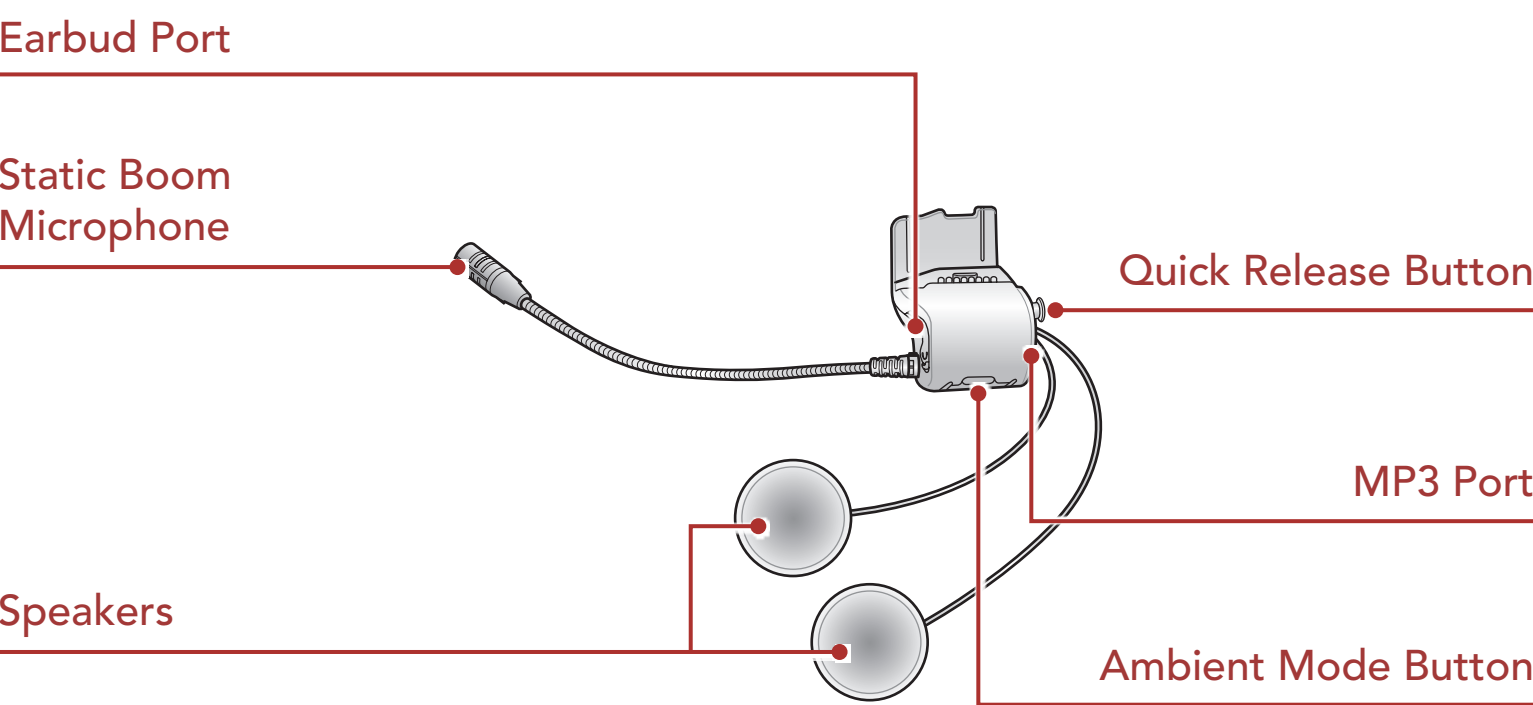

1.2 Package Contents



Headset
Main Unit




Universal
Helmet Clamp



Wired Boom
Microphone




Wired
Microphone




Hook and Loop
Fastener for
Boom Microphone




Hook and Loop
Fastener for
Wired Microphone




Microphone
Sponges




Glued Surface
Mounting
Adapter



Speaker Pads




Hook and Loop
Fasteners for
Speakers



Boom
Microphone
Holder



Hook and Loop
Fastener for
Holder




2.5 to 3.5 mm
Audio Cable




Rubber Pads



Allen Wrench



Speaker
Port Cover




WiFi Adapter

2. INSTALLING THE HEADSET ON YOUR HELMET


2.1 Helmet Installation

To securely install the headset on the helmet, please follow this procedure.


1. Insert the back plate of the clamp unit between the internal padding and the external shell of the helmet, and tighten the two screws.

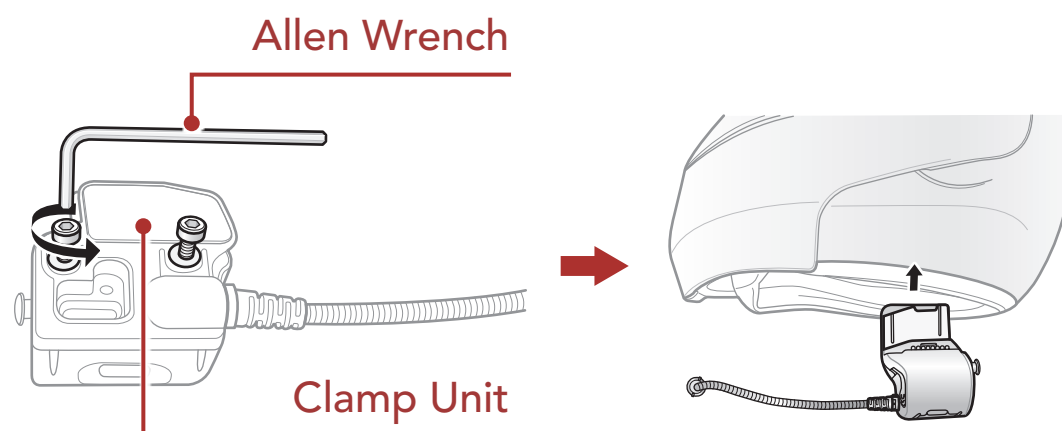


Note: Depending on the size and shape of your helmet, you may need to change the thickness of the rubber pad between the clamp plates using the two extra rubber pads in the box. To increase the overall thickness, attach the thinner one to the original rubber pad or replace the original rubber pad with the thicker one.

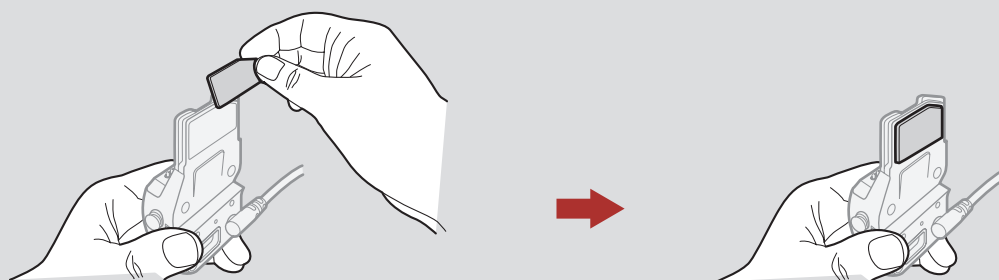


2. Place the helmet speakers along with the hook and loop fasteners, centered to your ear, in the ear pockets of the helmet. If the helmet has deep ear pockets, you can use the speaker pads to place the speakers closer to your ears.

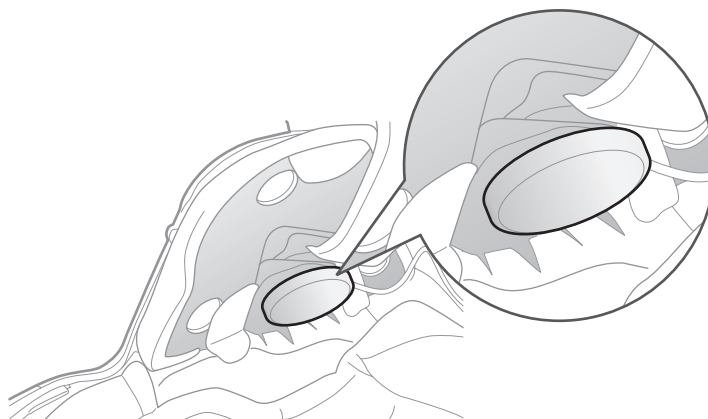


Note: Make sure that the microphone is located properly close to your mouth when you wear the helmet.



3. Attach the headset main unit to the clamp unit. Slide the main unit down onto the clamp unit until it clicks firmly into the bottom portion of the clamp unit.

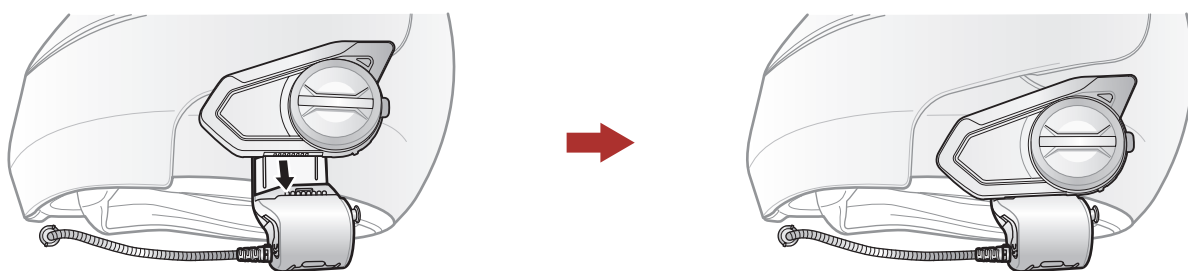


4. To remove the main unit from the clamp unit, press the Quick Release Button to slide it off the clamp unit.

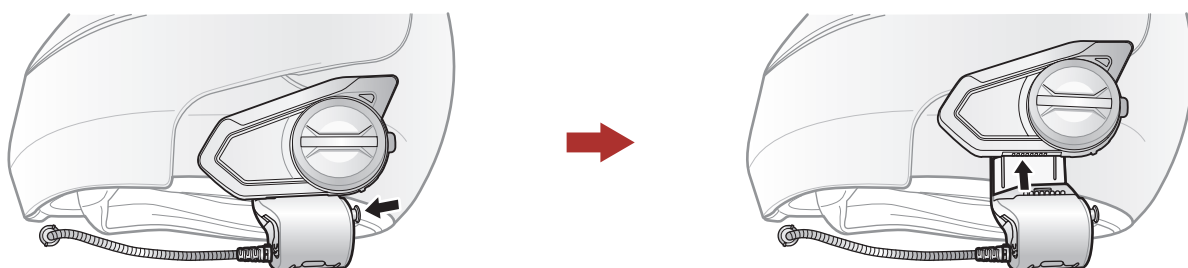


2.2 Using the Glued Surface Mounting Adapter

If you have any problem equipping the clamp unit on the helmet for any reason, you may use the glued surface mounting adapter to attach the clamp unit on the external surface of the helmet.


1. Remove the speaker unit.

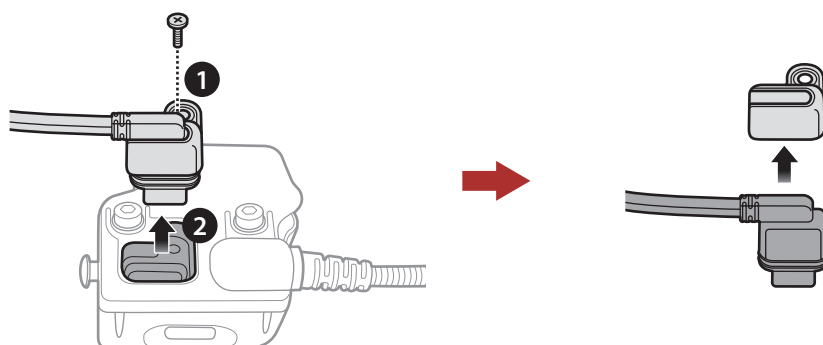


2. Remove the back plate.

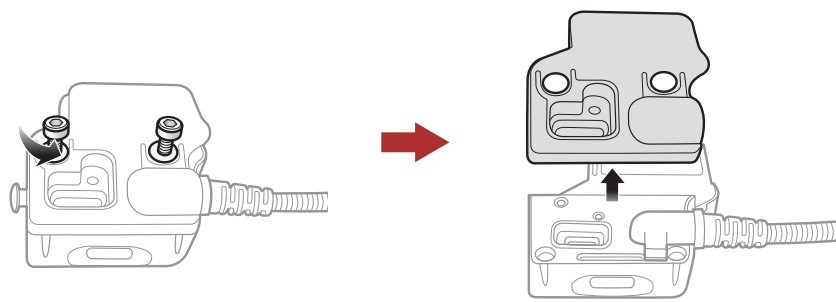


3. Remove the rubber pad and replace it with the thicker rubber pad included in the package.

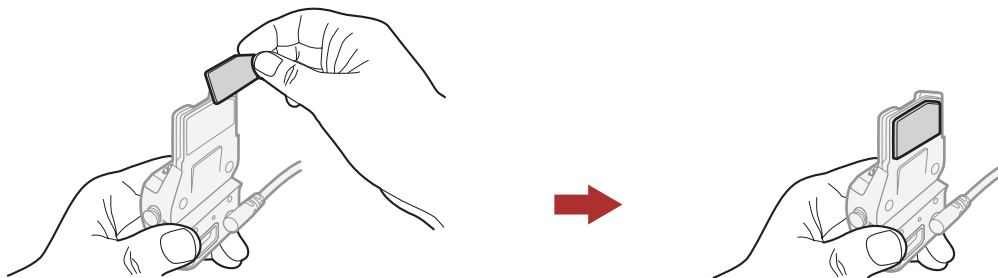

4. Hook on the adapter to the clamp unit then screw in the glued external adapter to the clamp unit.
5. Reconnect the speaker cable to the speaker port.

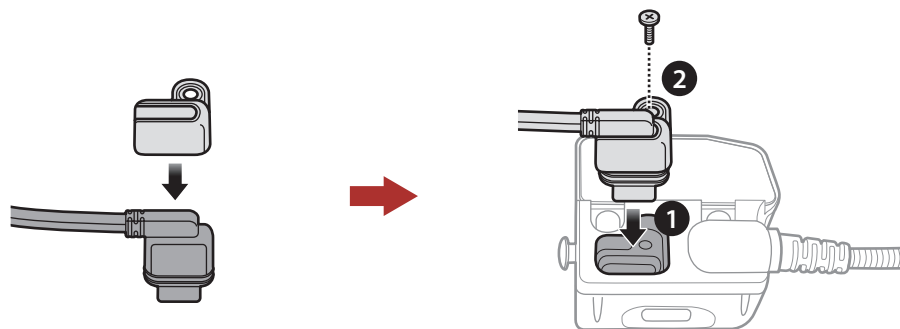

6. Locate a proper surface on the helmet to attach the unit then clean the helmet surface location with a moistened towel and allow to dry thoroughly.
7. Peel off the cover of the adhesive tape of the adapter and attach the unit on the proper surface of your helmet.

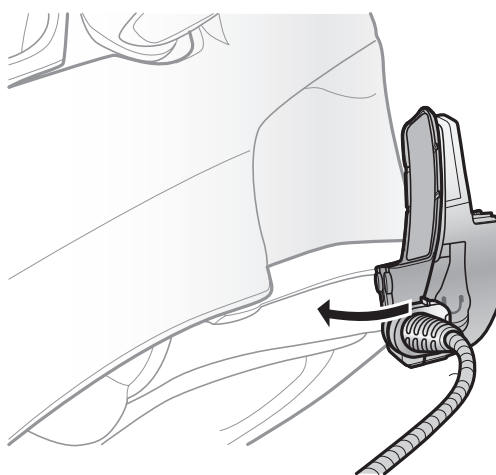


⚠ Caution: Harley-Davidson recommends using the clamp unit. The glued surface mounting plate is provided for convenience, but is not the recommended mounting method. Harley-Davidson is not responsible for its use.

2.3 Switching the Microphone


If you want to use a different microphone instead of the static boom microphone, please refer to the following steps.

1. Remove the back plate of the clamp unit.
2. Connect the microphone according to your helmet type.
3. Lock the microphone to the clamp.
4. Reattach the back plate to cover the microphone and the speaker port.

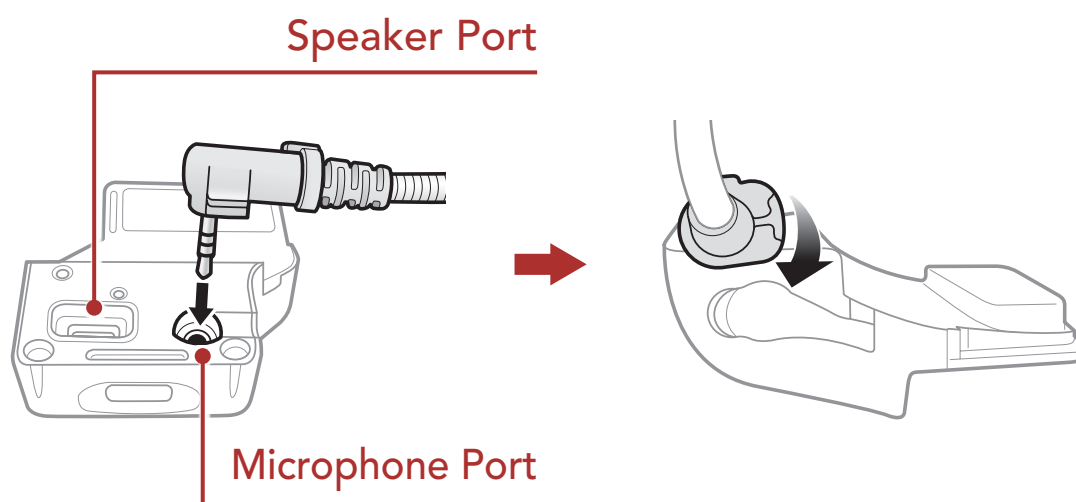


2.3.1 Wired Boom Microphone

When installing the included wired boom microphone, place the hook and loop fastener at the end of the boom microphone between the internal helmet cheek pad and the internal wall of the helmet shell. The boom microphone should be mounted so it is facing close to your mouth when you wear the helmet.

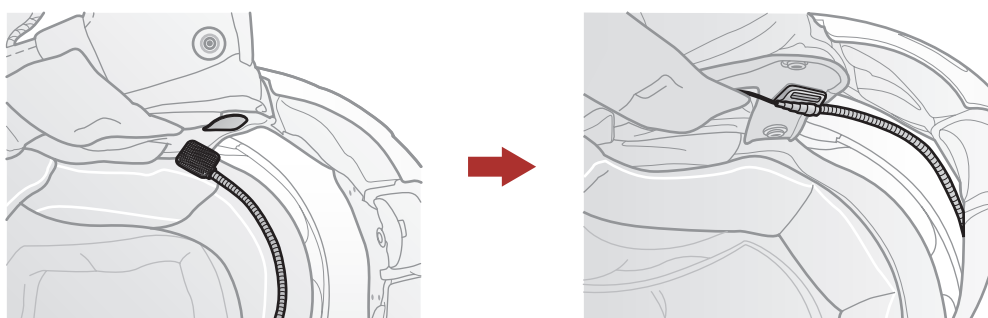


2.3.2 Wired Microphone

In case of the wired microphone, attach the enclosed hook and loop fastener for the wired microphone to the inside of the chin guard for full-face helmets. Place the wired microphone on the hook and loop fastener and connect it to the connector of the clamp unit.

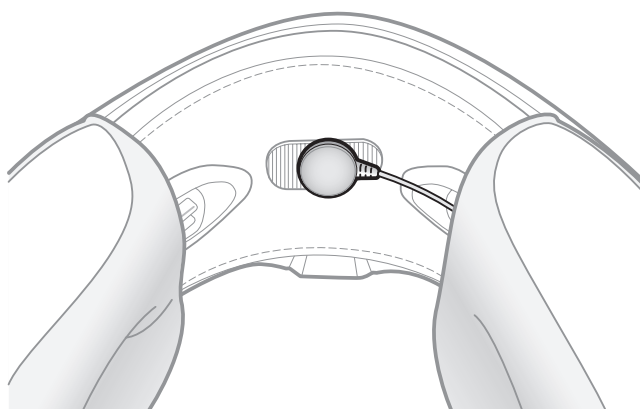


2.4 Earbuds

You can connect your earbuds to the clamp while having the speakers connected to the clamp. The sound of the earbuds will be active while the sound of the outer speakers becomes inactive.

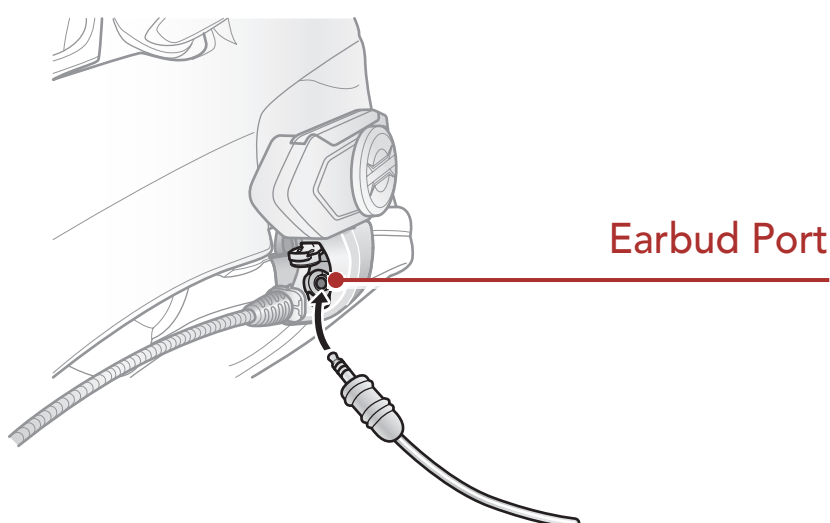


2.5 External Mesh Intercom Antenna

Pull the **Mesh Intercom** Antenna outwards slightly to unfold it.

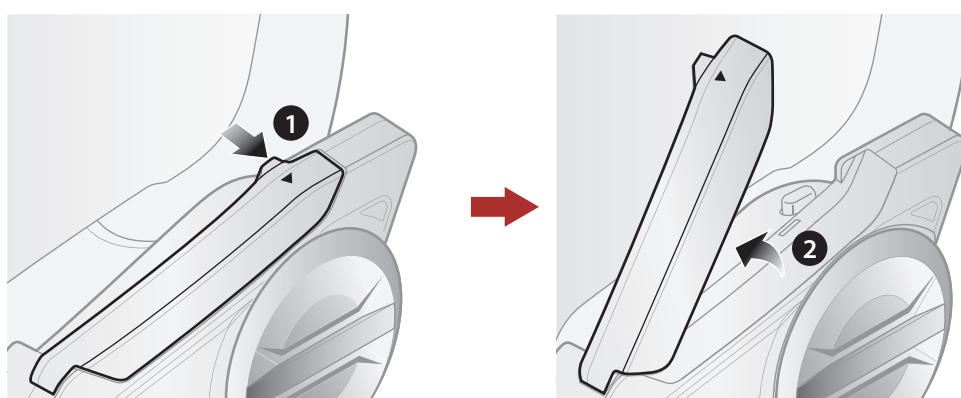

3. GETTING STARTED

3.1 Button

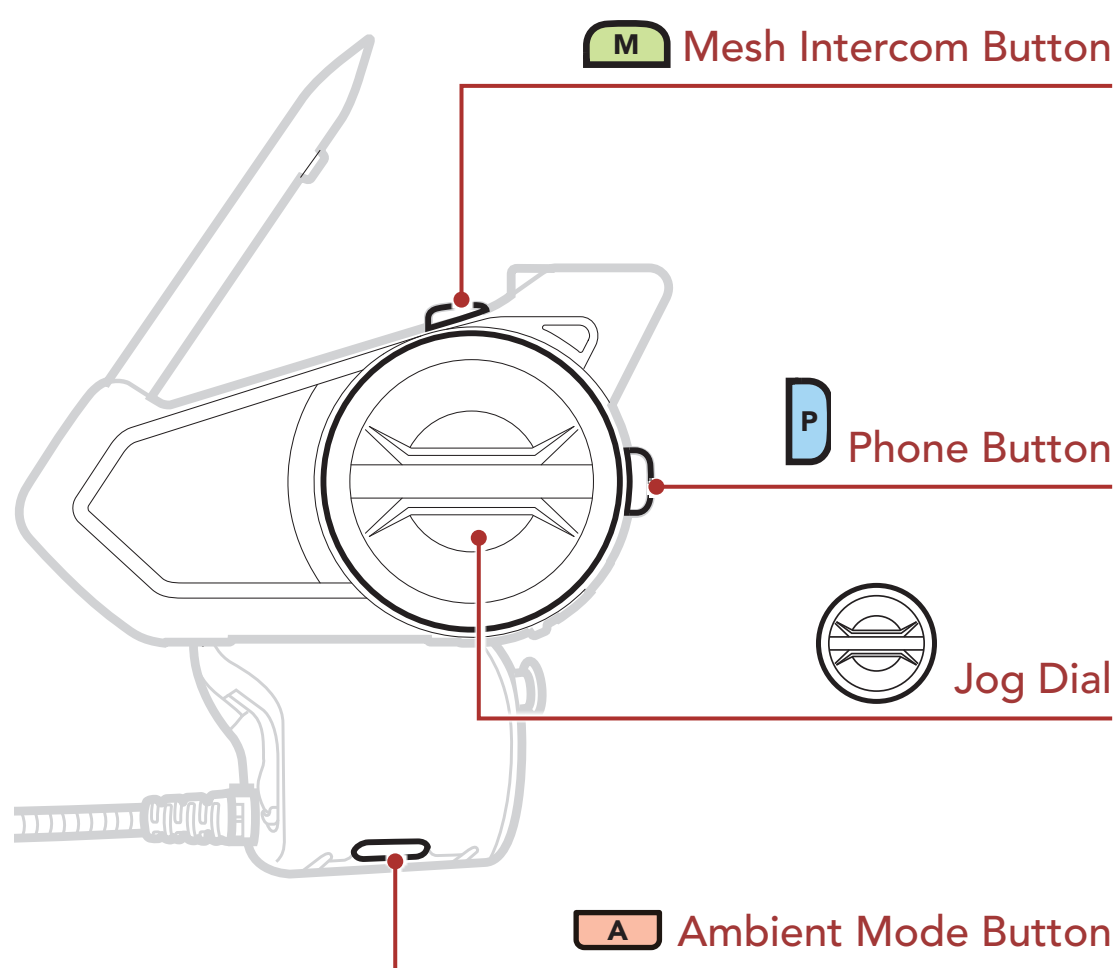

3.2 Downloadable Software

3.2.1 SENA MOTORCYCLES App

By simply pairing your phone with your headset, you can use the **SENA MOTORCYCLES App** for quicker, easier set up and management.



SENA MOTORCYCLES

- Device configuration setting

- Download the **SENA MOTORCYCLES App** on **Google Play Store** or **App Store**.

3.2.2 Boom Audio Bluetooth Device Manager

The **Boom Audio Bluetooth Device Manager** allows you to upgrade firmware and configure settings directly from your PC.



- Download the **Boom Audio Bluetooth Device Manager** at oem.sena.com/harley-davidson.

3.3 Powering On and Off

Press and hold the **Jog Dial** and **Phone Button** at the same time to turn the headset on or off.

Powering On




Powering Off



3.4 Charging

Charging the Headset

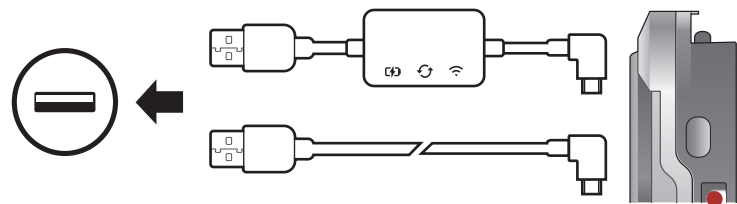

DC Power Charging & Firmware Upgrade Port

You can charge the headset by connecting the **WiFi Adapter** or a **USB Power & Data Cable (USB-C)**. A **USB Power & Data Cable (USB-C)** is not included in the package.

The headset will be fully charged in about 1 hour. (The charging time may vary depending on the charging method.)


Note:

- The headset includes a **Fast Charging** feature which allows it to charge quickly over a short period of time. For example, a user can get up to 3.5 hours of Mesh communication or 6 hours of Bluetooth intercom after charging the headset for 20 minutes.
- Any 3rd party USB charger can be used with Harley-Davidson products if the charger is approved by either the FCC, CE, or IC.
- The **Harley-Davidson Audio 50S** is compatible with 5 V input USB-charged devices only.

3.5 Checking the Battery Level

Instructions are for when powering the headset on.

Visual Method

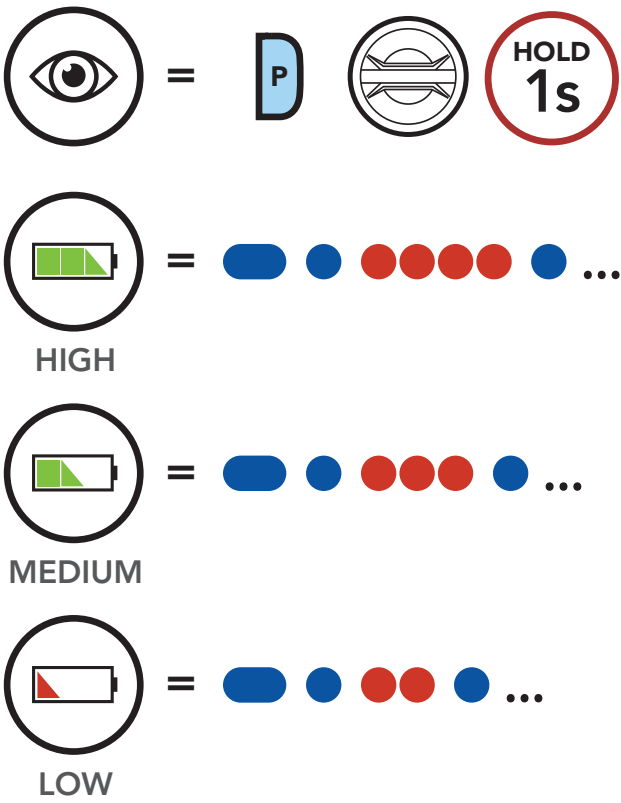


Note: When the battery is low while in use, you will hear a voice prompt saying **“Low battery”**.

3.6 Volume Adjustment

You can raise or lower the volume by rotating the **Jog Dial** clockwise or counterclockwise. Volume is set and maintained independently at different levels for each audio source (i.e., phone, intercom), even when the headset is rebooted.

Volume Up

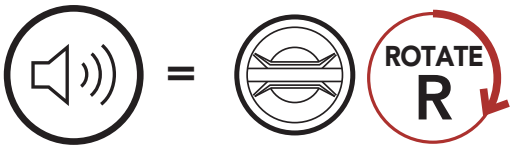

Volume Down




4. PAIRING THE HEADSET WITH OTHER BLUETOOTH DEVICES


When using the headset with other Bluetooth devices for the first time, they will need to be “paired.” This enables them to recognize and communicate with one another whenever they are within range.

The headset can pair with multiple Bluetooth devices such as a mobile phone, GPS, MP3 player or Sena SR10 Two-Way Radio Adapter via **Mobile Phone Pairing, Second Mobile Phone Pairing and GPS Pairing**. The headset can also be paired with up to three other Harley-Davidson headsets.

Pairs with up to Three Harley-Davidson Headsets

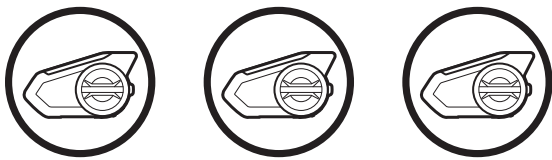

Also Pairs with:

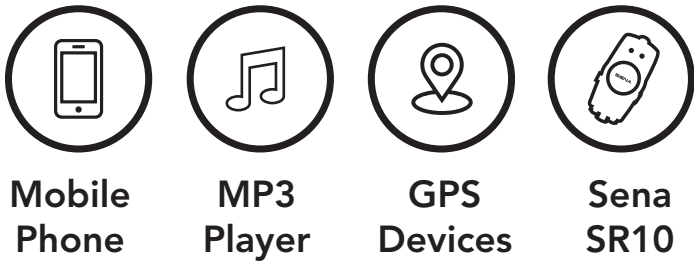

4.1 Phone Pairing

There are two ways to pair the phone.


4.1.1 Pairing When the Harley-Davidson Audio 50S is Turned Off

1. Press and hold the **Phone Button** and **Jog Dial** for **3 seconds** when the **Harley-Davidson Audio 50S** is turned off.

Phone Pairing





- 2. With your mobile phone in Bluetooth-pairing mode, select **H-D Audio 50S** in the list of devices detected.
- 3. If your mobile phone asks for a PIN, enter 0000.

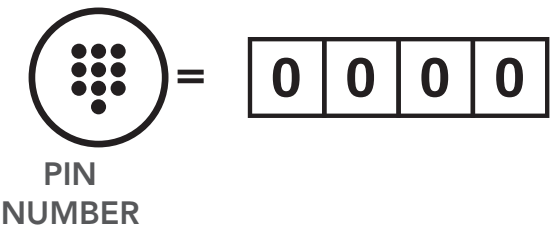


4.1.2 Pairing When the Harley-Davidson Audio 50S is Turned On

- 1. Press and hold the **Phone Button** for **5 seconds** when the **Harley-Davidson Audio 50S** is on.

Phone Pairing

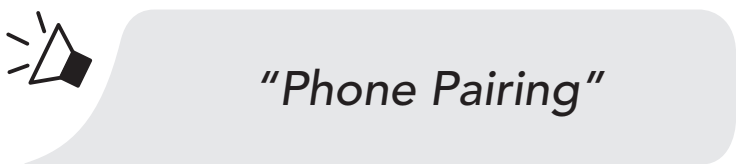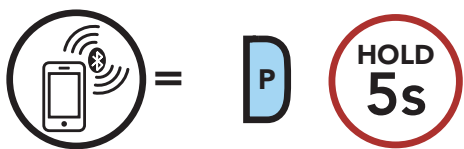

- 2. With your mobile phone in Bluetooth-pairing mode, select **H-D Audio 50S** in the list of devices detected.
- 3. If your mobile phone asks for a PIN, enter 0000.

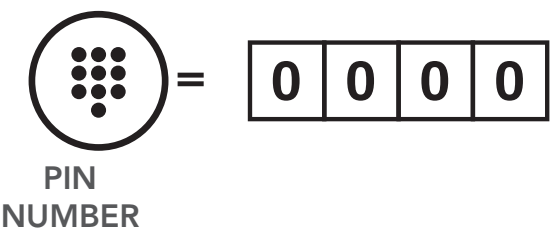


4.2 Pairing with the H-D WHIM Wireless Headset Interface Module

The H-D WHIM built-in Boom! Box is a Wireless Headset Interface for group communication. You can pair the headset with an H-D WHIM built-in Boom! Box by mobile phone pairing.

1. Press and hold the **Phone Button** for **5 seconds** and you will hear a voice prompt, **"Phone pairing"**.
2. Turn on the Boom! Box system and follow the **"Wireless Headset Setup"** procedure to complete the process. Please refer to the Boom! Box Owner's Manual for details.
3. When the pairing is completed, you will hear a voice prompt, **"Your headset is paired"**.
4. If the pairing process is not completed within three minutes, the headset will return to stand-by mode.

The H-D WHIM built-in Boom! Box can be connected to the rider and the passenger's headset. Also, the H-D WHIM built-in Boom! Box can be connected to the rider's mobile phone. The rider's headset should be paired first followed by the passenger's. Please refer to the Boom! Box Owner's Manual for details. You can listen to music, answer a mobile call, and have an intercom conversation via the H-D WHIM built-in Boom! Box for group communication as shown in the figure.



Parallel Connection of H-D WHIM built-in Boom! Box and Mobile Phone by Mobile Phone Pairing

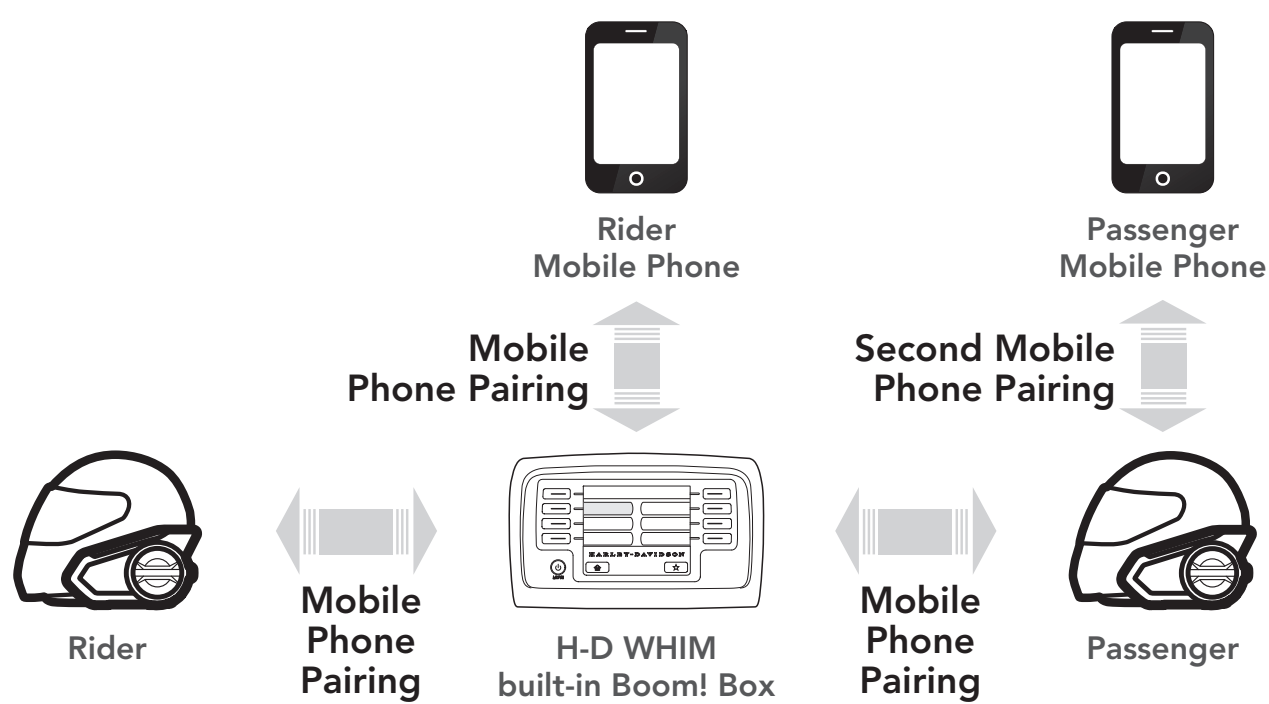


4.3 Second Mobile Phone Pairing - Second Mobile Phone, GPS, and SR10

1. Execute **Second Mobile Phone Pairing**.

Second Mobile Phone Pairing

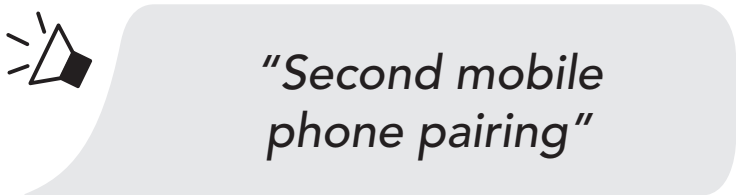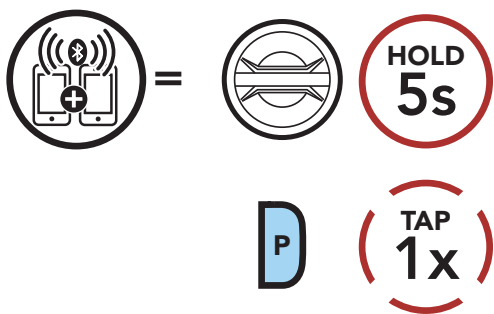

2. With your mobile phone in Bluetooth-pairing mode, select **H-D Audio 50S** in the list of devices detected.
3. If your mobile phone asks for a PIN, enter 0000.

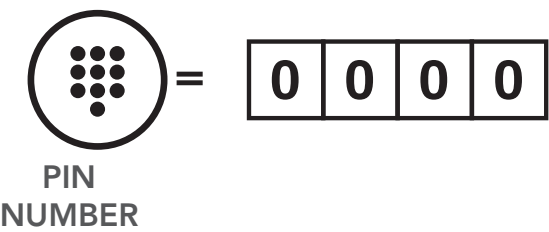



4.4 Advanced Selective Pairing: Hands-Free or A2DP Stereo

Phone Pairing allows the headset to establish two Bluetooth profiles: **Hands-Free** or **A2DP Stereo**. **Advanced Selective Pairing** allows the headset to separate the profiles to enable connection with two devices.

4.4.1 Phone Selective Pairing - Hands-Free Profile


1. Execute **Phone Selective Pairing**.

Phone Selective Pairing

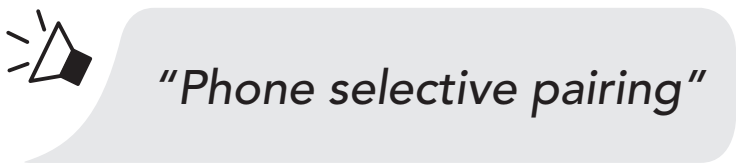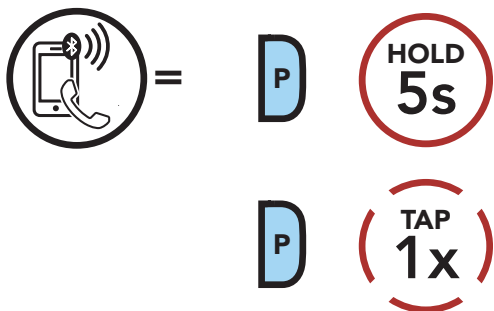

2. With your mobile phone in Bluetooth-pairing mode, select **H-D Audio 50S** in the list of devices detected.



3. If your mobile phone asks for a PIN, enter 0000.

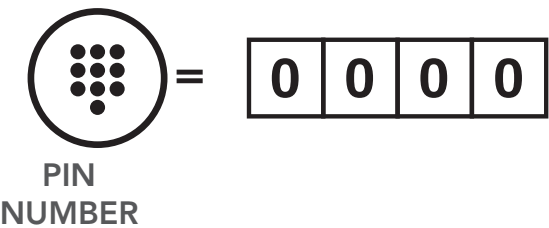


4.4.2 Media Selective Pairing - A2DP Profile

1. Execute **Media Selective Pairing**.

Media Selective Pairing

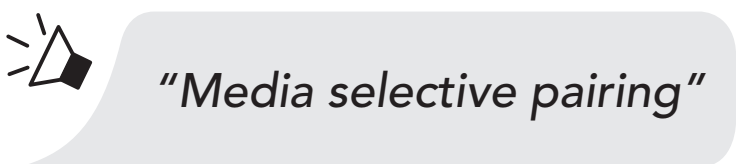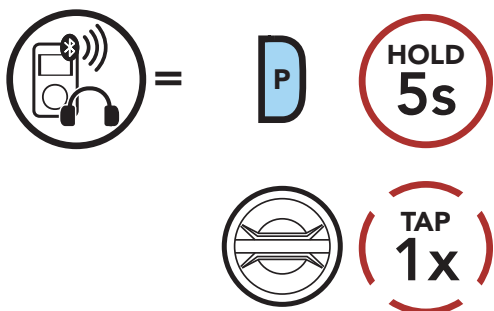


- 2. With your mobile phone in Bluetooth-pairing mode, select **H-D Audio 50S** in the list of devices detected.
- 3. If your mobile phone asks for a PIN, enter 0000.

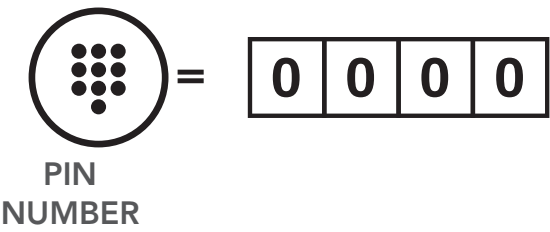

4.5 GPS Pairing

- 1. Execute **GPS Pairing**.

GPS Pairing

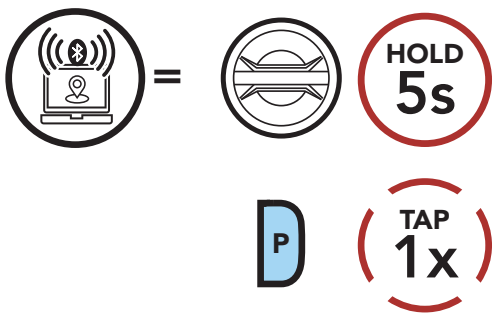



"Second mobile phone pairing"






"GPS pairing"



- 2. With your Bluetooth device on the GPS navigation screen, select **H-D Audio 50S** in the list of devices detected.
- 3. If your Bluetooth device asks for a PIN, enter 0000.

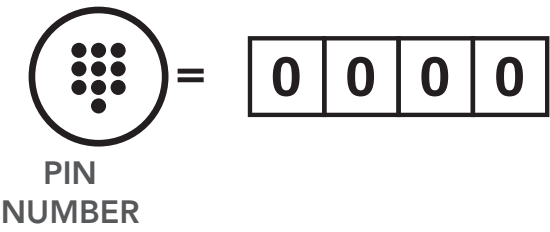


Note: If you pair your GPS device via GPS Pairing, its instruction will not interrupt your Mesh Intercom conversations, but overlay with them. Bluetooth intercom conversations will be interrupted by GPS instructions.


5. MOBILE PHONE USAGE

5.1 Making and Answering Calls


Answer a Call



End a Call

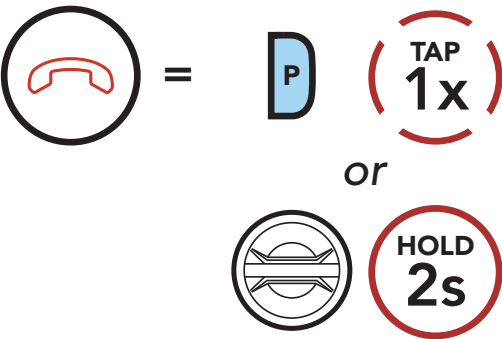

Reject a Call

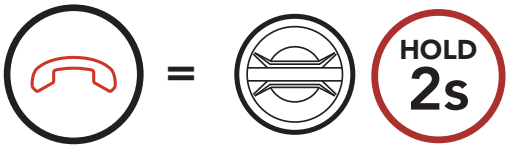

Note: If you have a GPS device connected, you will not hear its voice navigations during a phone call.

5.2 Siri and Google Assistant

The **Harley-Davidson Audio 50S** supports the **Siri** and **Google Assistant** access directly.

You can activate the **Siri** or **Google Assistant** using the voice through the headset’s microphone, a wake word will be used. This is a word or groups of words such as **“Hey Siri”** or **“Hey Google”**.

Activate the Siri or Google Assistant Installed on Your Smartphone



5.3 Speed Dialing



5.3.1 Assigning Speed Dial Presets

Speed Dial Presets could be assigned in the settings menu, accessible through **Boom Audio Bluetooth Device Manager** or **SENA MOTORCYCLES App**.

5.3.2 Using Speed Dial Presets


1. Enter into the **Speed Dial** menu.

Enter Speed Dial Mode

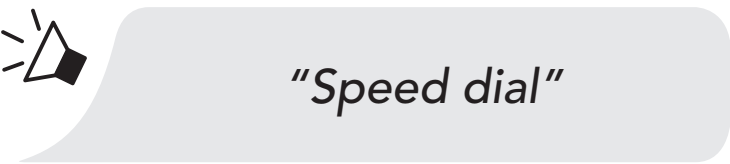



2. Navigate between the **Speed Dial Preset**.

Navigate Forward or Backward through Speed Dial Preset Numbers

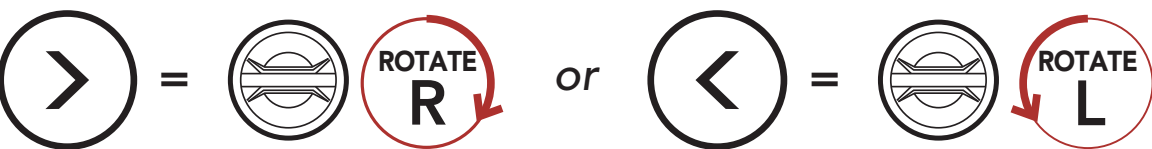



3. Call one of your **Speed Dial Presets**.

Call a Speed Dial Preset Number

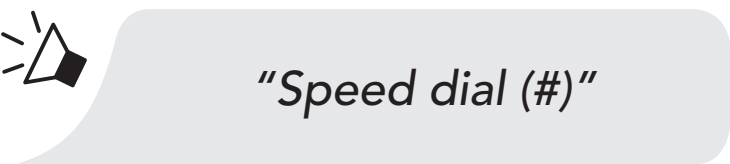

4. Redial the last number called.

Redial Last Number

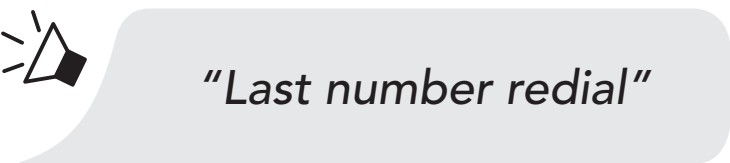


6. STEREO MUSIC

6.1 Playing Music with Bluetooth Devices


1. Play or pause music.

Play/Pause Music




2. Adjust the volume.

Volume Up/Down

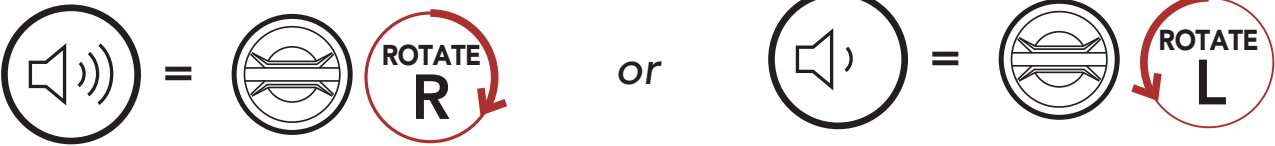


3. Track forward or back.

Track Forward/Backward

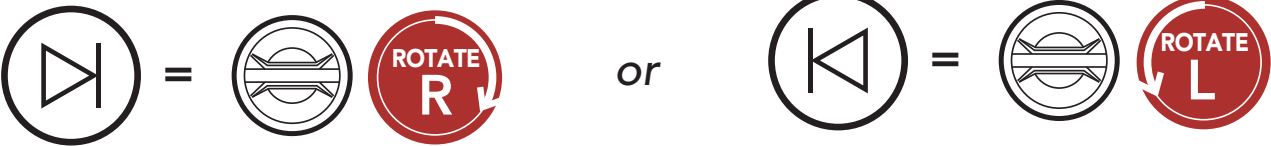

6.2 Playing Music with non-Bluetooth Devices

You can play music that is stored on non-Bluetooth devices such as MP3 players. To connect your device to the headset, plug the enclosed 2.5 to 3.5 mm audio cable into the AUX ports, both on the headset and on your device.

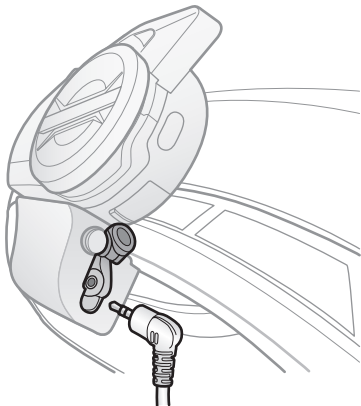

To adjust the volume, rotate the **Jog Dial** clockwise or counterclockwise. You can also adjust the volume directly on the connected device.

6.3 Music Sharing

You can start sharing music with one intercom friend using Bluetooth stereo music during a two-way intercom conversation and one participant of a Mesh. Both you and your intercom friend can remotely control music playback such as track forward and track back. If you start sharing music while Bluetooth intercom and Mesh Intercom are running at the same time, then music shared during Bluetooth intercom will take priority over music shared during Mesh Intercom. The Creator will send a request message to a headset connected during Mesh Intercom and will share music with the first participant that accepts the request.

Bluetooth Intercom Music Sharing

 =  

 *"Music sharing on"*

Mesh Intercom Music Sharing [Creator]

 =  

 *"Music sharing on"*

[Participant]

 *"Would you like to accept music sharing?"*

 =  

 =  


7. MESH INTERCOM

7.1 What is Mesh Intercom?

Mesh Intercom™ is a dynamic communication system created by Harley-Davidson that provides instant and effortless bike-to-bike communication without a pre-grouping process. **Mesh Intercom** allows riders to connect and communicate with nearby users without the need to pair each headset together.


The working distance between each **Harley-Davidson Audio 50S** in **Mesh Intercom** can be up to 2 km (1.2 miles) in open terrain. In open terrain, the **Mesh** can be extended up to 8 km (5 miles) between a minimum of six users. Within the same channel in **Open Mesh™** or the same private group in **Group Mesh™**, six users can talk at the same time and enjoy the optimal quality for their conversation.

Mesh Intercom

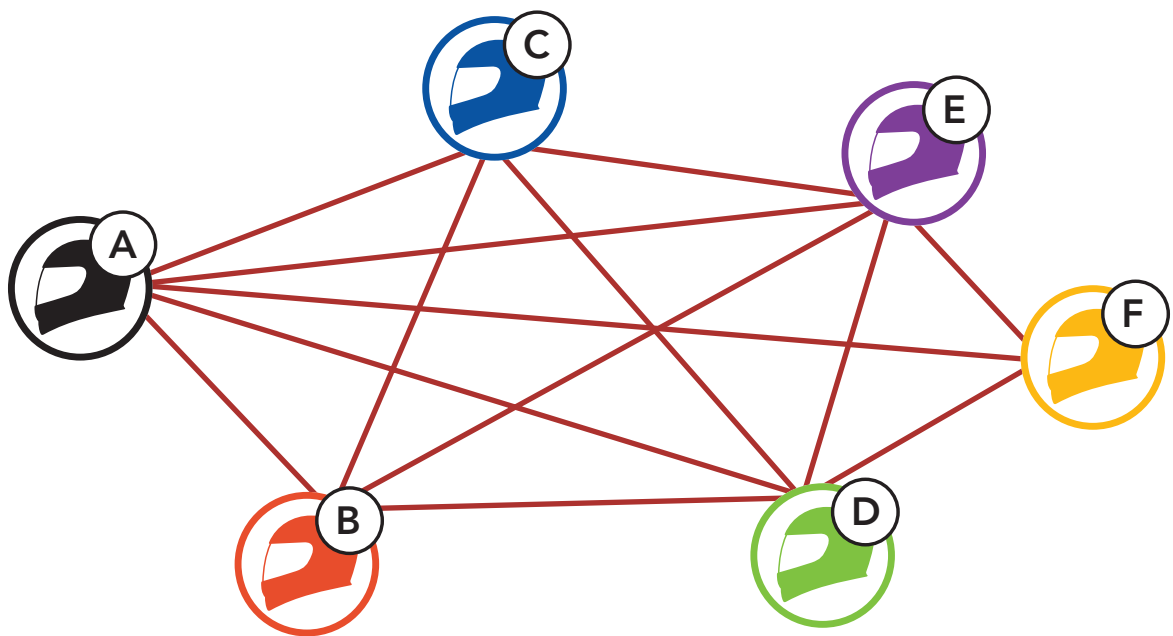

7.1.1 Open Mesh


Open Mesh is an open group intercom function. Users can freely communicate with each other in the same **Open Mesh** channel and select which channel (1-9) to use through the headset. It can connect with a virtually unlimited number of users in each channel.

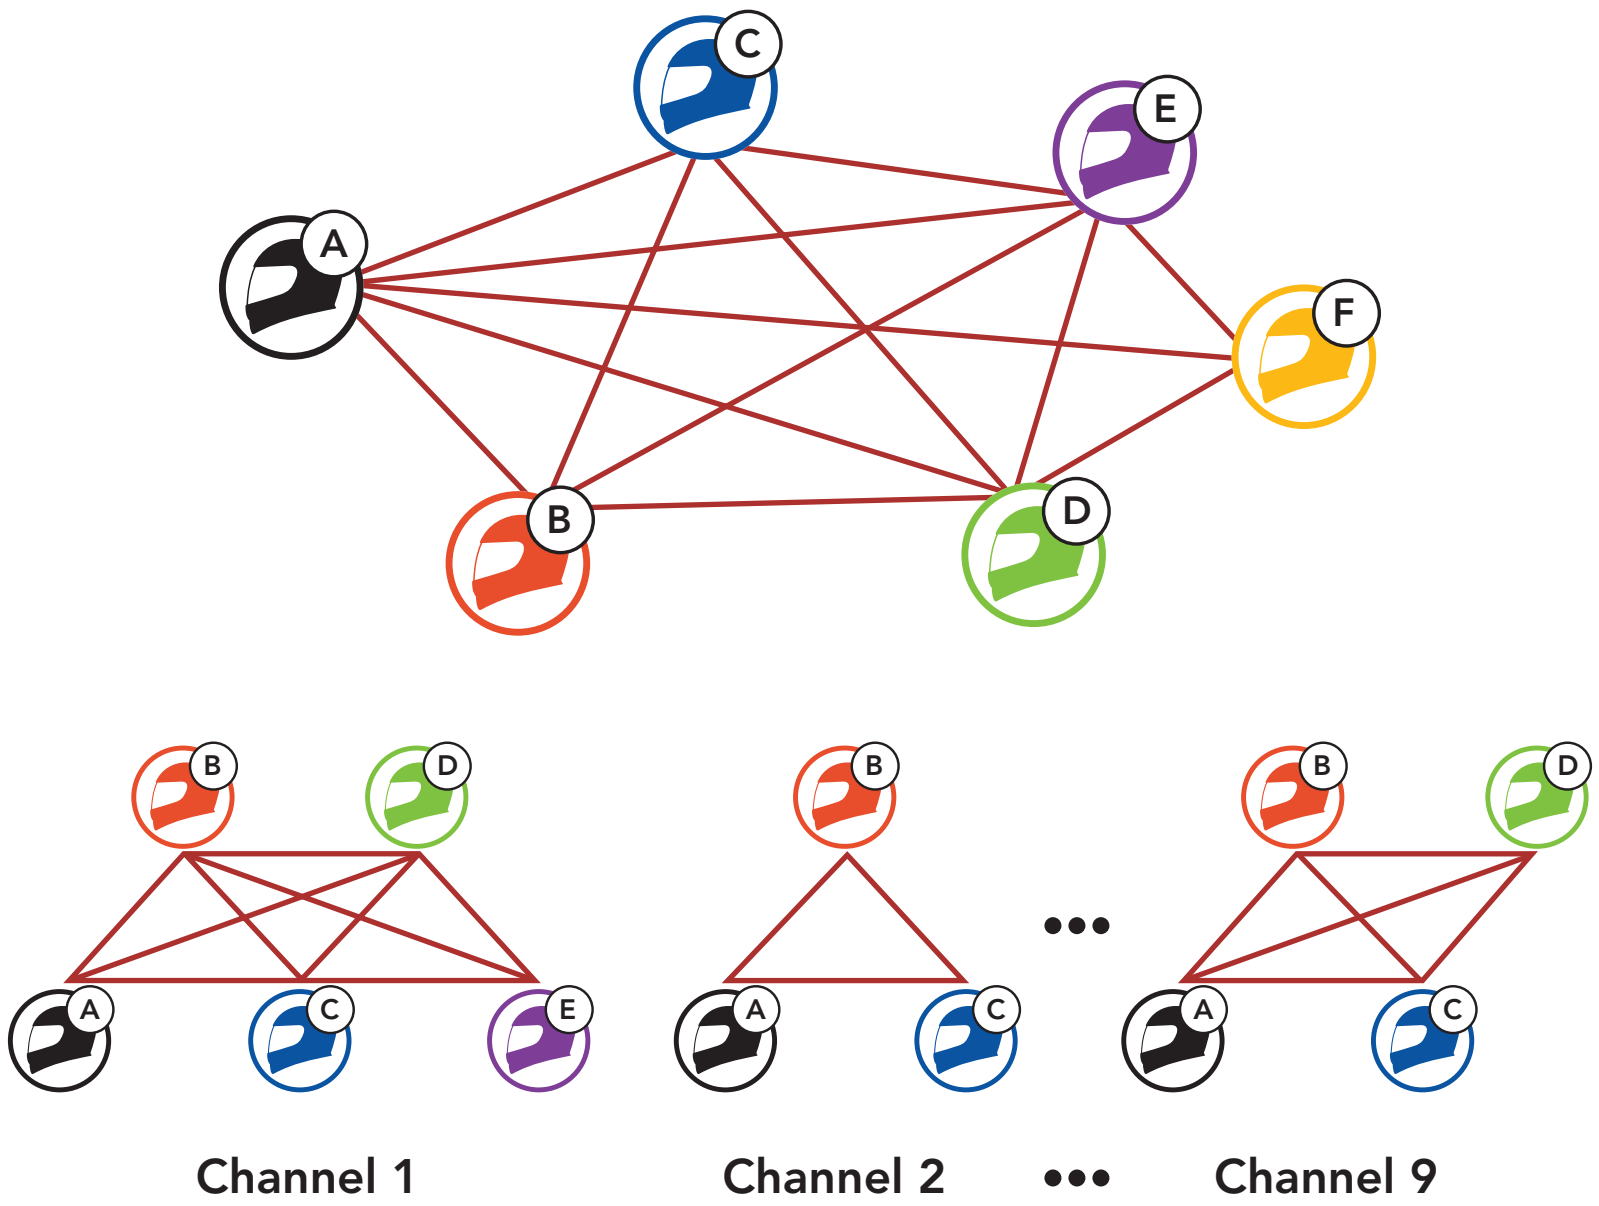

7.1.2 Group Mesh

Group Mesh is a closed group intercom function that allows users to join, leave, or rejoin a group intercom conversation without pairing each headset. Users can freely communicate with each other in the same private group in **Group Mesh**.

For closed intercom conversations using **Mesh Intercom**, a **Group Mesh** needs to be created by the users. When users create a private group in **Group Mesh** by **Mesh Grouping**, the headset automatically switches from **Open Mesh** to **Group Mesh**. Up to 24 users can all be connected in each private group.

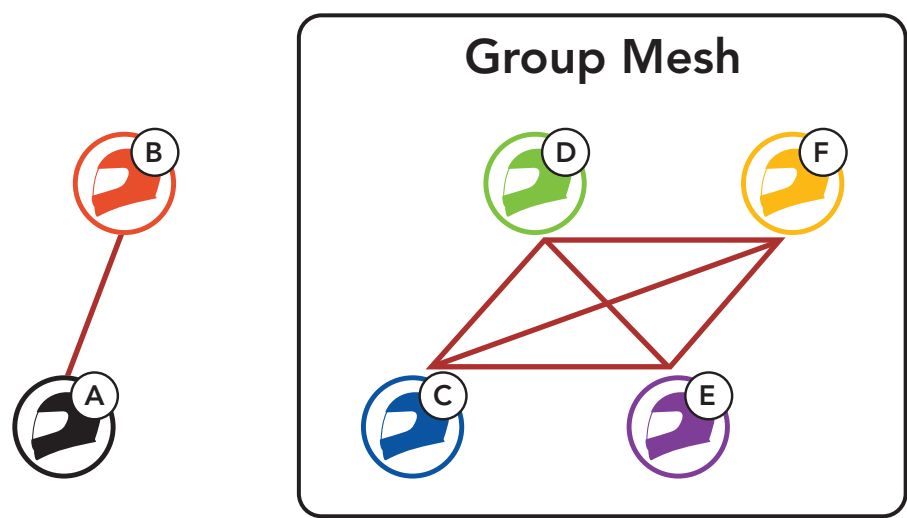

7.2 Starting Mesh Intercom

When **Mesh Intercom** is enabled, the **Harley-Davidson Audio 50S** will automatically connect to nearby **Harley-Davidson Audio 50S** users and allow them to talk to each other by pressing the **Mesh Intercom Button**.

Mesh Intercom On

 =  

 "Mesh intercom on"

Mesh Intercom Off

 =  


 "Mesh intercom off"

7.3 Using the Mesh in Open Mesh

When **Mesh Intercom** is enabled, the headset will be in **Open Mesh (default: channel 1)** initially.

7.3.1 Channel Setting (Default: channel 1)

If the **Open Mesh** communication experiences interference because other groups are also using **channel 1 (default)**, change the channel. You can select from channels 1 to 9.

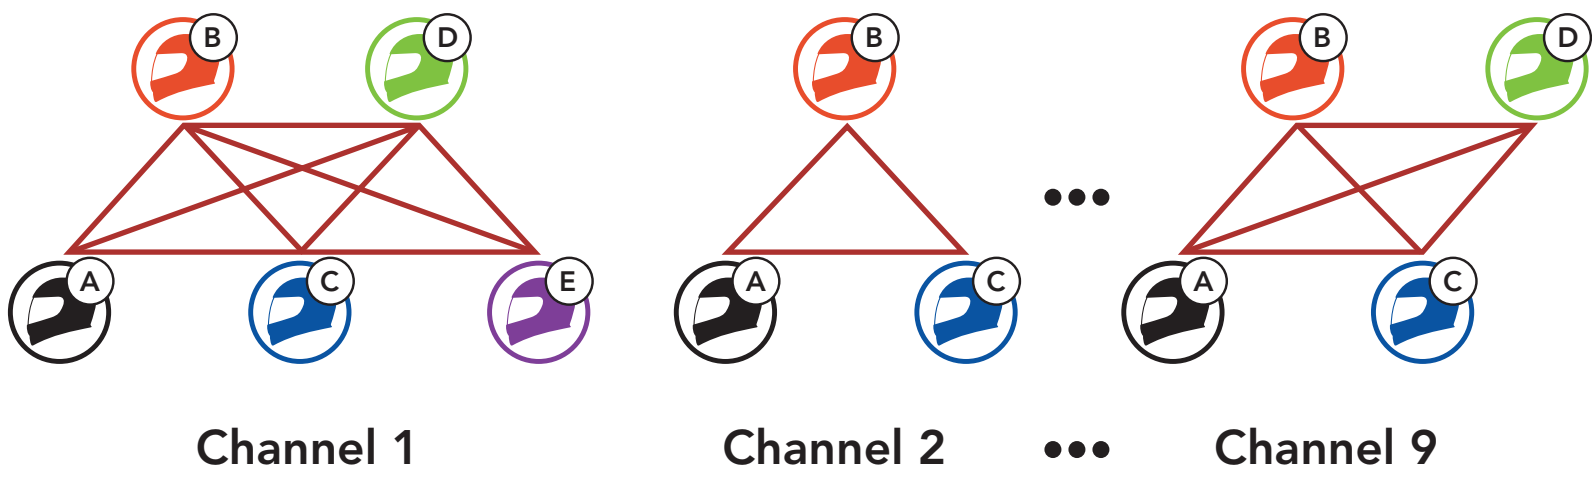

Enter into the Channel Setting

= (TAP 2x)

"Channel setting, 1"

Navigate Between Channels
(1 → 2 → ... → 8 → 9 → Exit → 1 → ...)

= ROTATE R or = ROTATE L

"#"

Save the Channel

= (TAP 1x)

"Channel is set, channel #"

Note:


- **Channel Setting** always starts with channel 1.
- If you do not press any button for approximately **10 seconds** in a specific channel, the channel is automatically saved.
- If you want to cancel during **Channel Setting**, tap the **Phone Button**.
- The channel will be remembered even if you turn off the **Harley-Davidson Audio 50S**.

7.4 Using Mesh in Group Mesh

7.4.1 Creating a Group Mesh

Creating a **Group Mesh** requires **two or more Open Mesh users**.

Open Mesh

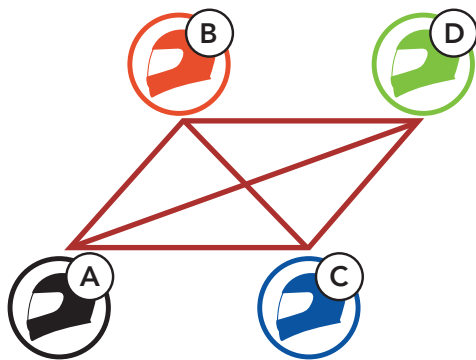

1. Enter into **Mesh Grouping** to create a **Group Mesh**.



YOU

and = 




FRIEND






"Mesh Grouping"


2. The headsets complete **Mesh Grouping** and automatically switch from **Open Mesh** to **Group Mesh**.

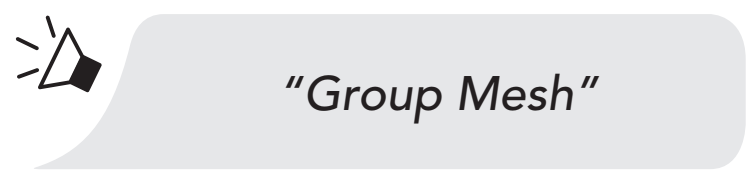

Open Mesh

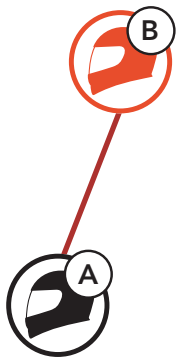

Group Mesh

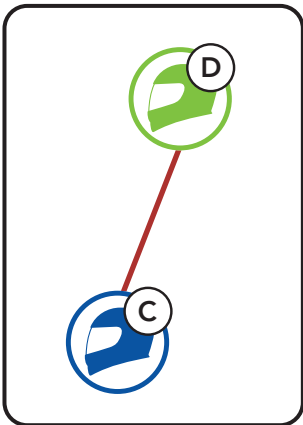


Note:

- If the **Mesh Grouping** is not completed within **30 seconds**, users will hear a voice prompt, **"Grouping failed"**.
- If you want to cancel during the **Mesh Grouping**, tap the **Mesh Intercom Button** or **Phone Button**.


7.4.2 Joining an Existing Group Mesh

One of the members in an **Existing Group Mesh** can allow new members in **Open Mesh** to join the **Existing Group Mesh**.

New Members

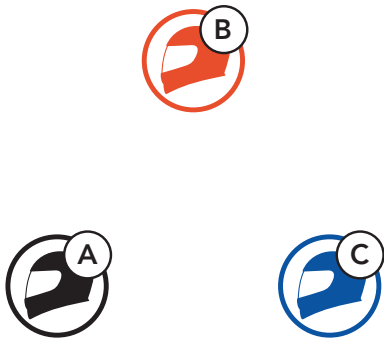

Existing Group Mesh and Current Members

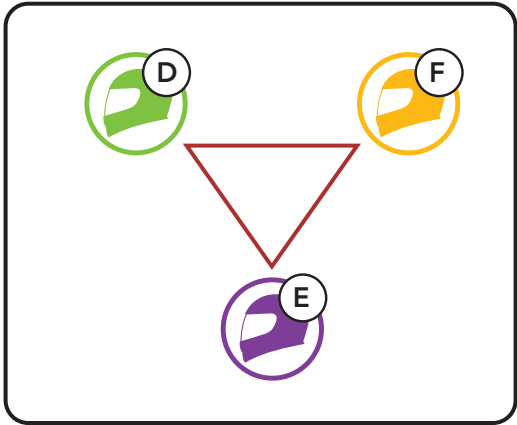

1. **One of the current members** and a **new member** enter into **Mesh Grouping** to join the **Existing Group Mesh**.



YOU
(NEW
MEMBER)

and

=



CURRENT
MEMBER
IN GROUP
MESH




"Mesh Grouping"

2. The headsets complete **Mesh Grouping**. The new members will hear a voice prompt as their headsets automatically switch from **Open Mesh** to **Group Mesh**.




"Group Mesh"

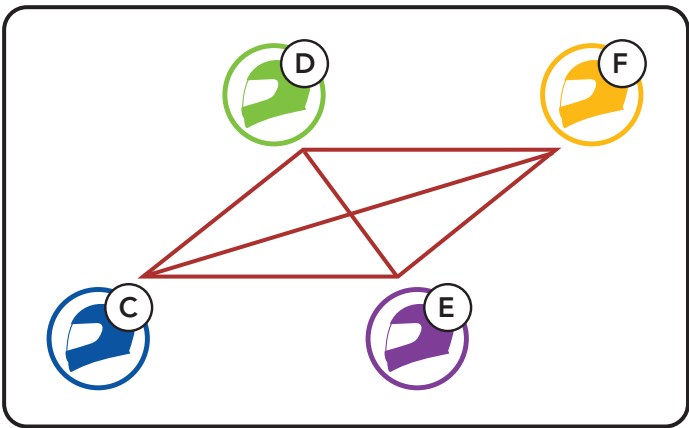

Note: If the **Mesh Grouping** is not completed within **30 seconds**, the current members will hear a low tone double beep and the new member will hear a voice prompt, **"Grouping failed"**.

7.5 Reset Mesh

If a headset in an **Open Mesh** or **Group Mesh** resets the **Mesh**, it will automatically return to **Open Mesh (default: channel 1)**.

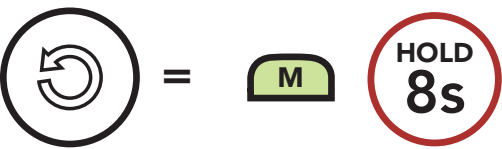


7.6 Toggling Open Mesh/Group Mesh

Users are able to toggle between **Open Mesh** and **Group Mesh** without resetting the **Mesh**. This allows users to keep the **Group Mesh Network** connection information while in **Open Mesh**.

Users can toggle to **Group Mesh** to communicate with participants from the stored **Group Mesh Network** connection information.

Toggle Between Open Mesh and Group Mesh

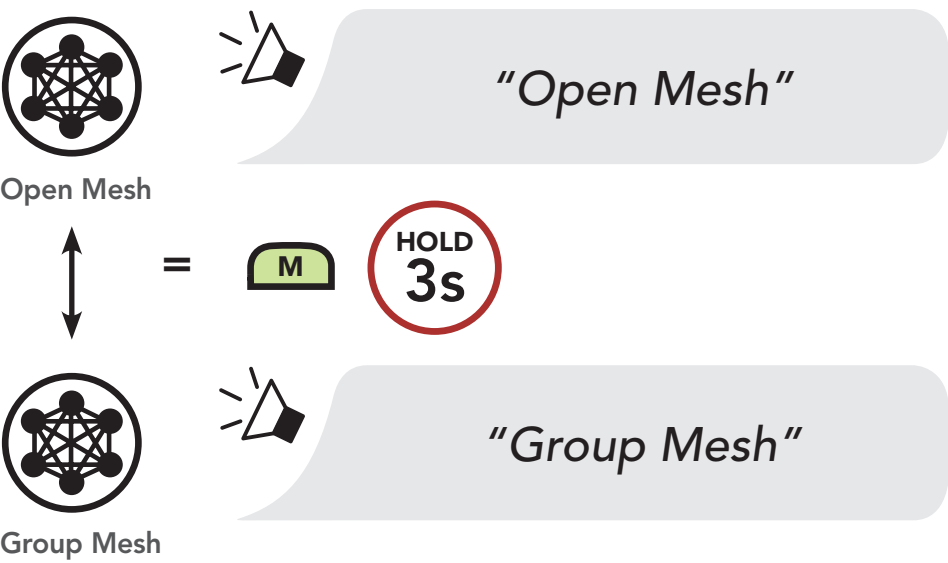


Note: If you have never participated in **Group Mesh**, you cannot toggle between **Open Mesh** and **Group Mesh**. You will hear a voice prompt, **"No Group Available"**.

7.7 Enable/Disable Mic (Default: Enable)

Users can enable/disable the microphone when communicating in a **Mesh Intercom**.


Enable/Disable the Microphone



8. BLUETOOTH INTERCOM

Up to three people can communicate via intercom with the headset simply by pairing their headsets.

Pairing with Intercom Friends

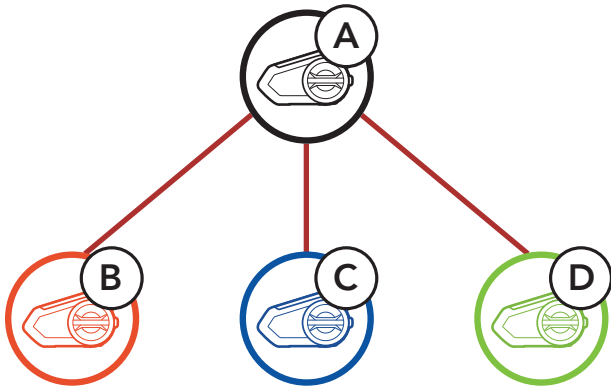

8.1 Intercom Pairing

There are two ways to pair the headset.

8.1.1 Using the Smart Intercom Pairing (SIP)

SIP allows you to quickly pair with your friends for intercom communication by scanning the QR code on the **SENA MOTORCYCLES App** without remembering the button operation.

1. Pair the mobile phone with the headset.
2. Open the **SENA MOTORCYCLES App** and tap  (**Smart Intercom Pairing Menu**).
3. Scan the **QR code** displayed on your friend **(B)**'s mobile phone.
 - Your friend **(B)** can display the QR code on the mobile phone by tapping  > **QR code** () on the **SENA MOTORCYCLES App**.




- 4. Tap **Save** and check that your friend **(B)** is paired with **you (A)** correctly.
- 5. Tap **Scan** (📷) and repeat steps 3-4 to pair with **Intercom Friends (C)** and **(D)**.

Note: The **Smart Intercom Pairing (SIP)** is not compatible with Harley-Davidson products that use **Bluetooth 3.0** or **below**.

8.1.2 Using the Button


- 1. Press and hold the **Jog Dials** of two headsets for **5 seconds** until you hear a voice prompt, **"Intercom pairing"**.

Pairing Headset A with Headset B

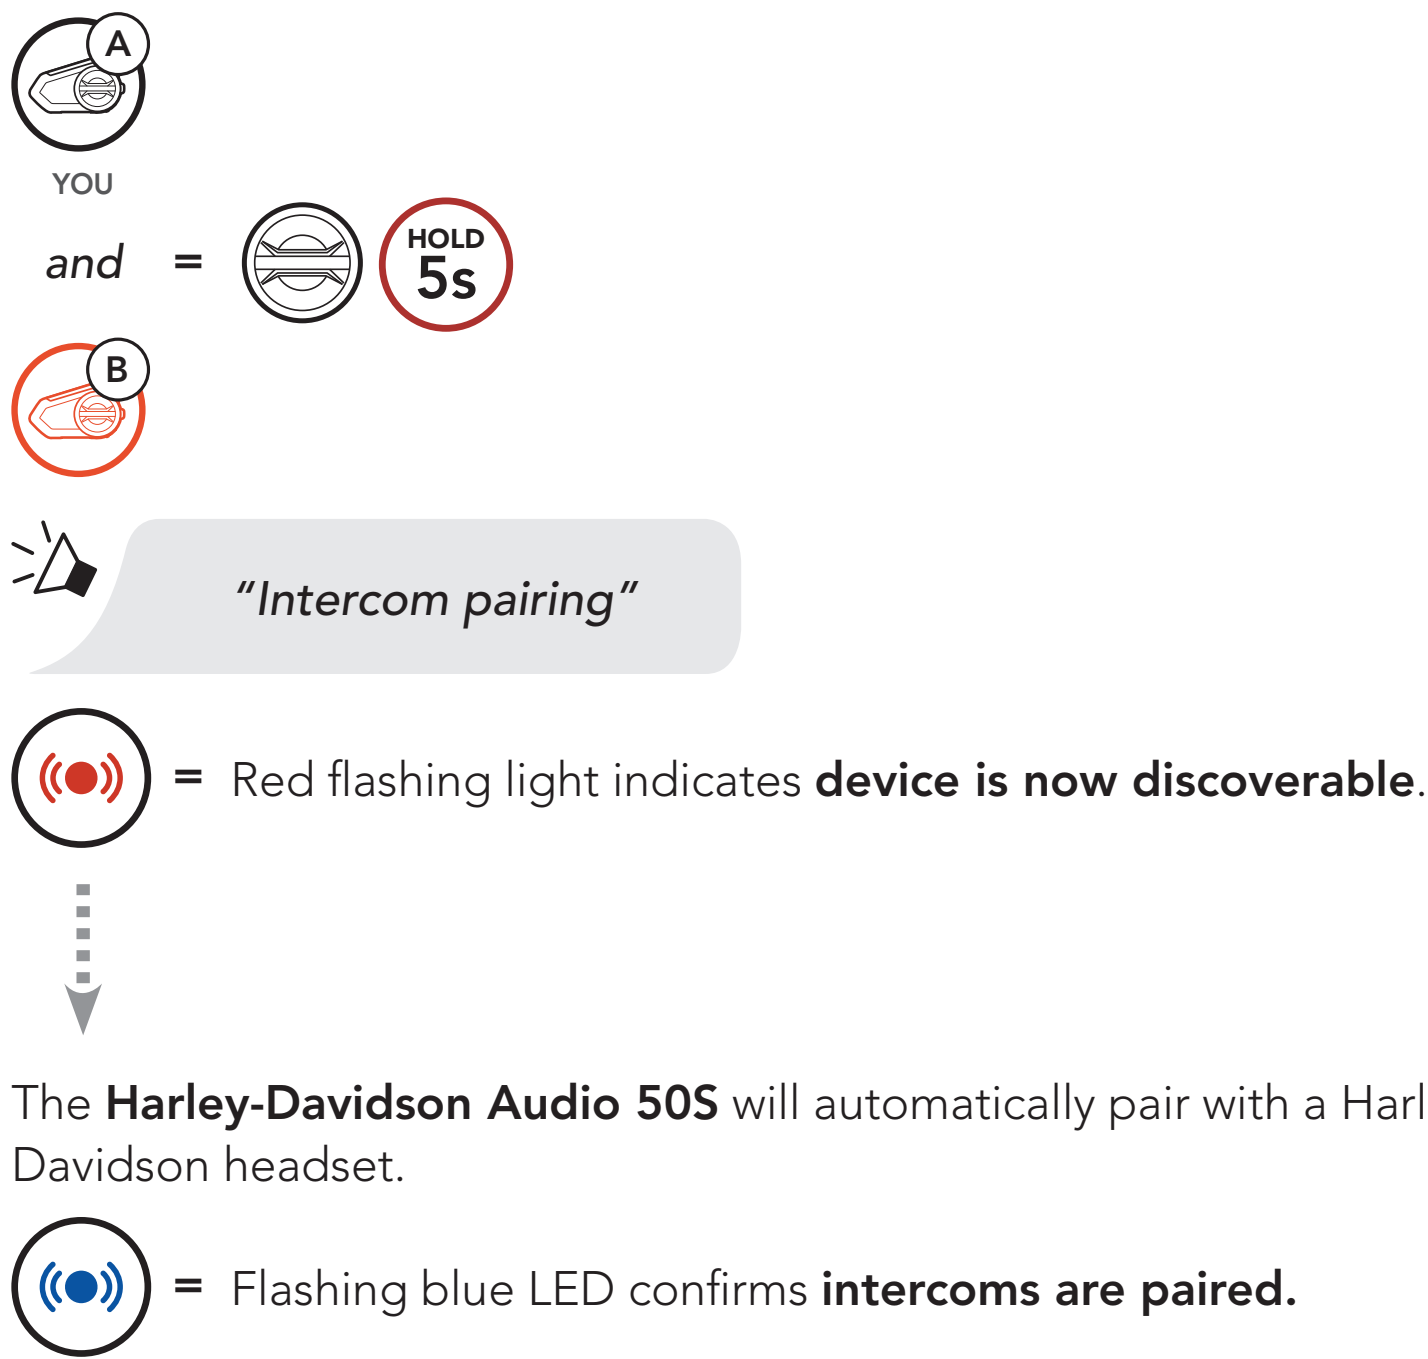

2. Repeat step 1 to pair with **Intercom Friends C & D**.

Last-Come, First-Served

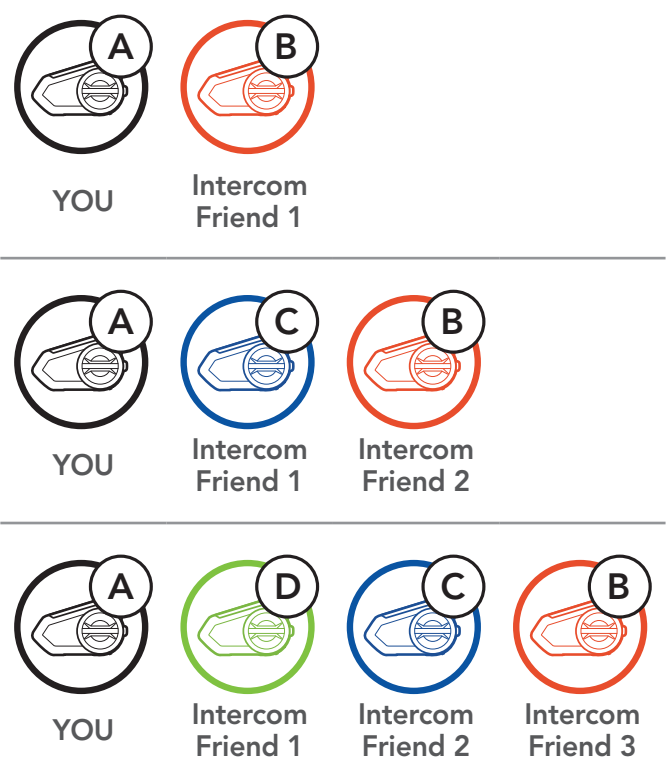


8.2 Two-Way Intercom

You can start or end an intercom conversation with an Intercom Friend by tapping the **Jog Dial**.


1. Tap once for Intercom **Friend 1**.

Start/End with Intercom Friend 1




2. Tap twice for Intercom **Friend 2**.

Start/End with Intercom Friend 2



3. Tap three times for Intercom **Friend 3**.

Start/End with Intercom Friend 3



8.3 Multi-Way Intercom


Multi-Way Intercom enables conference-call-style conversations with up to three **Intercom Friends** at the same time. While **Multi-Way Intercom** is in progress, mobile phone connection is temporarily disconnected. However, as soon as **Multi-Way Intercom** terminates, the mobile phone connection will be reestablished.

8.3.1 Starting a Three-Way Intercom Conference

You (A) can have a **Three-Way Intercom Conference** with two other **Intercom Friends (B & C)** by establishing two intercom connections simultaneously.


- 1. Pair your headset (A) with those of two other **Intercom Friends (B & C)**.

Pair with Intercom Friends B & C

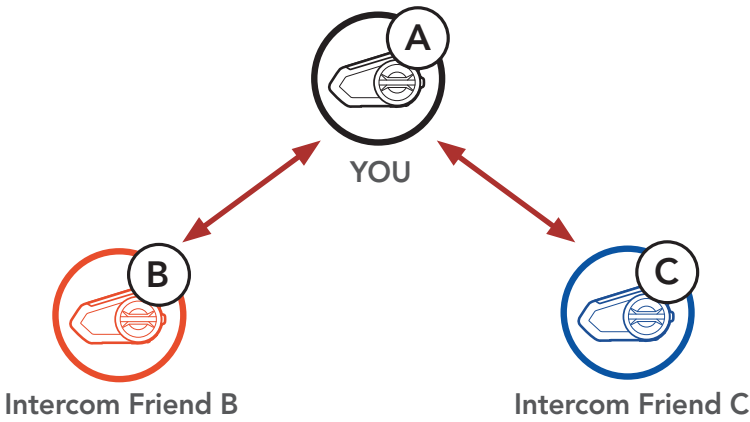


- 2. Start an intercom conversation with one of the two friends in your intercom group. For example, **you (A)** may start an intercom conversation with the **Intercom Friend (B)**. Or, **Intercom Friend (B)** may start an intercom call with **you (A)**.

Starting an Intercom Conversation with Intercom Friend B

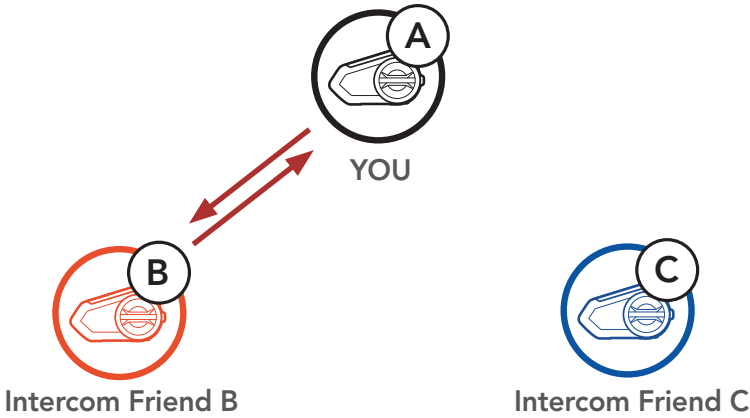


3. Then, **you (A)** can call the second **Intercom Friend (C)**, or the second **Intercom Friend (C)** may join the intercom by making an intercom call to **you (A)**.

Starting an Intercom Conversation with Intercom Friend C

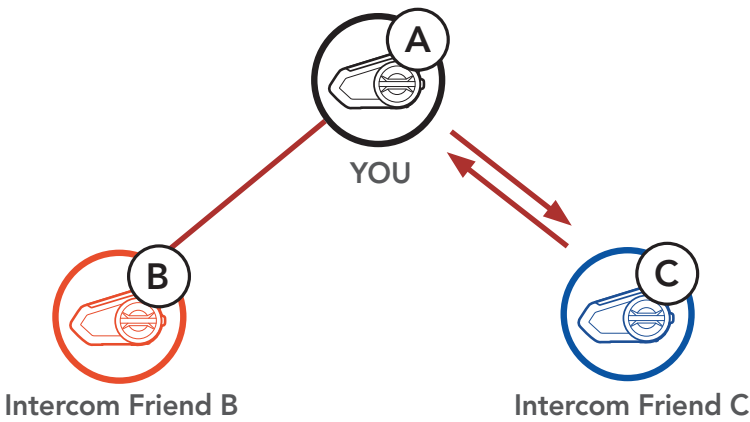

4. Now **you (A)** and two **Intercom Friends (B & C)** are having a **Three-Way Intercom Conference**.


Three-Way Intercom

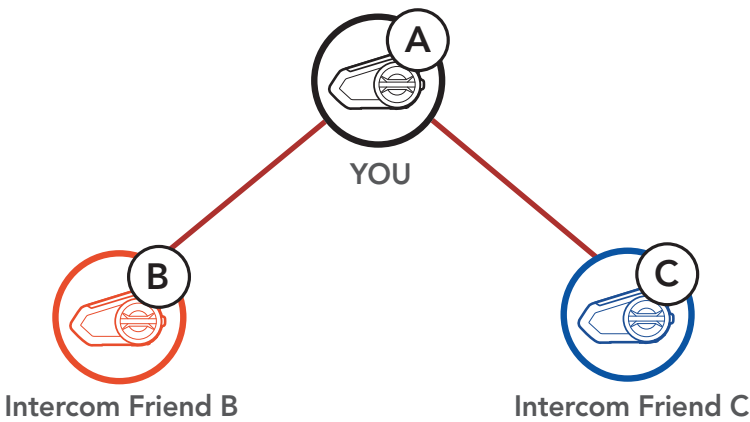

8.3.2 Starting a Four-Way Intercom Conference

With three **Intercom Friends** connected, a new participant **(D)** can make it a **Four-Way Intercom Conference** by making an intercom call to either **(B)** or **(C)**.

Starting a Four-Way Intercom

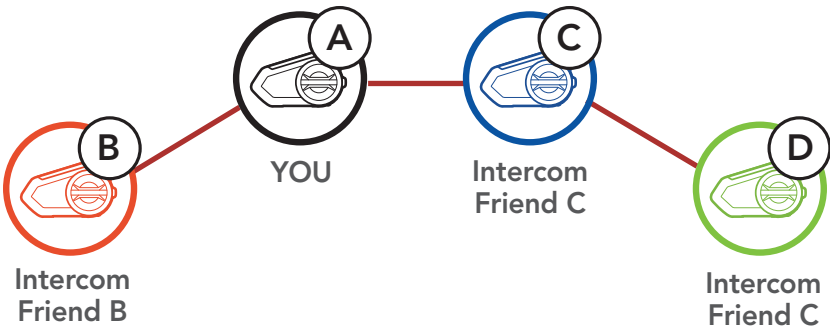

8.3.3 Ending Multi-Way Intercom


- 1. Press and hold the **Jog Dial** for **1 second** until you hear a beep to terminate all intercom connections.
- 2. Tap the **Jog Dial** to disconnect from your first **Intercom Friend**. Double tap the **Jog Dial** to disconnect from your second **Intercom Friend**.

8.4 Three-Way Conference Phone Call with Intercom Users

You can have a **Three-Way Conference Phone Call** by adding an **Intercom Friend** to the mobile phone conversation.


- 1. During a mobile phone call, tap the **Jog Dial once, twice or, three times** to invite one of your **Intercom Friends** to the conversation.

Invite an Intercom Friend into Phone Conference

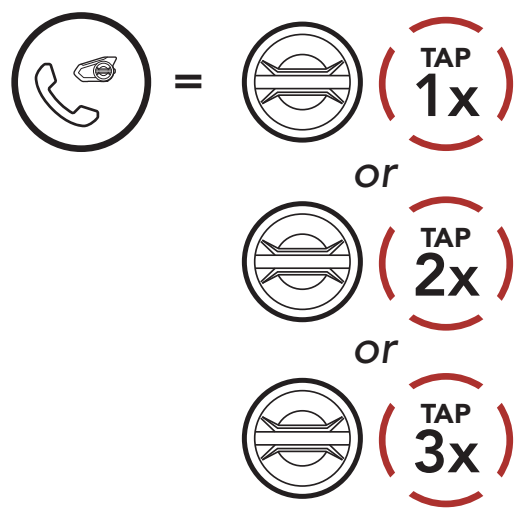


- 2. To disconnect the intercom during a conference phone call, tap the **Jog Dial once, twice or three times**.

Disconnect Intercom Friend from Conference

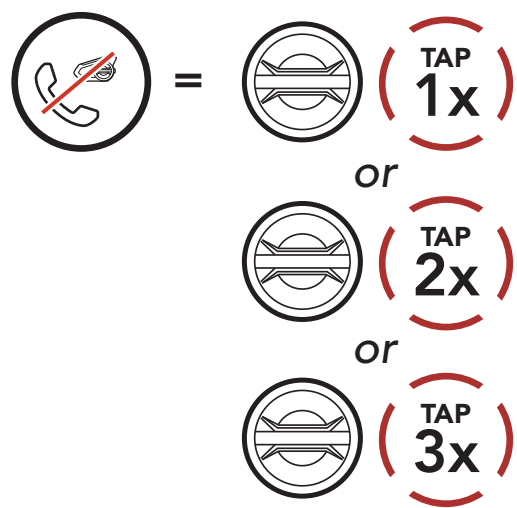

3. To disconnect the mobile phone call during a conference phone call, tap the **Phone Button**.

End Phone Call from Conference

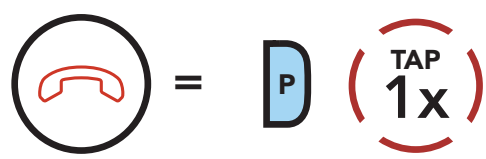



Note: When you have an incoming intercom call during a mobile phone call, you will hear high tone double beeps.

8.5 Group Intercom


Group Intercom allows you to instantly create a **Multi-Way Conference Intercom** with three of the most recently paired headsets.

- 1. Go through intercom pairing with up to three headsets you want to have **Group Intercom** with.
- 2. Press and hold the **Ambient Mode Button** for **1 second** to begin **Group Intercom**. The LED will flash green and you will hear a voice prompt, **"Group intercom"**.

Start Group Intercom

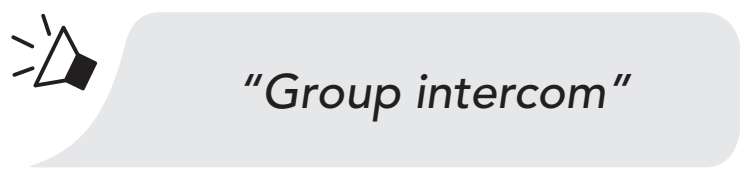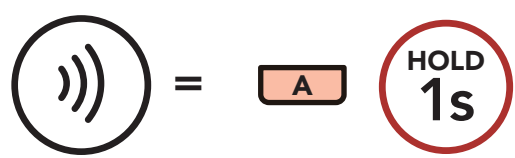


- 3. When all of the headsets are connected together, everyone will hear a voice prompt, **"Group intercom connected."**

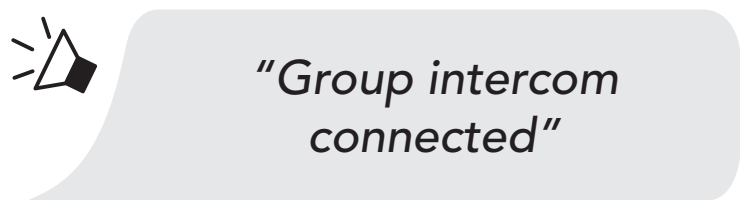

4. To terminate **Group Intercom**, press and hold the **Ambient Mode Button** for **1 second** during **Group Intercom**. You will hear a voice prompt, “**Group intercom terminated**”.

End Group Intercom

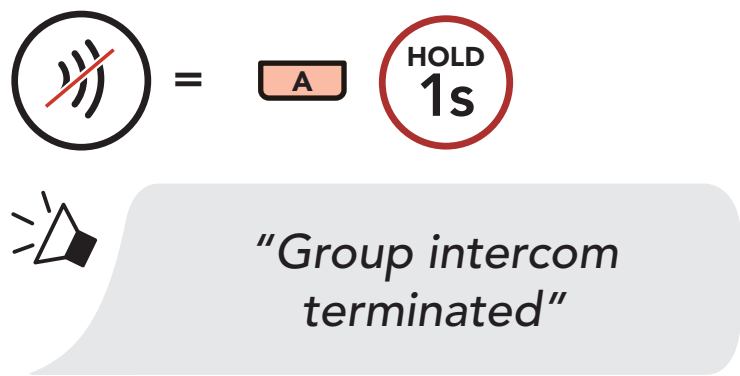


8.6 Mesh Intercom Conference with Bluetooth Intercom Participant


Users can use the existing Bluetooth intercom and **Mesh Intercom** function at the same time. In this case, it is recommended to communicate with other Harley-Davidson headsets via Bluetooth intercom connection and use **Mesh Intercom** between **Harley-Davidson Audio 50S** headsets. A user who is in **Open Mesh** or **Group Mesh** when using Mesh Intercom is able to include up to 3 of their Bluetooth intercom friends. You can start a Two-Way Intercom conversation with one of your three Intercom Friends to include them in the Mesh.

Note:

- The audio quality will be reduced if a **Harley-Davidson Audio 50S** connects to 2 or more Bluetooth intercom friends while in **Open Mesh** or **Group Mesh** when using **Mesh Intercom**.
- If a closed loop is created, as shown below, each user will experience severe noise issues. Harley-Davidson recommends that a closed loop not be created.

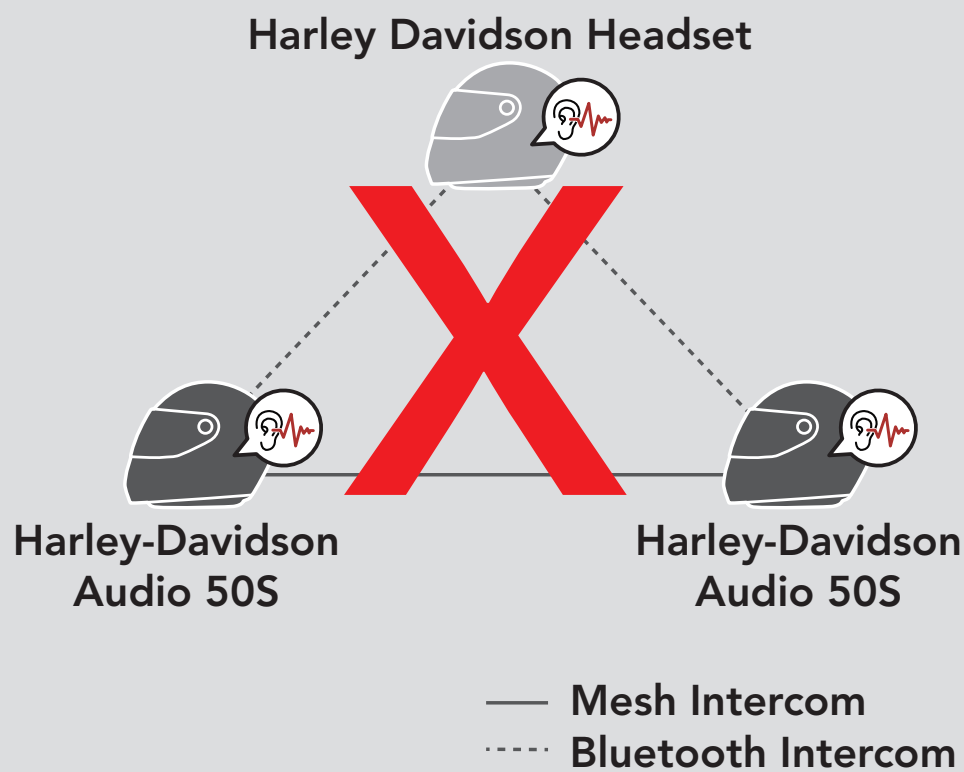

- If **Bluetooth intercom** is accidentally turned on during **Mesh Intercom** communication between **Harley-Davidson Audio 50S** headsets, as shown below, you will hear a voice prompt, “**Mesh intercom disabled, Bluetooth intercom connected**” every **1 minute**. If you turn off the **Bluetooth Intercom** or turn off the **Mesh Intercom**, the voice prompt will no longer come out.

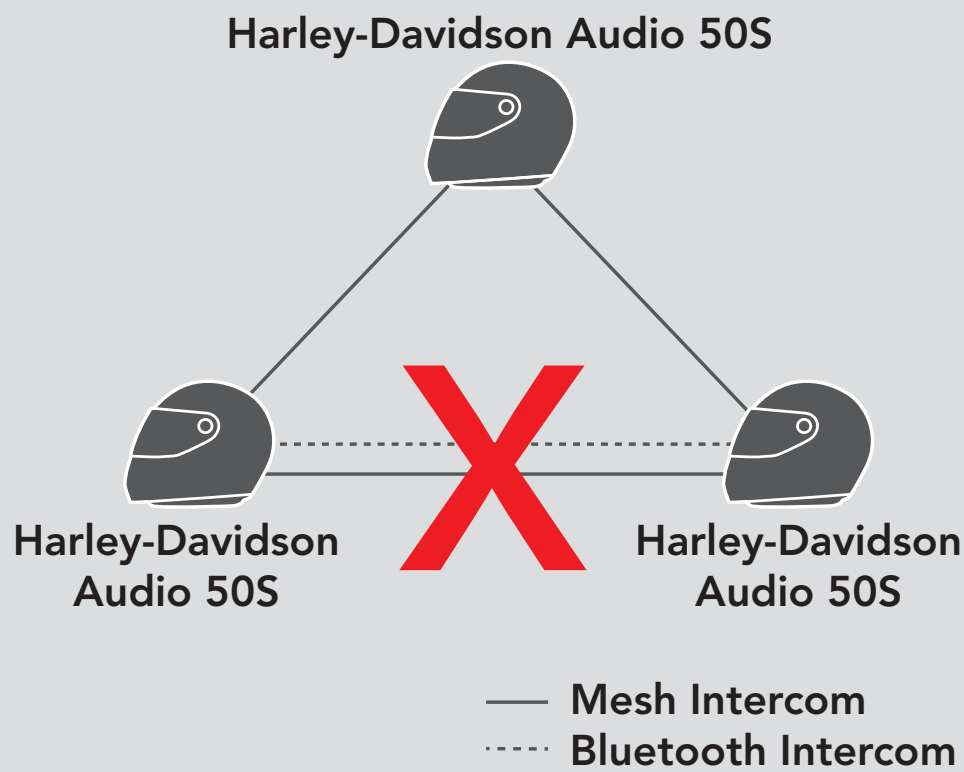

8.7 Universal Intercom

Universal Intercom allows you to have intercom conversations with users of non-Harley-Davidson Bluetooth headsets. You can pair your headset with only one non-Harley-Davidson headset at a time. The intercom distance depends on the performance of the Bluetooth headset to which it is connected. When a non-Harley-Davidson Bluetooth headset is paired with the Harley-Davidson headset, if another Bluetooth device is paired via **Second Mobile Phone Pairing**, it will be disconnected.

1. Execute **Universal Intercom** in the **Headset Configuration Menu**.

Access Universal Intercom in the Configuration Menu

 =  



"Configuration menu"

 =  




"Universal intercom pairing"


 =  

2. Put the non-Harley-Davidson Bluetooth headset in Pairing Mode. The headset will automatically pair with a non-Harley-Davidson Bluetooth headset.
3. You can have **Two-Way Intercom** or **Multi-Way Intercom** communication with up to three **Intercom Friends** using non-Harley-Davidson headsets by following the procedures described below.

Example of a Three-Way Universal Intercom

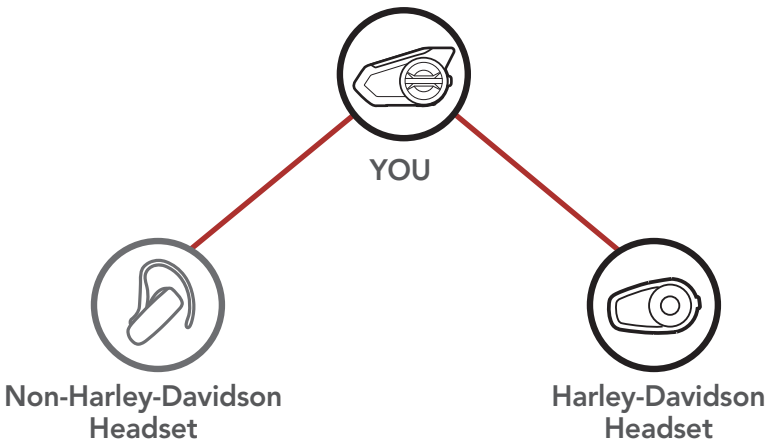

Example of a Four-Way Universal Intercom

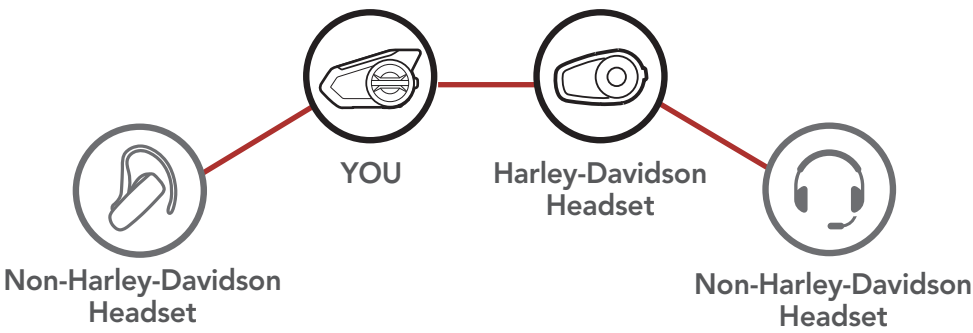

Note: Some non-Harley-Davidson headsets may not support Multi-Way Universal Intercom.

8.8 Mesh Intercom Conference with Two-way Universal Intercom Participant



Users can use the existing **Two-way Universal Intercom** and **Mesh Intercom** function at the same time. In this case, it is recommended to communicate with **non-Harley-Davidson headset** via **Two-way Universal Intercom** connection and use **Mesh Intercom** between **Harley-Davidson Audio 50S** headsets.

A user who is in **Open Mesh** or **Group Mesh** when using **Mesh Intercom** is able to include one **Universal Intercom friend**. You can start a **Two-way Universal Intercom** conversation with your **Universal Intercom Friend** to include it in the **Mesh**.



9. USING THE FM RADIO

9.1 FM Radio On/Off

FM Radio On

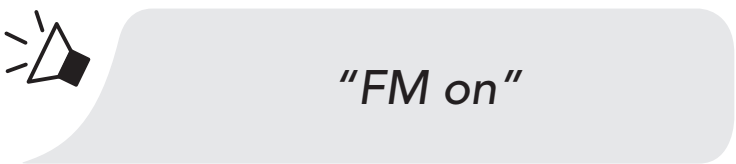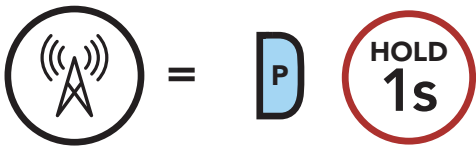

FM Radio Off

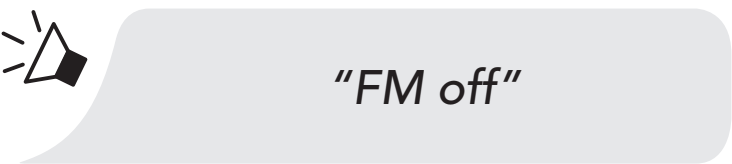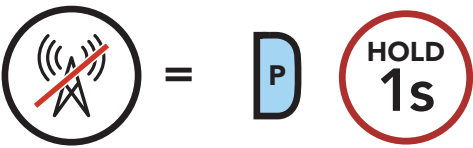


9.2 Seek and Save Radio Stations


The **“Seek”** feature searches for radio stations.

- 1. Search for radio stations.

Seek Stations Forward




Seek Stations Backward



- 2. Save the current station.

Enter Preset Selection Mode




- 3. Navigate through the preset numbers that you want to store.

Navigate Forward/Backward Through Preset Stations




4. Save the station in the preset number you choose or delete the station from memory.

Save Station to the
Preset Number

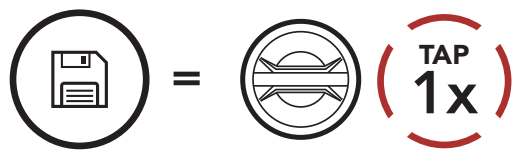

Delete Station from
Memory

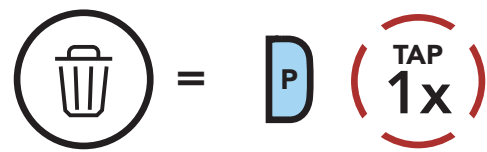


9.3 Scan and Save Radio Stations

The **"Scan"** function automatically searches for radio stations, starting with the current station's frequency, then up from there.



1. Scan for stations.

Start Scanning

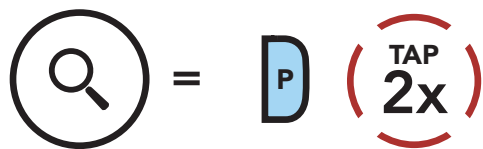


2. The Harley-Davidson tuner pauses at each station it finds for **8 seconds** before moving to the next.
3. Save the current station. The station will be saved as the next preset number.

Save the Current Station

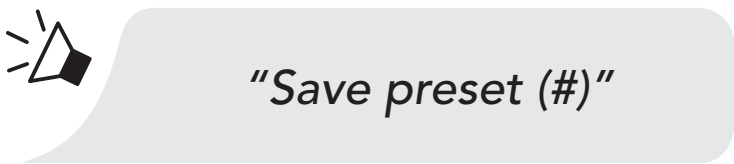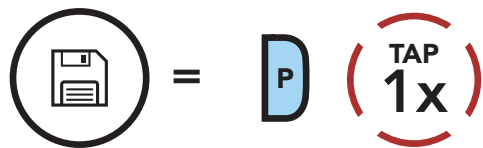

4. Stop scanning.

Stop scanning

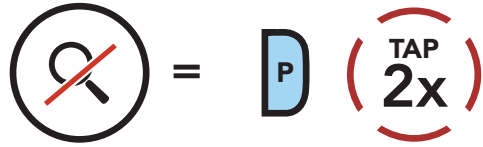


9.4 Temporary Station Preset

The **Temporary Preset** feature automatically finds and saves the nearest 10 radio stations without changing your existing preset stations.

- 1. Automatically find and save 10 stations.

Temporary Stations

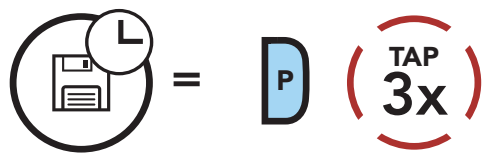


- 2. The temporary preset stations will be cleared when the headset reboots.

9.5 Navigating Preset Stations

Using the methods above, up to 10 radio stations can be stored. You can navigate through the saved stations.

Navigate through Preset Stations

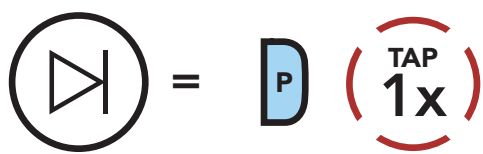

Note: You can use the **Boom Audio Bluetooth Device Manager** or the **SENA MOTORCYCLES App** to save the preset stations.

9.6 Region Selection


You can select the proper FM frequency range for your location from the **Boom Audio Bluetooth Device Manager** or the **SENA MOTORCYCLES App**. Using the region setting, you can optimize the seek function to avoid unnecessary frequency ranges.

Region	Frequency range	Step
Worldwide	76.0 ~ 108.0 MHz	± 100 kHz
North America, South America and Australia	87.5 ~ 107.9 MHz	± 200 kHz
Asia and Europe	87.5 ~ 108.0 MHz	± 100 kHz
Japan	76.0 ~ 95.0 MHz	± 100 kHz

10. AMBIENT MODE

You can hear the ambient sound outside of your helmet by activating the **Ambient Mode**.

Start/Stop Ambient Mode

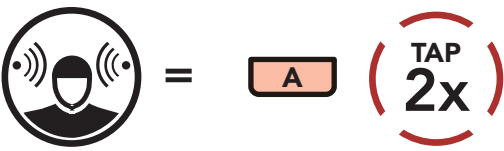

Note: The **Ambient Mode** has higher priority than mobile phone, so you cannot listen to music, or have an intercom conversation if the **Ambient Mode** is activated.

11. VOICE COMMAND

The **Voice Command** of the headset allows you to operate certain operations by simply using your voice. You can control the headset completely handsfree using the voice recognition. Multi-language Voice Command supports **English, French, German, Spanish, Italian, Chinese, Japanese, and Russian.**

Speak a Voice Command List

Mode Status	Function	Voice Command
Standby/ Bluetooth Intercom/Mesh Intercom/FM Radio/Music	Check battery	"Hey Sena, Check Battery"
	Volume Up	"Hey Sena, Volume Up"
	Volume Down	"Hey Sena, Volume Down"
	Phone Pairing	"Hey Sena, Phone Pairing"
	Bluetooth Intercom Pairing	"Hey Sena, Pairing Intercom"
	Start/End each Bluetooth Intercom	"Hey Sena, Intercom [one, two, three]"
Standby/ Bluetooth Intercom/FM Radio/Music	Turn on Mesh Intercom	"Hey Sena, Mesh On"
Mesh Intercom	Turn off Mesh Intercom	"Hey Sena, Mesh Off"
	Mesh Grouping	"Hey Sena, Mesh Grouping"
	Switch to Open Mesh	"Hey Sena, Open Mesh"
	Switch to Group Mesh	"Hey Sena, Group Mesh"
	End the Bluetooth intercom and Mesh intercom	"Hey Sena, End intercom"
Standby/ Bluetooth Intercom/Mesh Intercom	Play Music	"Hey Sena, Play Music"
Standby/ Intercom/Mesh Intercom/Music	Turn on FM radio	"Hey Sena, FM Radio On"

Mode Status	Function	Voice Command
Music/FM Radio	- FM - Next Preset - Music - Next Track	"Hey Sena, Next"
	- FM - Previous Preset - Music - Previous Track	"Hey Sena, Previous"
Music	Pause Music	"Hey Sena, Stop Music"
FM Radio	Turn off FM Radio	"Hey Sena, FM Radio Off"
Answer an Incoming Call		"Answer"
Ignore an Incoming Call		"Ignore"

Note:

- You can set a language to another language by using the **Headset Language** feature on the **SENA MOTORCYCLES App**.
- If you set a language that does not support voice commands, the voice command will works only with English commands.
- You can see the another language’s voice command list on the **SENA MOTORCYCLES App**.
- **Voice command** performance may vary based on the environmental conditions including riding speed, helmet type and ambient noise. To improve the performance, minimize wind noise on the microphone by using a large microphone sponge and closing the visor.

12. FUNCTION PRIORITY AND FIRMWARE UPGRADES

12.1 Function Priority

The headset prioritizes connected devices in the following order:

- (highest) Ambient Mode
- Mobile phone
- Mesh Intercom/Bluetooth Intercom
- Music sharing via Bluetooth stereo
- FM radio
- Stereo music by audio cable
- (lowest) Bluetooth stereo music

A lower-priority function gets interrupted by a higher-priority function. For example, stereo music will be interrupted by an **Intercom Conversation**; an **Intercom Conversation** will be interrupted by an incoming mobile phone call.

12.2 Firmware Upgrades

The headset supports firmware upgrades. There are two ways to upgrade firmware.

12.2.1 Using the WiFi Adapter

You can upgrade firmware using the **WiFi Adapter**. You can automatically install any available firmware updates to your headset via your wireless network. Please refer to the **WiFi Adapter Quick Start Guide** included in the package.

12.2.2 Using the Boom Audio Bluetooth Device Manager

You can upgrade firmware using the **Boom Audio Bluetooth Device Manager**.

The **USB Power & Data Cable (USB-C)** must be connected to your PC to upgrade firmware using the **Boom Audio Bluetooth Device Manager**.

Note:

- A **USB Power & Data Cable (USB-C)** is not included in the package.
- Do not connect the **WiFi Adapter** to your PC to use the **Boom Audio Bluetooth Device Manager**.


Please visit oem.sena.com/harley-davidson to check for the latest software downloads.

[Click Here to Visit oem.sena.com/harley-davidson](https://oem.sena.com/harley-davidson)


13. CONFIGURATION SETTING

13.1 Headset Configuration Setting

Access the Configuration Menu Navigate Between Menu Options

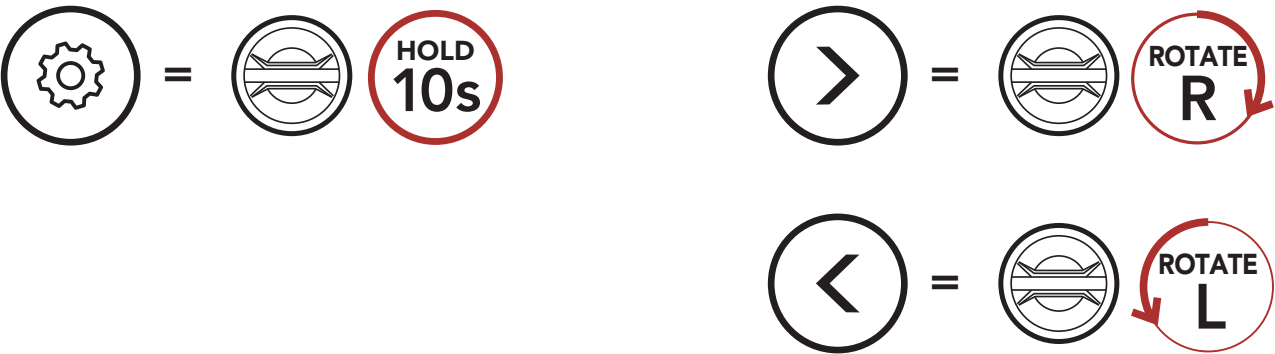

Execute Menu Options



Headset Configuration Menu

Voice Configuration Menu	Tap the Phone Button
Delete All Pairings	Execute
Remote Control Pairing	Execute
Universal Intercom Pairing	Execute
Exit	Execute

13.1.1 Delete All Pairings

Delete All Bluetooth Pairing Information stored in the Bluetooth system.

13.1.2 Remote Control Pairing

You can remotely control the headset using **Sena Remote Control devices** (sold separately).

1. Turn on the headset and the Remote Control device.
2. Execute **Remote Control Pairing**.
3. Enter pairing mode in the Remote Control device. The headset will automatically connect with the Remote Control device in pairing mode.

13.2 Software Configuration Setting

You can change the settings of the headset through the **Boom Audio Bluetooth Device Manager** or the **SENA MOTORCYCLES App**.

13.2.1 Speed Dial

Assign phone numbers for speed dialing to make a phone call quickly.

13.2.2 Channel Setting (Default: channel 1)

If the **Open Mesh** communication experiences interference because other groups are also using the **channel 1 (default)**, change the channel. You can select one of 1 to 9 channels.

13.2.3 Headset Language

You can select the device language. The selected language is maintained even when the headset is rebooted.

13.2.4 Audio Equalizer (Default: Music Balance)

Increase or decrease the decibel level of different frequency ranges of audio.

- **Music Balance** will adjust frequency response that gives the most natural balance between lows, mids, and highs.
- **Music Enhanced** will lower midrange frequencies slightly.
- **Voice** will increase midrange frequencies of the human voice and cut environmental noise for better clarity with voice communication.
- **Bass Boost** will increase the bass range of audio (130 Hz and below).
- **Treble Boost** will increase the high range of audio (6 kHz and above).

13.2.5 VOX Phone (Default: Enable)

If this feature is enabled, you can answer incoming calls by voice. When you hear a ringtone for an incoming call, you can answer the phone by saying a word such as **"Hello"** loudly or by blowing air into the microphone. **VOX phone** is temporarily disabled if you are connected to intercom. If this feature is disabled, you have to tap the **Jog Dial** or the **Phone Button** to answer an incoming call.

13.2.6 VOX Intercom (Default: Disable)

If **VOX Intercom** is enabled, you can initiate an intercom conversation with the last connected intercom friend by voice. When you want to start intercom, say a word such as **"Hello"** loudly or blow air into the microphone. If you start an intercom conversation by voice, the intercom terminates automatically when you and your intercom friend remain silent for 20 seconds. However, if you manually start an intercom conversation by tapping the **Jog Dial**, you have to terminate the intercom conversation manually. However, if you start the intercom by voice and end it manually by tapping the **Jog Dial**, you will not be able to start intercom by voice temporarily. In this case, you have to tap the **Jog Dial** to restart the intercom. This is to prevent repeated unintentional intercom connections by strong wind noise. After rebooting the headset, you can start the intercom by voice again.

13.2.7 VOX Sensitivity (Default: 3)

VOX sensitivity can be adjusted depending on your riding environment. **Level 5** is the highest sensitivity setting and **level 1** is the lowest.

13.2.8 Bluetooth Intercom Audio Multitasking (Default: Disabled)

Audio Multitasking (Bluetooth Intercom Audio Multitasking and Mesh Intercom Audio Multitasking) allows you to have an intercom conversation while simultaneously listening to music, FM radio, or GPS instructions. The overlaid audio is played in the background with reduced volume whenever there is an intercom conversation and will return to normal volume once the conversation is finished.

The **Mesh Intercom Audio Multitasking** feature is always **on**.

Note:

- For **Bluetooth Intercom Audio Multitasking** to work properly, you need to power the headset off and on. **Please restart the headset.**
- **Bluetooth Intercom Audio Multitasking** will be activated during two-way intercom conversations with a headset that also supports this feature.
- Some GPS devices may not support this feature.
- The **Audio Multitasking** feature can be configured through the **Intercom-Audio Overlay Sensitivity** and the **Audio Overlay Volume Management settings**.

13.2.9 Intercom-Audio Overlay Sensitivity (Default: 3)

The music, FM radio and GPS volume will be lowered to play in the background if you talk over the intercom while the overlaid audio is playing. You can adjust the intercom sensitivity to activate this background audio mode. **Level 1** has the lowest sensitivity and **level 5** has the highest sensitivity.

Note: If your voice is not louder than the sensitivity of the selected level, the overlaid audio will not be lowered.

13.2.10 Audio Overlay Volume Management (Default: Disable)

The music, FM radio and GPS overlaid audio reduces in volume whenever there is an ongoing intercom conversation. If **Audio Overlay Volume Management** is enabled, the volume level of the overlaid audio will not be reduced during an intercom conversation.

13.2.11 HD Intercom (Default: Enable)

HD Intercom enhances the two-way intercom audio from normal quality to HD quality. **HD Intercom** will become temporarily disabled when you enter into a multi-way intercom. If this feature is disabled, the two-way intercom audio will change to normal quality.

Note:

- The intercom distance of **HD Intercom** is relatively shorter than that of normal intercom.
- **HD Intercom** will become disabled temporarily when **Bluetooth Intercom Audio Multitasking is enabled**.

13.2.12 HD Voice (Default: Enable)

HD Voice allows you to communicate in high-definition during phone calls. This feature increases the quality so that the audio will be crisp and clear during phone call conversations.

If this feature is enabled, incoming phone calls will interrupt intercom conversations and audio from the SR10 will not be heard during intercom conversations. Three-Way Conference Phone Call with Intercom Participant will not be available if **HD Voice** is enabled.

Note:

- Refer to the manufacturer of your Bluetooth device that will be connected to the headset to see if it supports **HD Voice**.
- **HD Voice** is active only when **Bluetooth Intercom Audio Multitasking** is disabled.

13.2.13 Smart Volume Control (Default: Disable)

Enabling **Smart Volume Control** automatically changes the level of the speaker volume based on the level of the environment noise. You can enable it by setting the sensitivity to **low**, **medium** or **high**.

13.2.14 Sidetone (Default: Disable)

Sidetone is audible feedback of your own voice. It helps you to naturally speak at the correct level according to varying helmet noise conditions. If this feature is enabled, you can hear what you are speaking during an intercom conversation or a phone call.

13.2.15 Voice Prompt (Default: Enable)

You can disable voice prompts by software configuration settings, but the following voice prompts are always on.

- Headset configuration settings menu, battery level indicator, speed dial, FM radio functions

13.2.16 RDS AF Setting (Default: Disable)

Radio Data System (RDS) Alternative Frequency (AF) Setting allows a receiver to re-tune to the second frequency location when the first signal becomes too weak. With RDS AF enabled on the receiver, a radio station with more than one frequency can be used.

13.2.17 FM Station Guide (Default: Enable)

When **FM Station Guide** is enabled, FM station frequencies are given by voice prompts as you select preset stations. When **FM Station Guide** is disabled, the voice prompts on FM station frequencies will not be given as you select preset stations.

13.2.18 Advanced Noise Control™ (Default: Enable)

When **Advanced Noise Control** is enabled, the background noise is reduced during an intercom conversation. When it is disabled, the background noise is mixed with your voice during intercom.

14. TROUBLESHOOTING


Please visit **support.sena.com** for answers to frequently asked questions. This detailed online FAQ section deals with troubleshooting, illustrates case studies and contains tips on using the headset.

Click Here to Visit support.sena.com

14.1 Fault Reset

When the headset is not working properly, you can easily reset the unit:

- 1. Locate the **Pinhole Fault Reset Button** below on the back of the main unit.
- 2. Gently insert a paperclip into the hole and tap the **Pinhole Fault Reset Button** with light pressure.

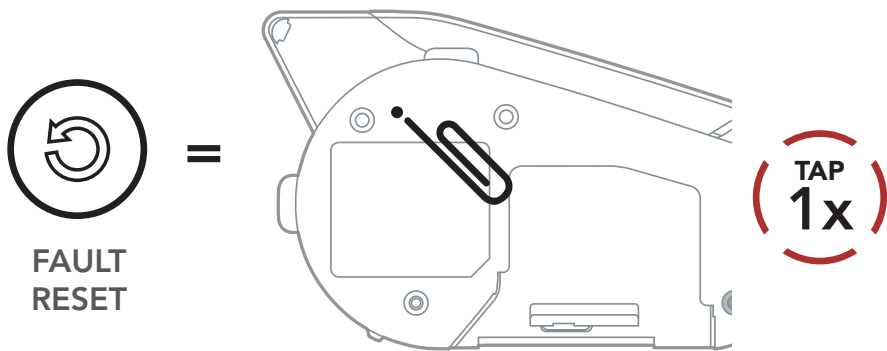


- 3. The headset will shut down.



Note: Fault Reset will not restore the headset to factory default settings.

14.2 Factory Reset

To erase all of your settings and start fresh, the headset can be restored to factory default settings using the **Factory Reset** feature.

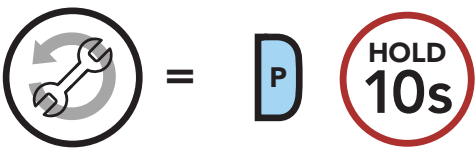

 *"Factory Reset"*

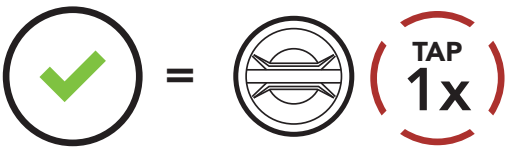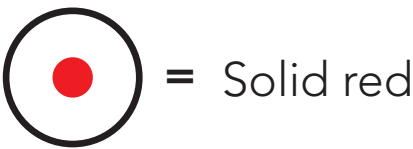

 *"Headset reset, good-bye"*

Note: If you press the **Phone Button** or do not press the **Jog Dial** within **5 seconds**, the reset attempt is canceled and the headset returns to standby mode. You will hear a voice prompt saying **"Canceled"**.