



devolo Mesh WiFi 2 Installation Guide


[Home](#) » [devolo](#) » devolo Mesh WiFi 2 Installation Guide 

devolo

Mesh WiFi



Installation
devolo Mesh WiFi 2

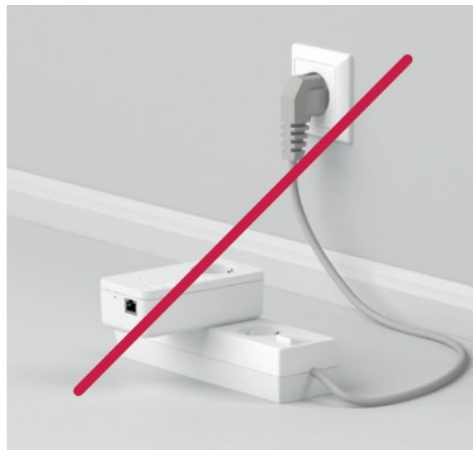

When operated normally, all adapters should be plugged into power sockets on the wall. Ideally, however, the adapters should be initially set up in the room where the router is. This means you can plug the adapters into a power strip temporarily for the installation process.

A. Installation via App

Download now!

devolo Home Network App




<https://www.devolo.com/homenetworkapp>




Download the devolo Home Network app. An installation wizard will take you through the configuration step-by-step. If you prefer to carry out the installation without the app, follow the steps in Part B.

1B Installation without App

Plug-in Adapter 1 + 2

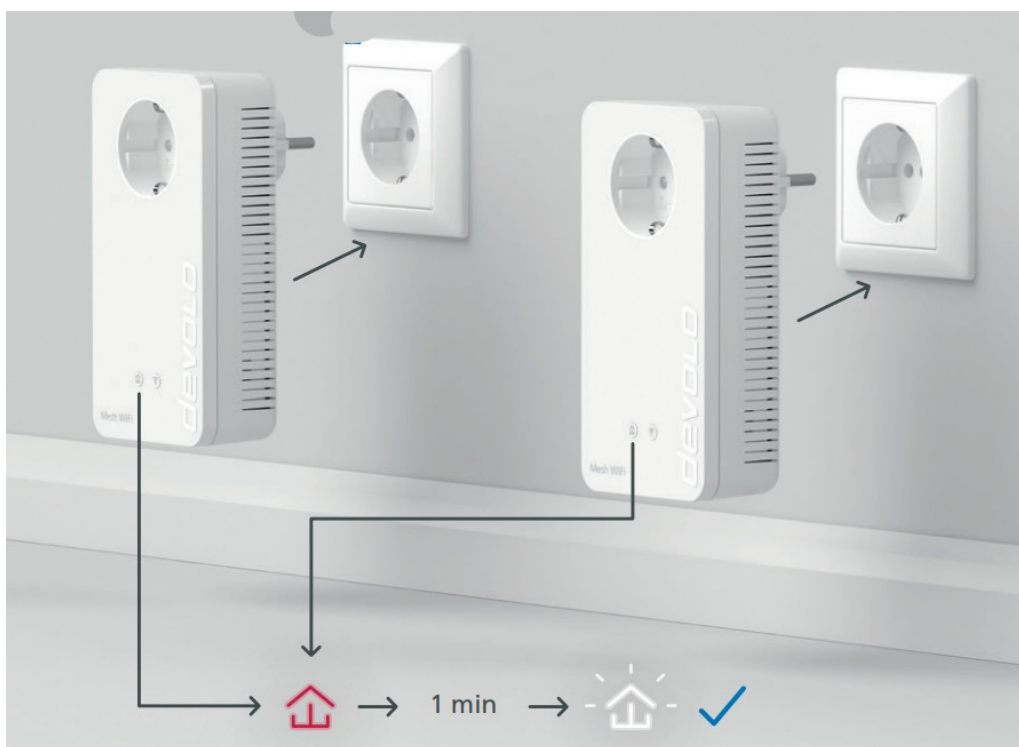


Plug two of the adapters into an available power socket and wait until the  LED flashes white quickly (about 1 min.).


2B Plug-in Adapter 3




Plug the third adapter into the power socket and connect it to your router with the included Ethernet cable.
3B Automatic Pairing




The encryption process takes place automatically. During this time, the  LEDs of all adapters will flash white.
4B WPS Configuration

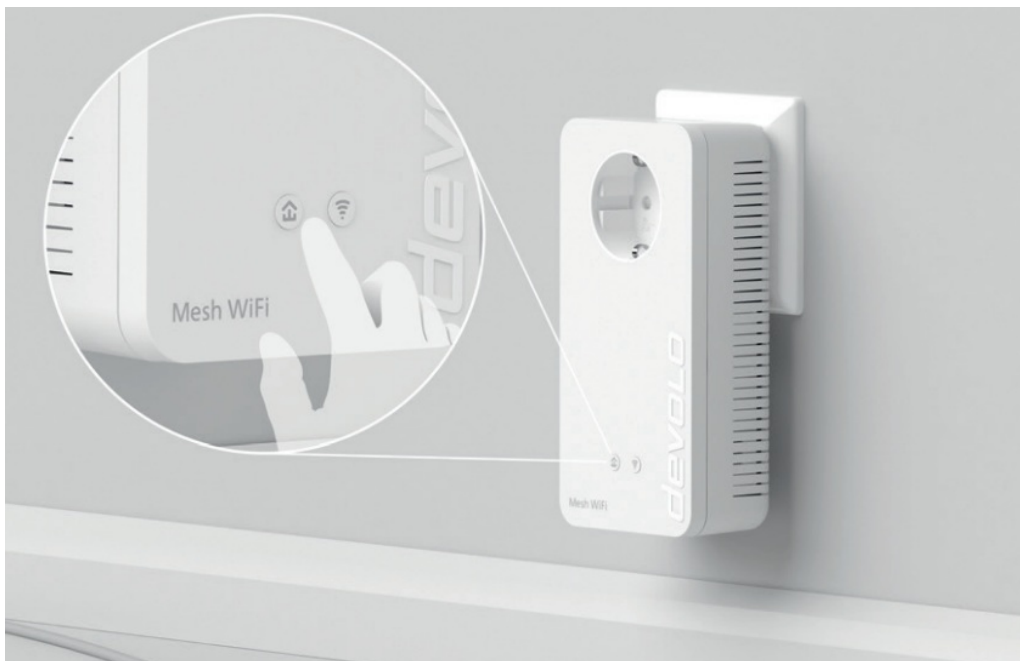

Press the  button on adapter 1.
5B WPS Configuration

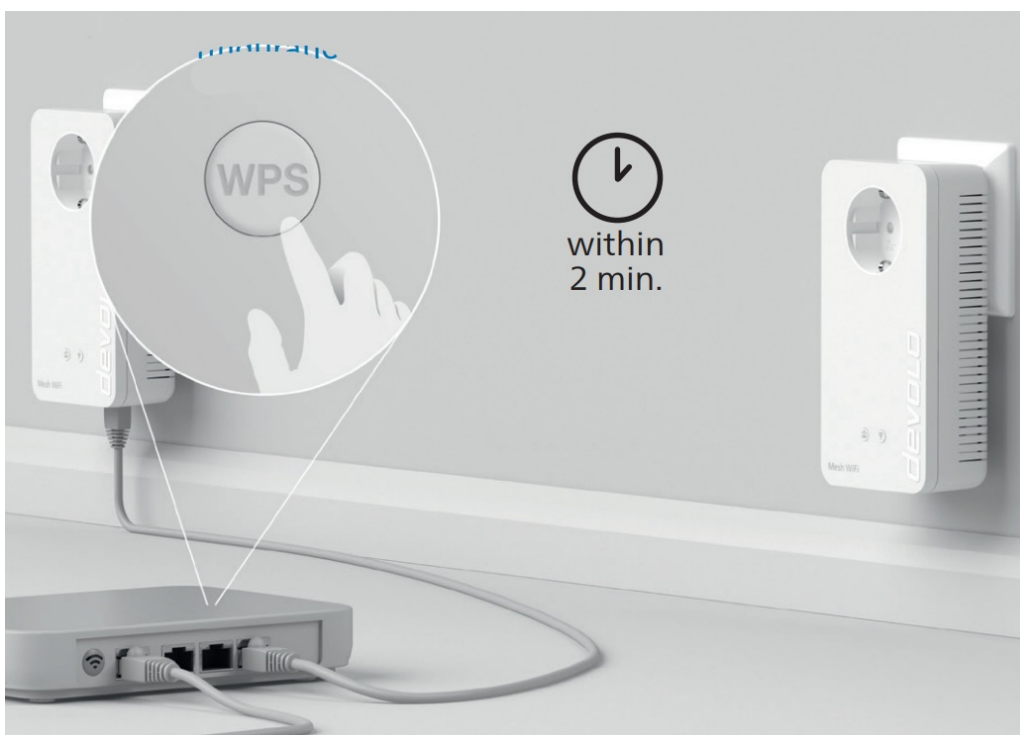


Within 2 minutes, press the WPS button on your Wi-Fi router. If necessary, please refer to the manual for your router to find the location of the WPS button and how long you have to press it.
6B Switch off Router

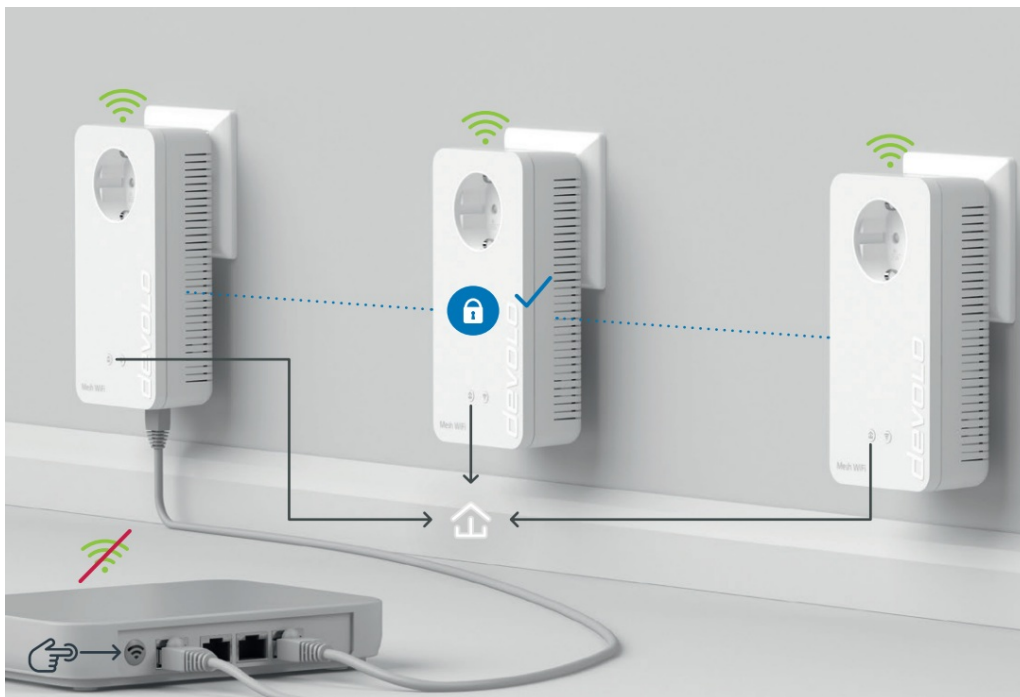



Once the LEDs of all devices are flashing white continuously, the process is complete (a maximum of 3 minutes). Now switch off the Wi-Fi on your router (if necessary, refer to the manual for your router).

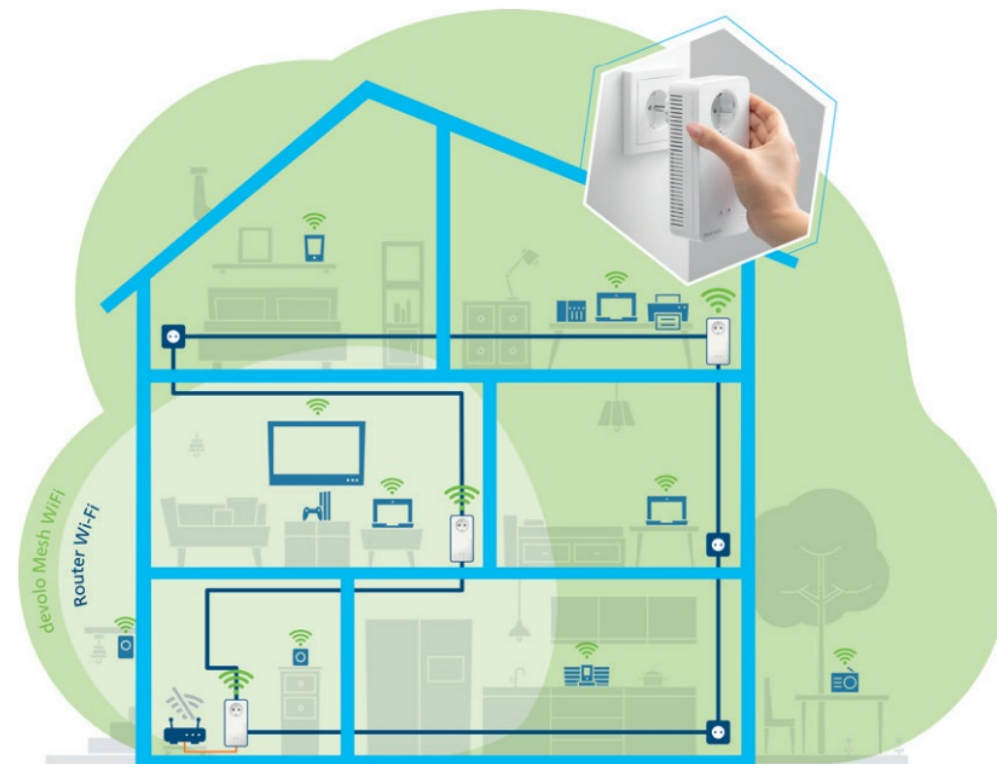7B devolo Mesh WiFi




All devolo Mesh WiFi devices now form a joint Mesh Wi-Fi network. You can now put the adapters in whatever locations you choose.

PLC button 


| Duration of the button press | Action | LED behavior |
|---|--|--|
| 1 second | Start pairing with other devolo adapters | Flashes white |
| > 10 seconds | Reset devolo adapter to factory settings | Lights up red |
| PLC LED  | The devolo Mesh WiFi adapter ... | LED behavior |
| | <ul style="list-style-type: none"> is working perfectly. It is connected to other devolo adapters. | Lights up white |
| | <ul style="list-style-type: none"> is currently establishing a pairing connection with another adapter. | Quickly flashes white |
| | <ul style="list-style-type: none"> is not connected to the network* | Slowly flashes white |
| | <ul style="list-style-type: none"> is in standby mode. | Alternately flashes white and red |
| | <ul style="list-style-type: none"> is currently undergoing a software update. | Flashes red |
| | <ul style="list-style-type: none"> has a poor Powerline connection. | Lights up white and then briefly flashes red |
| | <ul style="list-style-type: none"> is currently in the start-up process. cannot see any other devolo adapters. | Lights up red |
| | <ul style="list-style-type: none"> no longer have any LED function since it was disabled by the user. | None |

Wi-Fi button 


| Duration of the button press | Action | LED behaviour |
|---|---|------------------------|
| 1 second | WPS function is being carried out | Flashes white |
| > 3 seconds | Wi-Fi is being switched off | LED goes out |
| Wi-Fi LED  | The devolo Mesh WiFi adapter ... | Lights up white |
| | <ul style="list-style-type: none"> • has a fault-free connection to the Internet. | Flashes white |
| | <ul style="list-style-type: none"> • is attempting to establish a connection via WPS. | Off |
| | <ul style="list-style-type: none"> • no longer has any LED function since it was disabled by the user. | Lights up white |


* On page 35 you will see how to carry out manual pairing.


Help: Manual Pairing

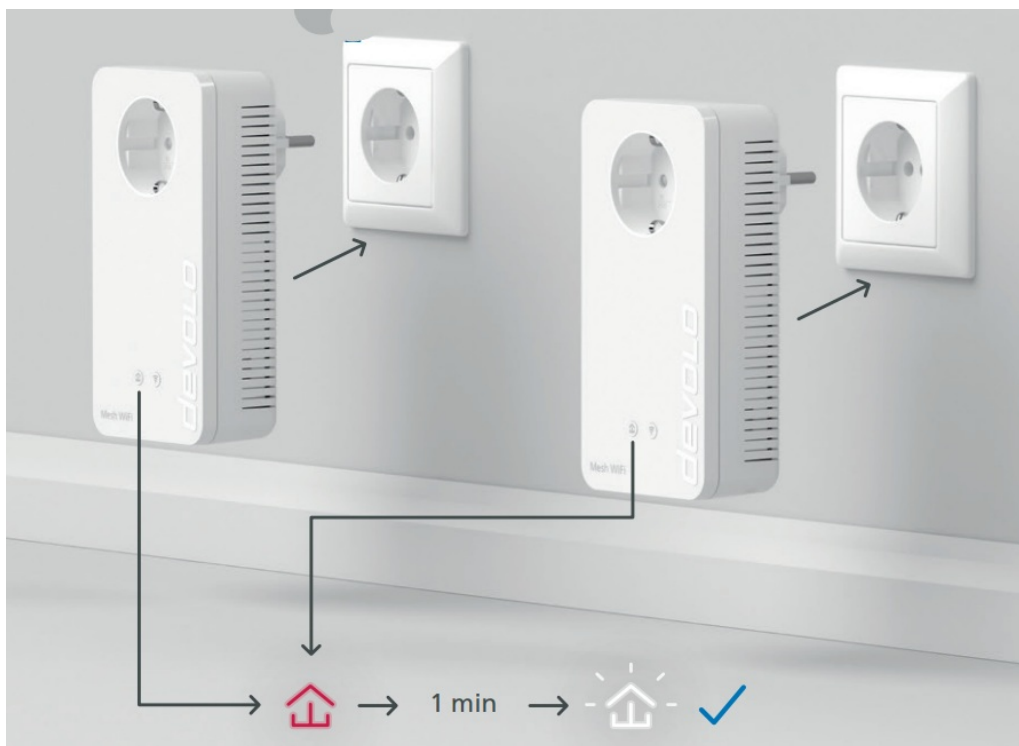

Help: If pairing during initial installation was unsuccessful, you can carry out the manual pairing of the adapters.

Connect the devolo adapters to a free wall socket and wait until the  LED lashes white (approx. 1 min.).

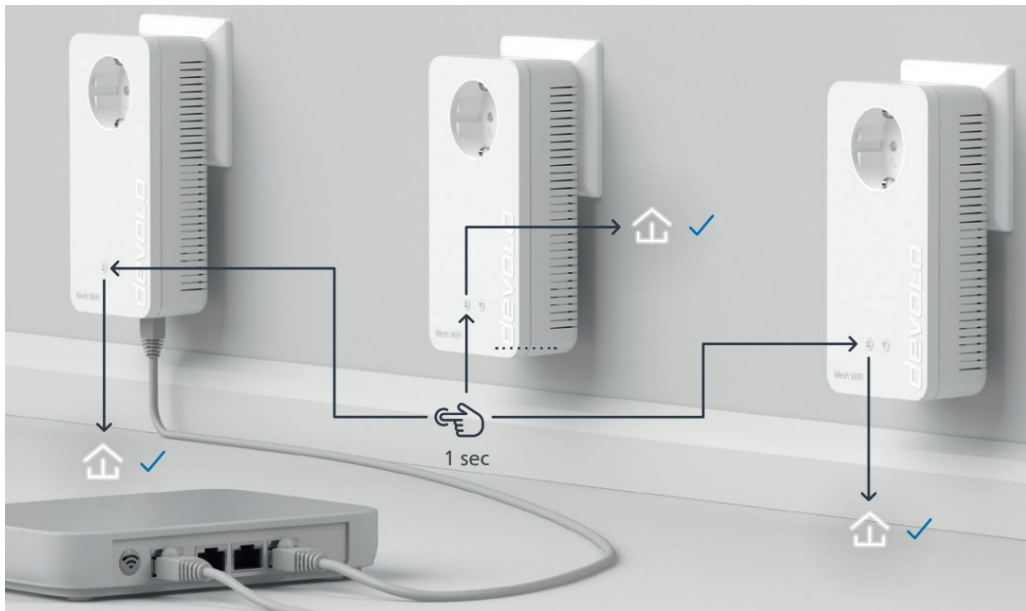

Press the button on all devolo adapters within 3 minutes. Once all  LEDs light up white, the pairing has been completed successfully.

Contents

- [1 Support:](#)
- [2 Documents / Resources](#)
 - [2.1 References](#)
- [3 Related Posts](#)



Support:

| | | |
|-------------------------|--|--|
| Deutschland | www.devolo.de/support | |
| Schweiz/Suisse/Svizzera | www.devolo.ch/support | fr.devolo.ch/support |
| UK | www.devolo.co.uk/support | |
| France | www.devolo.fr/support | |
| Italia | www.devolo.it/supporto | |
| España | www.devolo.es/soporte | |
| Portugal | www.devolo.pt/suporte | |
| Netherlands | www.devolo.nl/support | |
| Belgien/Belgique/Belgie | www.devolo.be/support | |
| Sweden | www.devolo.se/support | |
| Other countries | www.devolo.com/support | |

Warranty: 3 years

If your devolo device is found to be defective during initial installation or within the warranty period, please contact the vendor who sold you the product. The vendor will take care of the repair or warranty claim for you. The complete warranty conditions can be found at www.devolo.com/warranty.

devolo

devolo AG
Charlottenburger Allee 67
52068 Aachen
Germany
devolo.com
46166/0820

Documents / Resources



devolo devolo Mesh WiFi 2 [pdf] Installation Guide

devolo, Mesh, WiFi 2

References

- [▮ Internet anywhere - devolo cures weak Wi-Fi | devolo AG](#)
- [▮ Processing](#)
- [▮ Support - devolo AG](#)
- [▮ Support - devolo AG](#)
- [▮ Support - devolo AG](#)
- [▮ Support - devolo AG](#)
- [▮ Support - devolo AG](#)
- [▮ Support: if you need help or have questions | devolo AG](#)
- [▮ Support - devolo AG](#)
- [▮ Internet anywhere – devolo cures weak Wi-Fi | devolo AG](#)
- [▮ Support zu Fragen rund um devolo Produkte | devolo AG](#)
- [▮ Support | devolo AG](#)
- [▮ Assistance téléphonique et support | devolo AG](#)
- [▮ Support Hotline | devolo AG](#)
- [▮ Support - devolo AG](#)
- [▮ Support - devolo AG](#)
- [▮ Suporte - devolo AG](#)
- [▮ Support - devolo AG](#)