





devolo Magic 2 WiFi 6 Mesh Kit Installation Guide

[Home](#) » [devolo](#) » devolo Magic 2 WiFi 6 Mesh Kit Installation Guide

devolo Magic 2 WiFi 6 Mesh Kit Installation Guide



When operated normally, all adapters should be plugged into power sockets on the wall. Ideally, however, the adapters should be initially set up in the room where the router is. This means you can plug the adapters into a power strip temporarily for the installation process.

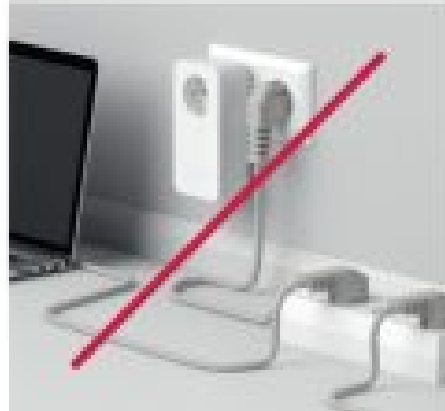

Contents [[hide](#)]


- [1 A Installation via App](#)
- [2 B1 Installation without App](#)
- [3 B2 Plugin Adapter 2](#)
- [4 B3 Automatic Pairing](#)
- [5 B4 WPS Configuration](#)
- [6 B5 WPS Configuration](#)
- [7 B6 Switch off Router](#)
- [8 B7 devolo Magic 2 WiFi 6](#)
- [9 Help: Manual Pairing](#)
- [10 Support](#)
- [11 Manual](#)
- [12 Warranty: 3 years](#)
- [13 Documents / Resources](#)
- [14 Related Posts](#)

A Installation via App

Download the devolo Home Network app. An installation wizard will take you through the configuration step-by-step. If you prefer to carry out the installation without the app, follow the steps in part B.

Download now!


devolo Home Network App

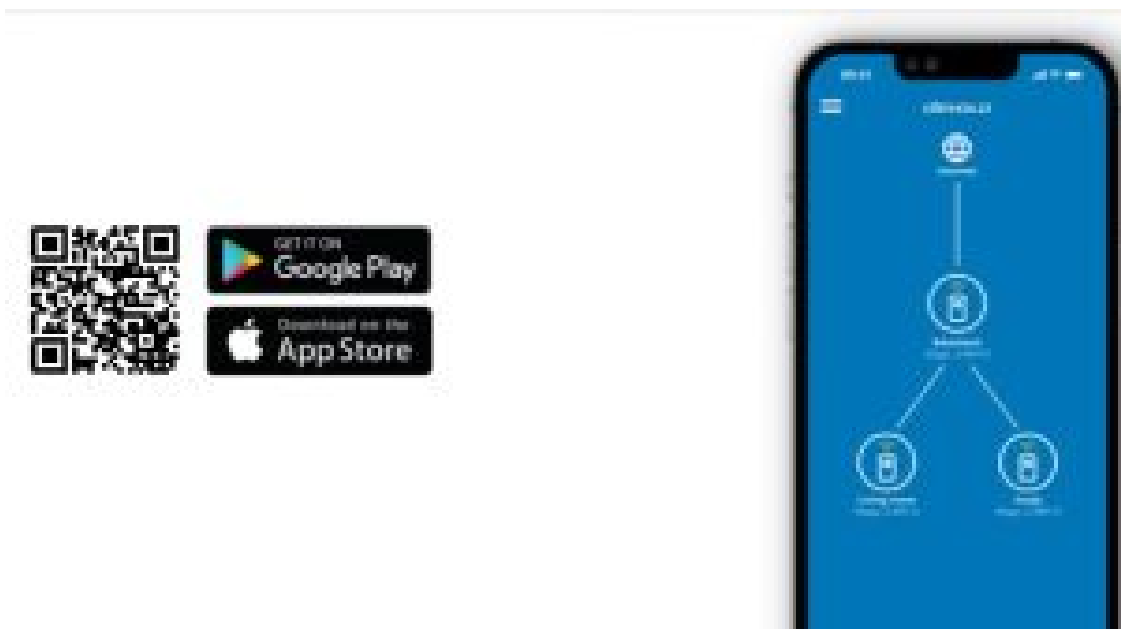

<http://www.devolo.global/homenetworkapp>

B1 Installation without App

Plug-in Adapter 1

Plug the adapter into an available power socket and wait until the  LED flashes white quickly (about 1 min.).




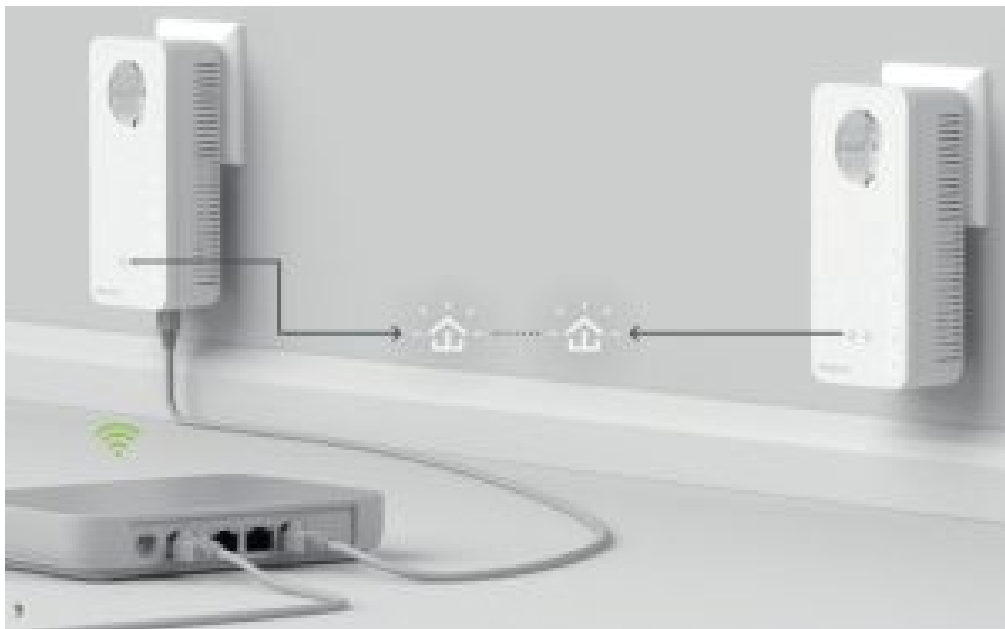
B2 Plug-in Adapter 2

Plug the second adapter into the power socket and connect it to your router with the included Ethernet cable.



B3 Automatic Pairing

The encryption process takes place automatically. During this time, the  LEDs of both adapters will flash white.



B4 WPS Configuration

Press the button of the adapter connected to the router.



B5 WPS Configuration


Within 2 minutes, press the WPS button on your Wi-Fi router. If necessary, please refer to the manual for your router to find the location of the WPS button and how long you have to press it.



within 2 min.

B6 Switch off Router

Once the LEDs of all devices are flashing white continuously, the process is complete (a maximum of 3 minutes). Now switch off the Wi-Fi on your router (if necessary, refer to the manual for your router).

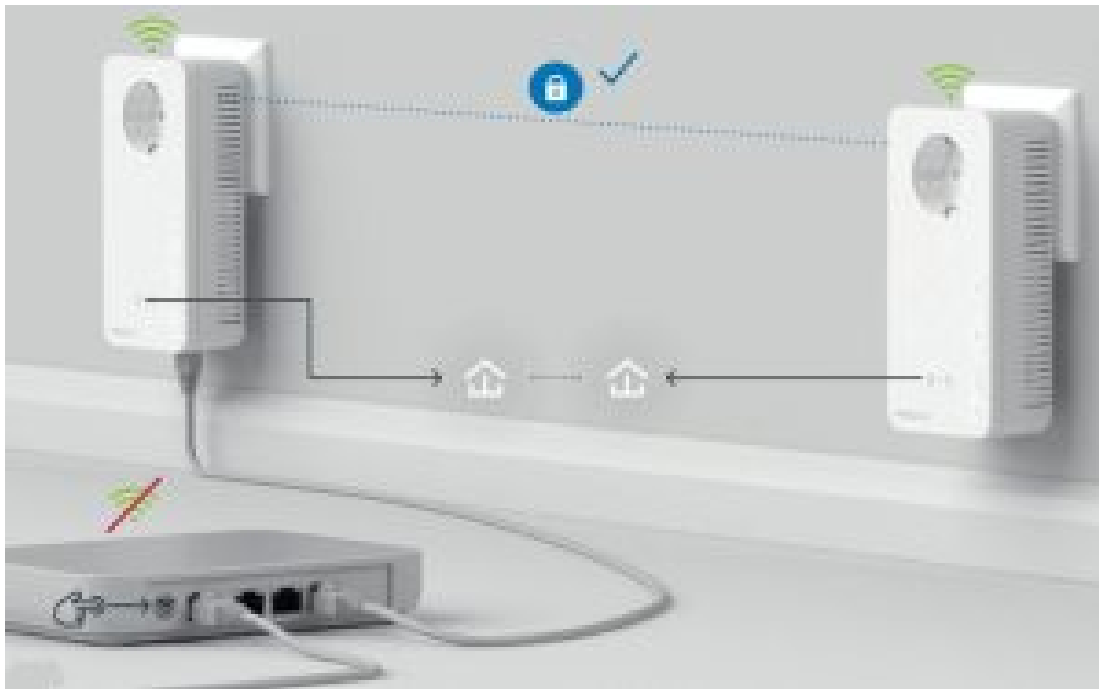




B7 devolo Magic 2 WiFi 6

All devolo Magic 2 WiFi 6 devices now form a joint Mesh Wi-Fi network. You can now put the adapters in whatever locations you choose.



PLC button 

Duration of the button press	Action	LED behavior
1 second	Start pairing with other devolo adapters	Flashes white
> 10 seconds	Reset devolo adapter to factory settings	Lights up red
PLC LED 	The devolo Magic 2 WiFi 6 adapter ...	LED behavior
	... is working perfectly. It is connected to other devolo adapters.	Lights up white
	... is currently establishing a pairing connection with another adapter.	Quickly flashes white
	... is not connected to the network*	Flashes red
	... is in standby mode.	Slowly flashes white
	... is currently undergoing a software update.	Alternately flashes white and red
	... has a poor Powerline connection.	Lights up white and then briefly flashes red
	... is currently in the start-up process. ... cannot see any other devolo adapters.	Lights up red
	... no longer has any LED function since it was disabled by the user.	None


Wi-Fi button 		
Duration of the button press	Action	LED behavior
1 second	WPS function is being carried out	Flashes white
> 3 seconds	Wi-Fi is being switched off	LED goes out
Wi-Fi LED 	The devolo Magic 2 WiFi 6 adapter ...	LED behavior
	... has a fault-free connection to the Internet.	Lights up white
	... is attempting to establish a connection via WPS.	Flashes white
	... no longer has any LED function since it was disabled by the user.	Off


* On page 35 you will see how to carry out manual pairing.

Help: Manual Pairing

Help: If pairing during initial installation was unsuccessful, you can carry out the manual pairing of the adapters. Connect the devolo adapter to a free wall socket and wait until the LED flashes white (approx. 1 min.).



Press the  button on both devolo adapters within 3 minutes. Once all LEDs light up white, the pairing has been completed successfully.

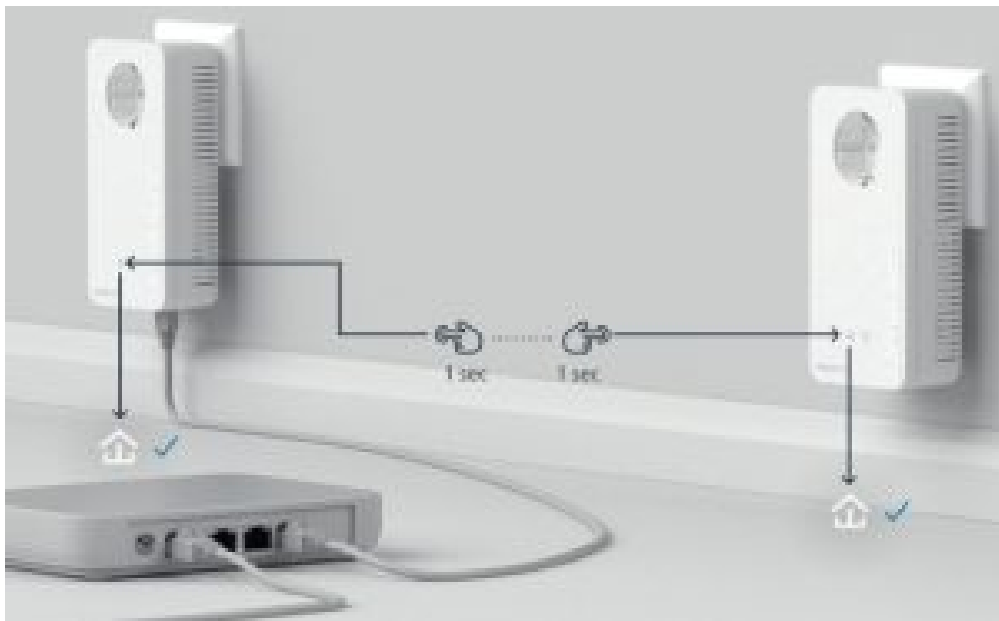

Support

UK
www.devolo.co.uk/support

Manual



www.devolo.global/support/downloads

Warranty: 3 years

If your devolo device is found to be defective during initial installation or within the warranty period, please contact the vendor who sold you the product. The vendor will take care of the repair or warranty claim for you. The complete warranty conditions can be found at www.devolo.com/warranty.



devolo

devolo AG · Charlottenburger Allee 67 · 52068 Aachen · Germany

www.devolo.global

40315/1121

Documents / Resources

	devolo Magic 2 WiFi 6 Mesh Kit [pdf] Installation Guide 40315, Magic 2, WiFi 6 Mesh Kit, Magic 2 WiFi 6 Mesh Kit
	devolo Magic 2 WiFi 6 Mesh Kit [pdf] Installation Guide Magic 2, WiFi 6 Mesh Kit, Magic 2 WiFi 6 Mesh Kit, Mesh Kit