



DT Research Control Center for Rugged Handheld Tablet User Guide

[Home](#) » [DT Research](#) » DT Research Control Center for Rugged Handheld Tablet User Guide

DT Research Control Center for Rugged Handheld Tablet




Contents [[hide](#)]

- [1 Introduction](#)
- [2 Access to Control Center from the Windows Desktop](#)
- [3 Module Function Settings](#)
- [4 More Settings](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

Introduction

The Control Center is the central portal to access major system modules and settings. Authorized users can enable/disable radios (Wi-Fi or optional WWAN) and/or optional modules. All users can change the settings for all modules to adjust the LCD brightness, screen orientation, and touch modes based on where and how the tablet is being used so it benefits the end users the most.

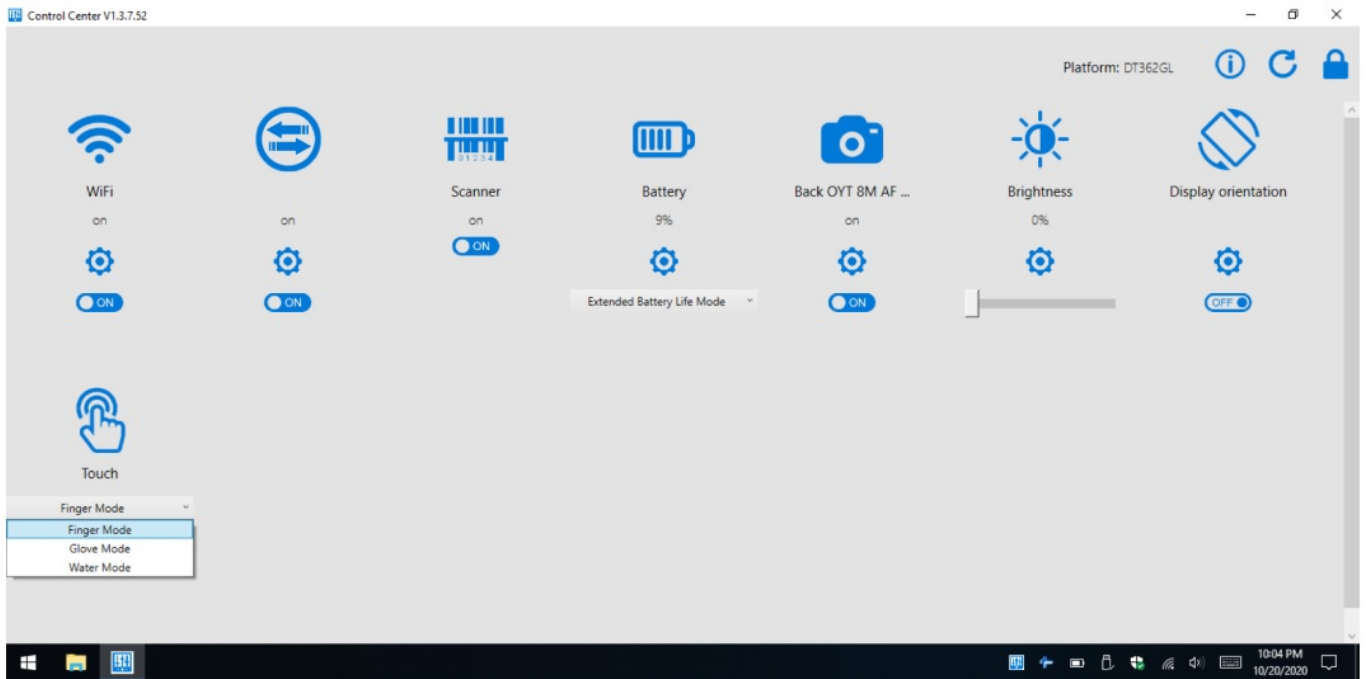
Access to Control Center from the Windows Desktop


The Control Center application can be launched from the Windows System Tray. Tap  icon to launch the software.

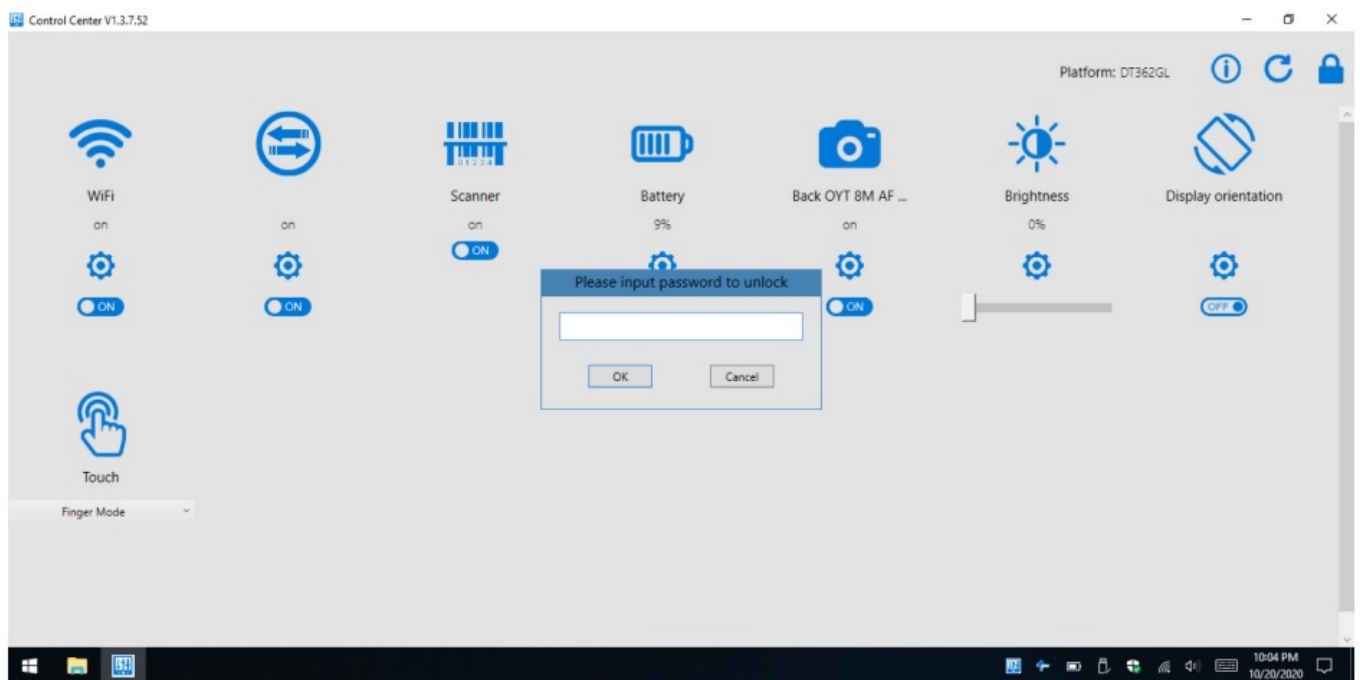


Once the application is launched, the Control Center runs under Normal User Mode. Under this mode, you cannot turn on/off the modules, like Wireless, Camera, and Barcode Scanner. You will see the module and settings icons below.

NOTE: The module icon(s) will be displayed only when there is/are related module(s) installed on your tablet.



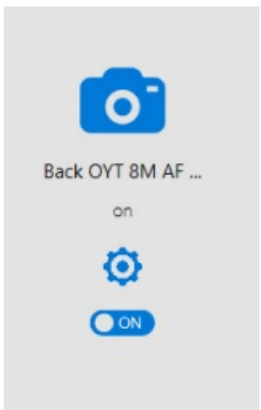

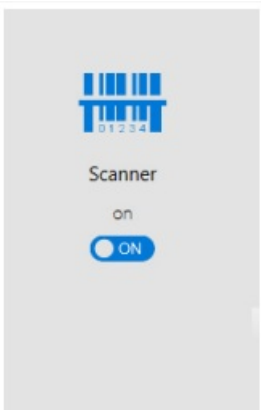

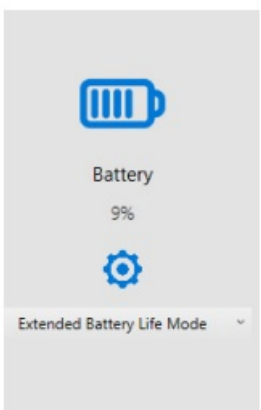



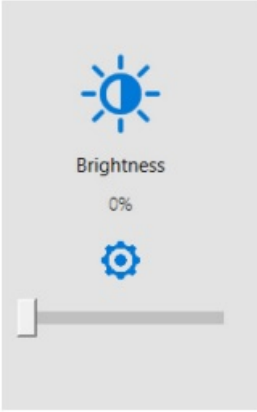
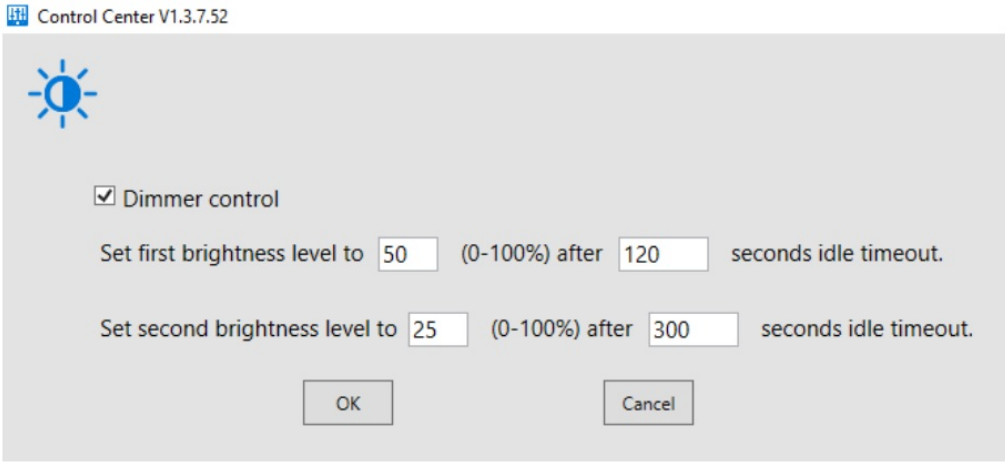
To access the Authorized User Mode, click on the lock icon  on the top right corner of the application window, then a dialogue window opens for the authorized user to enter the password. The default password is P@ssw0rd.

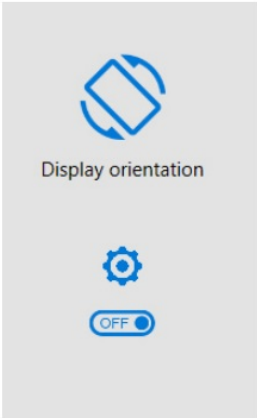
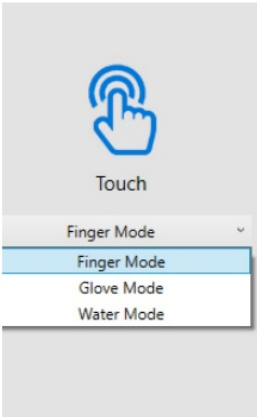


The module and settings icons will be shown as below; same as Normal User Mode.


Module Function Settings


	<p>Tap the On/Off button to enable or disable the WLAN connection.*</p> <p>Tap  to enter the Microsoft Windows Settings for the advanced adjustment.</p>
	<p>Tap the On/Off button to enable or disable the Back Camera module. *</p> <p>Tap  to enter the Microsoft Windows Settings for the advanced adjustment.</p>
	<p>Tap the On/Off button to enable or disable the Barcode Scanner module.*</p> <p>Tap  to enter the Microsoft Windows Settings for the advanced adjustment.</p>
	<p>The drop-down menu allows users to quickly switch the power modes of the tablet. Select Max Battery Performance Mode to enable the system performance, and to save the system power, select Extended Battery Life Mode.</p> <p>Max Performance Mode: to charge the battery pack(s) to full design capacity.</p> <p>Extended Battery Life Mode: to charge the battery pack(s) to 80% design capacity to extend the lifespan.</p> <p>NOTE: By default, the setting is Extended Battery Life Mode.</p> <p>Tap  to enter the Microsoft Windows Settings for the advanced adjustment.</p>


	<p>Slide the bar to adjust the screen brightness, supports 0% to 100%. Tap to enter Dimmer Control.</p> 
--	---

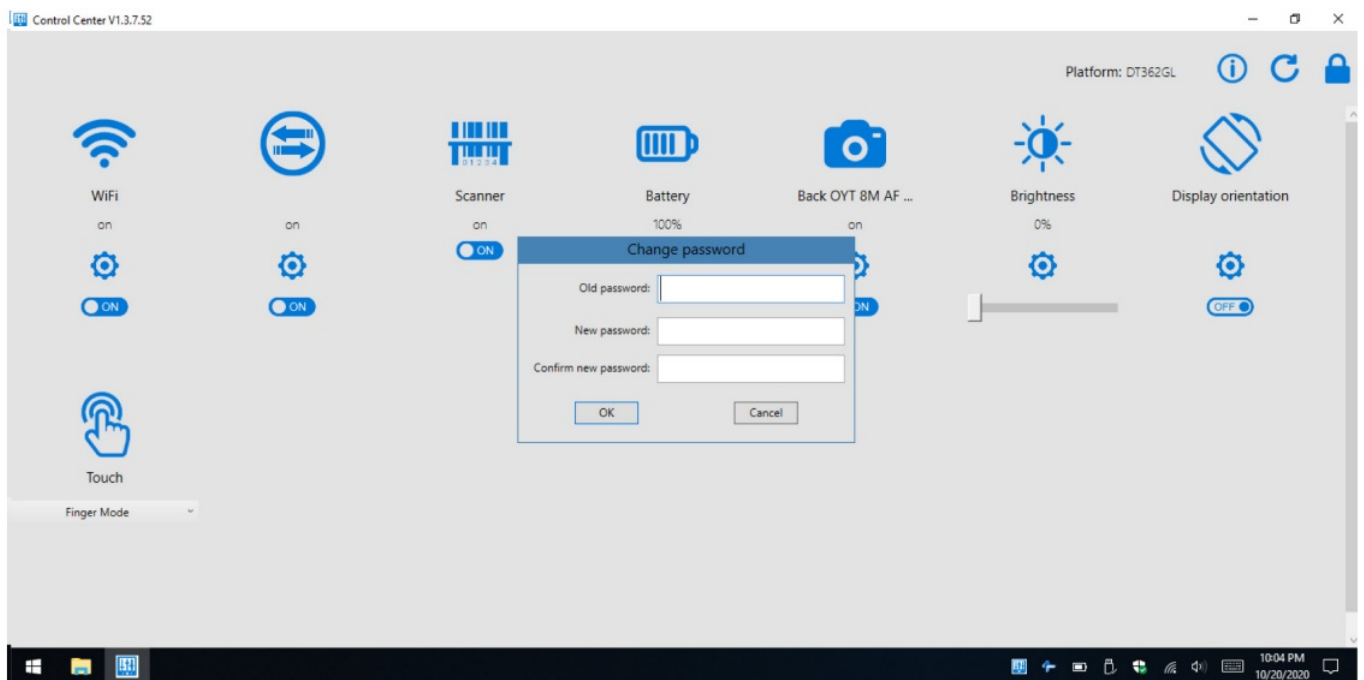
	<p>Tap the On/Off button to enable or disable the WLAN connection.*</p> <p>Tap to enter the Microsoft Windows Settings for the advanced adjustment.</p>
	<p>Tap the On/Off button to enable or disable the Back Camera module. *</p> <p>Tap to enter the Microsoft Windows Settings for the advanced adjustment.</p>

More Settings

After setting up, the authorized user is allowed to exit the authorized user mode by tapping  .

The Control Center will automatically refresh the module status. To manually refresh the module status, tap  .


To change the authorized user password, tap  and a dialogue window opens. Enter the current password, then the new password. Tap OK to save the settings.



DT Research, Inc.
2000 Concourse Drive, San Jose, CA 95131
Copyright © 2021, DT Research, Inc. All Rights Reserved.



Documents / Resources

	<p>DT Research Control Center for Rugged Handheld Tablet [pdf] User Guide Control Center for Rugged Handheld Tablet, Control Center, Rugged Handheld Tablet Control C enter, Handheld Tablet Control Center, Tablet Control Center, Control Center</p>
---	--