



JASMINER X16-Q One Click Connection Via Mobile Phone



JASMINER X16-Q One Click Connection Via Mobile Phone Instructions


[Home](#) » [JASMINER](#) » JASMINER X16-Q One Click Connection Via Mobile Phone Instructions 

Contents

- [1 JASMINER X16-Q One Click Connection Via Mobile Phone](#)
- [2 Product Usage Instructions](#)
- [3 Instructions](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)
- [5 Related Posts](#)



JASMINER X16-Q One Click Connection Via Mobile Phone

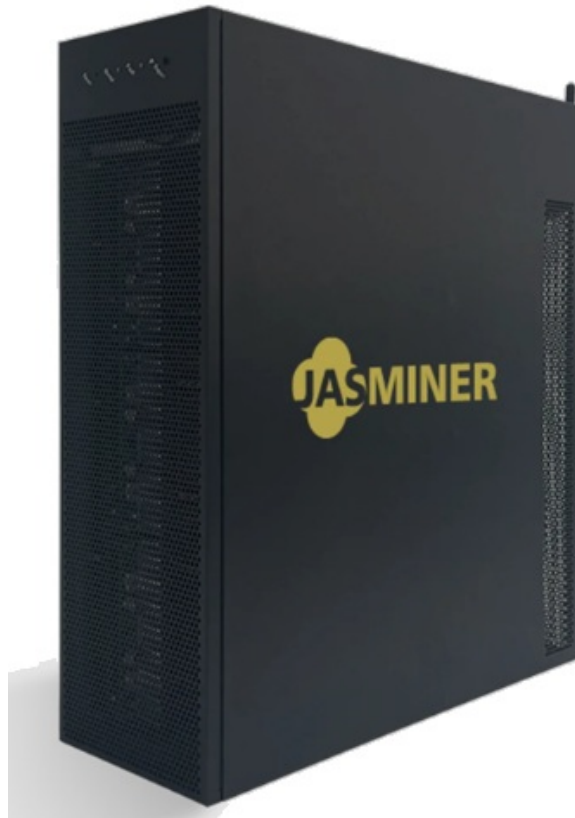

Specifications

- Product: JASMINER X16-Q
- Connectivity: Wi-Fi
- Default Username/Password: root/root

Product Usage Instructions

Step 1: Powering On and Connecting to AP

1. Connect the device to power.
2. Wait for red and green status lights to flash simultaneously indicating AP mode.
3. Connect to Wi-Fi network named 'jasminer_ap'.

Step 2: Logging into Backend Configuration Page

1. Scan QR code or enter IP address (83.85.78.1) in a mobile browser.
2. Use default username and password: root/root.
3. Submit details and access the configuration page.

Step 3: Connecting to a Wi-Fi Network

1. Access the Wi-Fi configuration interface.
2. Activate Wi-Fi function and search for available networks.
3. Select SSID, enter password, and click 'Connection' button.

Step 4: Configuring JASMINER Network and Scanning Devices

1. Scan QR code or visit <http://find.jasminer.com> on mobile browser.
2. Click 'Add' to create a new configuration.
3. Enter IP address range of JASMINER device's network and click 'Save'.


Frequently Asked Questions (FAQ)

- **Q: How can I reset the device if needed?**

- A: You can reset the device by pressing the reset button for X seconds until the status lights indicate the reset process has started. Follow the initial setup steps after resetting.

- **Q: How do I update the firmware version?**

- A: To update the firmware, visit the JASMINER official website and download the latest version. Follow the instructions provided in the firmware update guide.

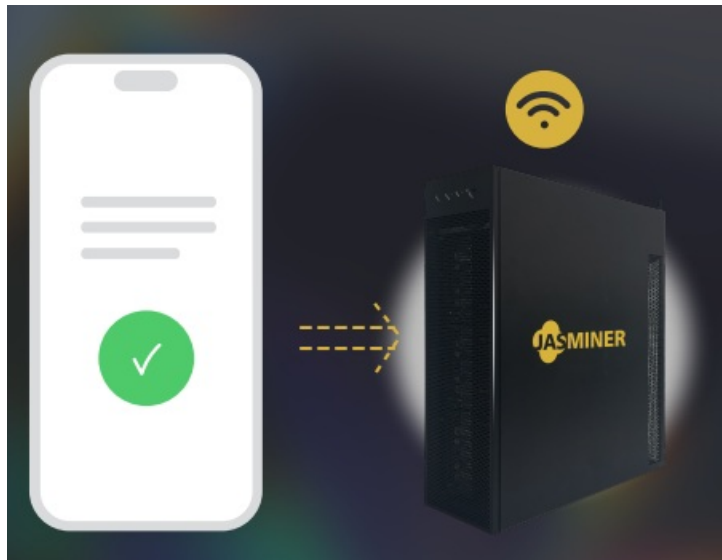


This tutorial aims to provide users with a step-by-step guide on how to effortlessly connect the JASMINER X16-Q series device to the mobile phone, enjoying an efficient and convenient network configuration experience. Before starting the configuration, please make sure to visit the JASMINER official website to download the latest firmware version

Instructions


Step 1: Powering On the Device and Connecting to the AP

Connect the new JASMINER X16-Q series device (or a reset device) to power. When the red and green status lights flash simultaneously, it indicates that Access Point (AP) mode has been activated.

Note: If the device detects a wired Ethernet connection, the AP (Access Point) mode will automatically turn off. Once the Ethernet cable is unplugged, the AP mode will automatically turn on again

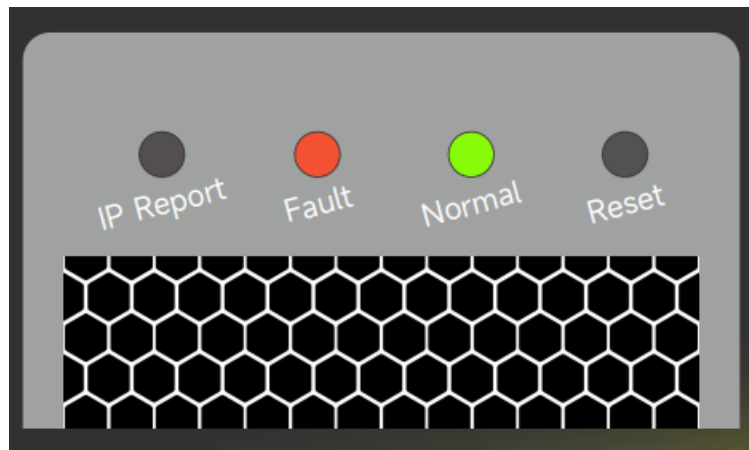


Connecting with a Wi-Fi network named “jasminer_ap” in the list. This will enable users to access the device for configuration through the AP network.

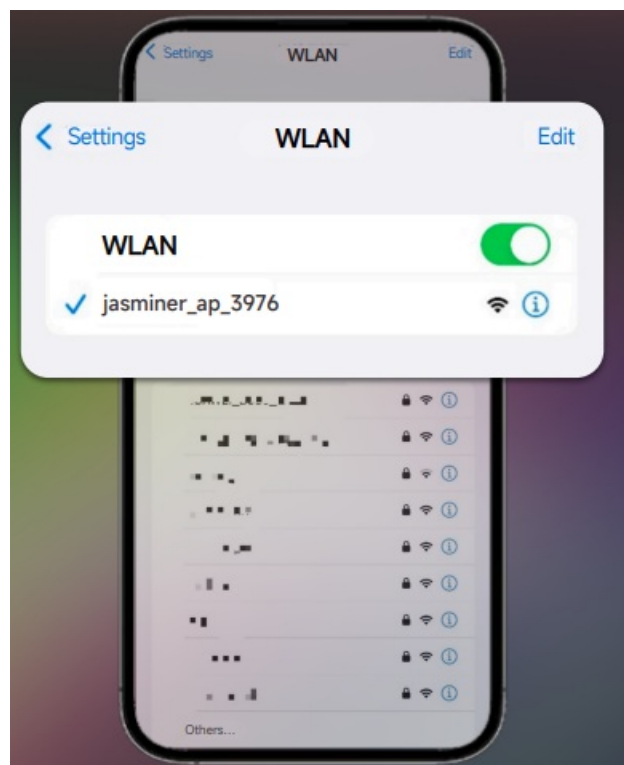


Step 2: Logging into the Backend Configuration Page


- Using a mobile browser (preferably Google Chrome), scan the QR code below or the QR code on the JASMINER X16-Q device. You can also enter 83.85.78.1 to access the configuration page.

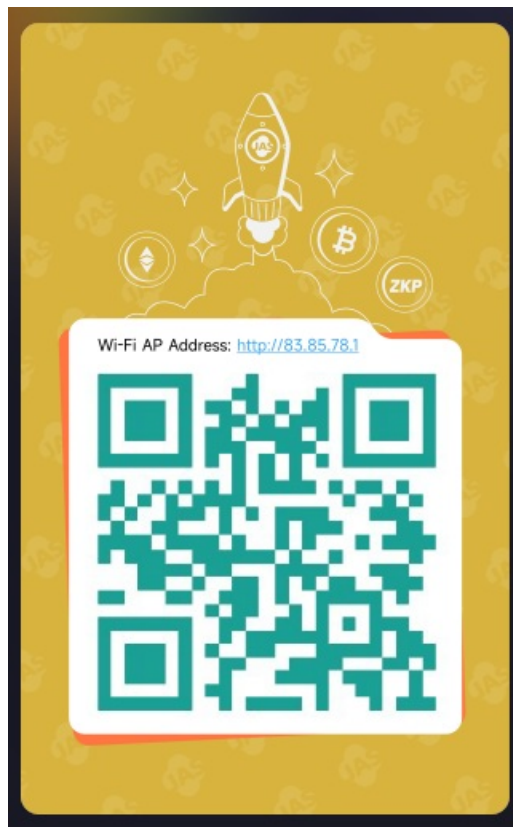

- When logging in for the first time, please enter the default username and password: root/root.

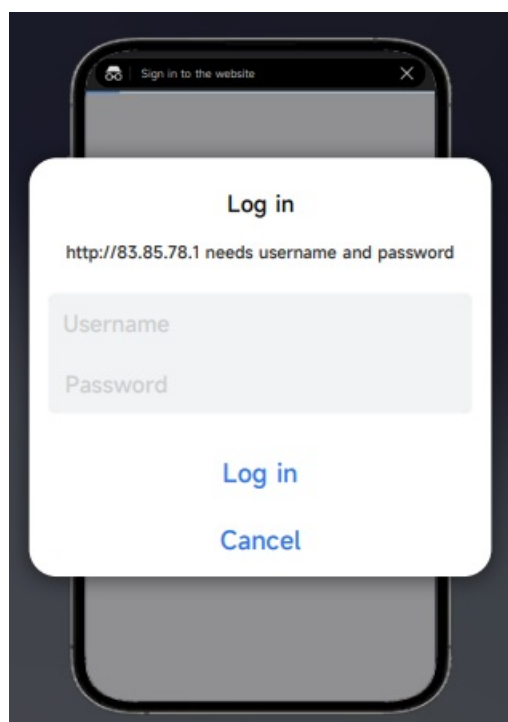


- Enter the required details and tap the "Submit" button on the configuration page. If successful, a notification will appear and you will be automatically redirected to the Wi-Fi configuration page.

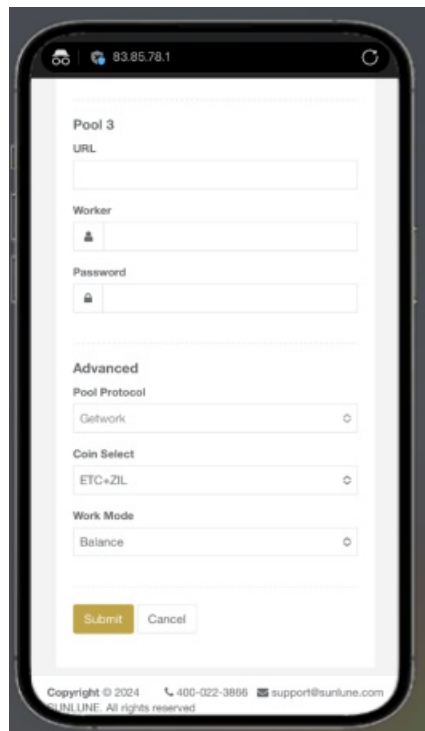


Step 3: Connecting to a Wi-Fi Network


- After accessing the web backend, click the yellow button to the right of the JASMINER logo and select the “WLAN” option to enter the device’s WiFi configuration interface. Tap the “Switch” button to activate the Wi-Fi function. The device will automatically search for available Wi-Fi networks after activated. If you need to update the list of available networks, please tap the “Refresh” button.

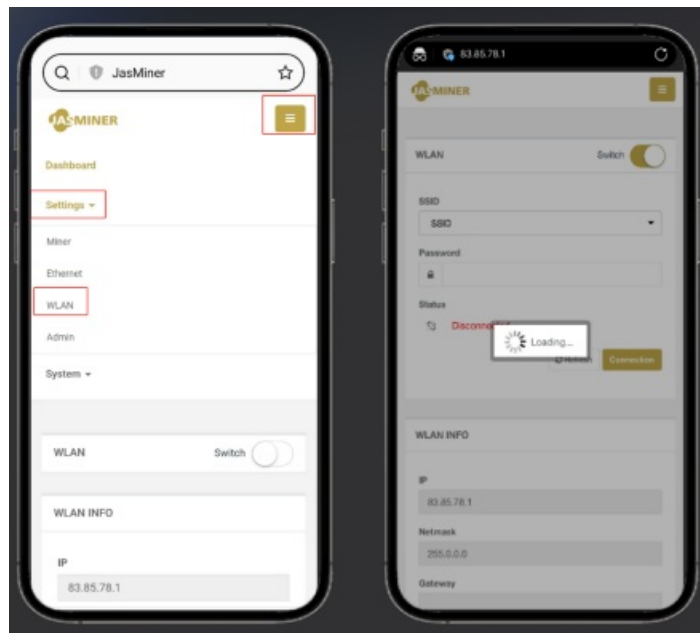

- To connect, click on the SSID from the list of networks you want to join, enter the corresponding password, and then click the “Connection” button to establish a secure Wi-Fi connection.

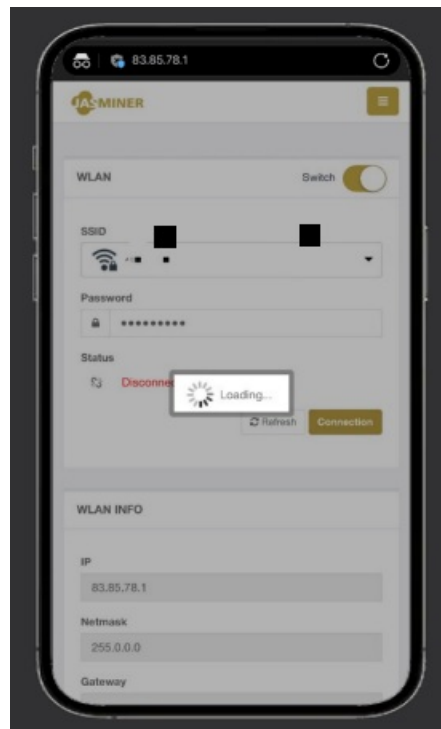

- Upon completing the network connection, a notification window will appear. The flashing green light on the device indicates a successful Wi-Fi connection and a stable mining pool connection.

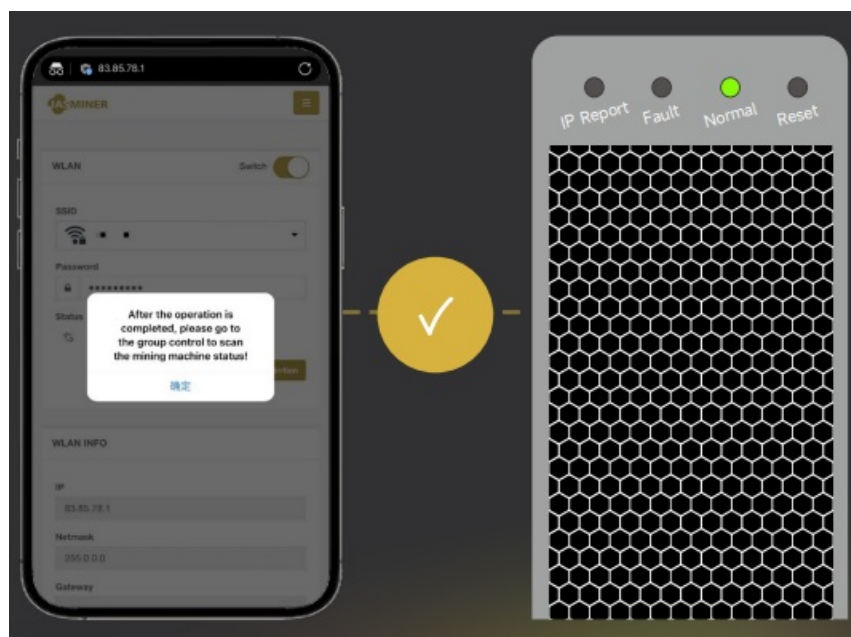


Step 4: Configuring JASMINER Network and Scanning Devices


- Scan the QR code below using your mobile browser (Google Chrome recommended) or visit <http://find.jasminer.com> to access the JASMINER network discovery page. Please note that the page may take some time to load on the first visit.




- If not yet configured, the Configuration tab will open by default. Click the “Add” button to create a new configuration.

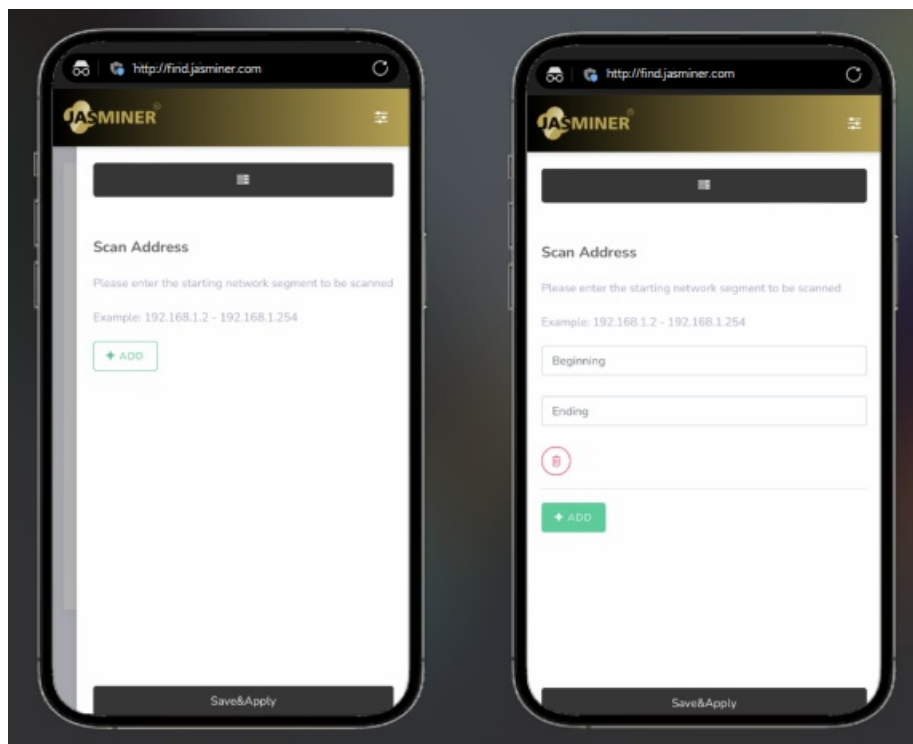

- Enter the IP address range of your JASMINER device’s network (ensure both the device and mobile phone are connected to the same local area network), and then click the “Save” button to apply the settings.

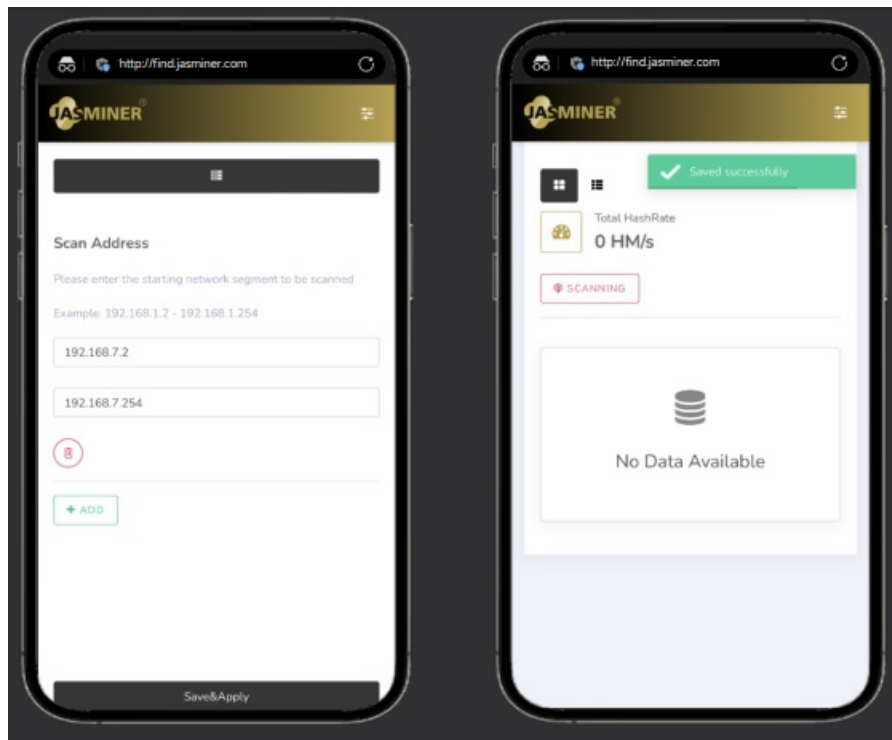

- Tap “SCANNING” to start finding devices. The icon above the Hashrate allows users to switch the display mode. By clicking on the image or IP address within the card, users can quickly switch to the corresponding device’s backend page.

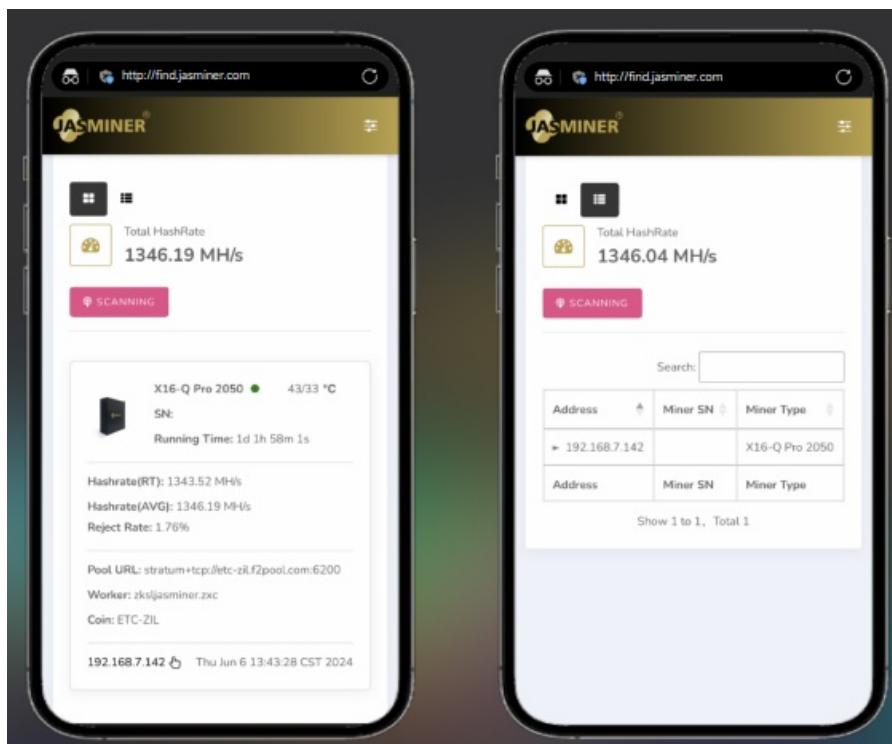

Congratulations!

You have completed the Wi-Fi setup for your JASMINER X16-Q series device. Now, you can easily check the device’s status via your mobile phone. If you encounter any difficulties during the setup process, please don’t hesitate to reach out to our customer service team for assistance. We are looking forward to your valuable feedback.



Documents / Resources

[JASMINER X16-Q One Click Connection Via Mobile Phone](#) [pdf] Instructions

X16-Q One Click Connection Via Mobile Phone, X16-Q, One Click Connection Via Mobile Phone, Connection Via Mobile Phone, Via Mobile Phone, Mobile Phone



References

- [🌐 Jasminer Network Discovery](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.