



KINHANK Super Console X2 PRO Retro Game Console User Manual

[Home](#) » [KINHANK](#) » KINHANK Super Console X2 PRO Retro Game Console User Manual 

Contents

1 KINHANK Super Console X2 PRO User Manual

- 1.1 Product Information
- 1.2 Product Features
- 1.3 Packing List
- 1.4 Highlights of Latest Upgrades
- 1.5 Precautions
- 1.6 System Startup and Shutdown
- 1.7 Common hotkey settings
- 1.8 More Settings
- 1.9 Adding Game Methods
- 1.10 Change Game Emulators
- 1.11 Q&A
- 1.12 Tutorial Videos

2 Documents / Resources

3 Related Posts

KINHANK Super Console X2 PRO User Manual



Model	Super Console X2 PRO	Dual System	Game & TV
CPU	Amlogic S905X2	RAM	2GB DDR4
GPU	Mail-G31 MP2	ROM	8GB FALSH
DC Power	12V/2A	Bluetooth	BT5.0
WiFi	2.4G/5G	Language	Multi-languages

Product Information

Product size: 10cm*10cm*2cm

Product weight: 190g

Support HDMI-compatible

Support 2.4G/5G WiFi. 10/100M LAN

Support Download games

Support Multi-language

Three System: EmuELEC4.5 + Android 9.0 + CoreELEC

Product Features

- Mini size, retro design, palm size, can be put in the pocket, it's the best choice for family, travel, party, corporate entertainment.
- Equipped with upgraded S905X2 chip, Amlogic Quad Core ARM Cortex-A53 CPU, 4-core processor, main frequency 1.8GHz. Powerful GPU: Mail-G31 MP2, support Sega Saturn.
- Three systems in one, EmuELEC 4.5 game system + Android 9.0 + CoreELEC audio and video system
- There are 64G/128G/256G three specifications, respectively pre-installed 80000+/86000/100000+ retro games
- Support more than 60+ emulators, such as PSP, DC, PS1, Sega Saturn, N64, NEOGEO, MAME etc.
- 2G DDR4 RAM + 8G ROM. Compared with DDR3, DDR4 RAM runs faster.
- 2.4G/5G WiFi, 10/100M LAN, BT5.0
- HDMI-compatible, Android supports 4K@60fps HD output, EmuE supports 1080p HD output, it can be connected to display screens, projectors, TVs and other equipment, the big screen is clearer.
- Game Console and TV dual system, support to connect to WIFI, Youtube online TV, movies, online access to information, support Google play to add applications

- The heat dissipation hole design on the back of the machine makes the heat dissipation more even.
- Equipped with two wireless controllers, you can play with friends and family at anytime.
- Open Linux source system, suitable for DIY. For the specific method of downloading the game, please refer to the instructions or consult our customer service.

Packing List

1* SURPER CONSOLE X2 PRO
 1*TF Card
 1*4G TF Card
 2* Controller
 1*TV Remote Control
 1*Power Adapter
 1* HD Cable
 1*User Manual

Highlights of Latest Upgrades

1. 4-core processor, main frequency 1.8GHz, Mail-G31 MP2, support running Sega Saturn, smooth running PSP.PS1, DC, MAME, etc.
2. 2G DDR4 memory, running faster
3. Three Systems in one console.

- ① EmuELEC 4.5 Game system
- ② Android 9.0 OS
- ③ CoreELEC AV system

About system switching

Game system to TV system:

Press the Gamepad “Start” Button—Choose the “Quit”—“Reboot From NAND”—“YES”

TV system to game system:

My Application>>LiberELEC>>OK>>Allow (started once, if it is not changed to TV system, the next time it is started, it will automatically enter the game system)

How to switch CoreELEC systems


Insert 4G Card→Turn on the power

Precautions

- Do not store the machine in a dusty, humid, high temperature and strong magnetic environment.
- It is forbidden to use in high temperature and high humidity environment (this product is not waterproof).
- When you carry this machine out, participate in high-intensity sports such as running, climbing, etc., please fix the machine firmly on your body or backpack to avoid damage caused by falling from a height or squeezing

heavy objects.

- When the power adapter is fully charged, please do not touch the power video unit with wet hands to prevent electric shock.
- Some games of this product contain violent scenes, please be careful with children before using them. Parents are also requested to do a good job of supervising their children and not to indulge for a long time.
- Do not disassemble the machine without authorization.

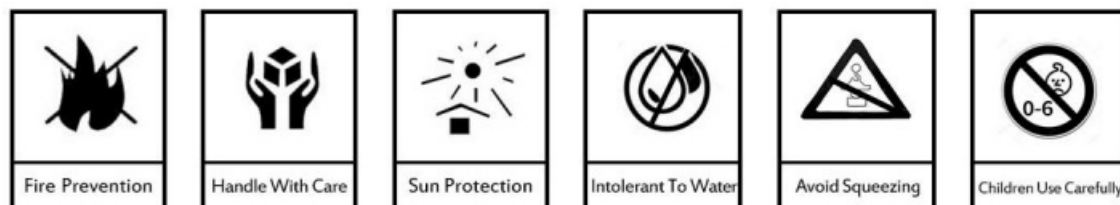

System Startup and Shutdown

1. System Startup: Press the power button to start the system.
2. Shut Down: Press SELECT—>>SHUTDOWN SYSTEM (software shutdown protection system), and then cut off the power.

Common hotkey settings


Left/right cross keys and joystick	Switch emulator platform
B key (right side function key)	Enter or confirm
A key (lower function key)	Return or cancel
START Key	Set up
SELECT Key	Soft restart or soft shutdown setting
L2/R2	Game menu page flip
Select + Start(press twice)	Quite Game (Quite game's hotkeys are available throughout the system, but most of the other hotkeys only work when using the retroarch core.)
L3 + R3	Menu Toggle Controller Combo
Select + L1	Load State
Select + R1	Save State
Select + B	Reset Game


More Settings

1. Language Setting

System Settings-Language

START—>>SYSTEM SETTINGS—>>LANGUAGE

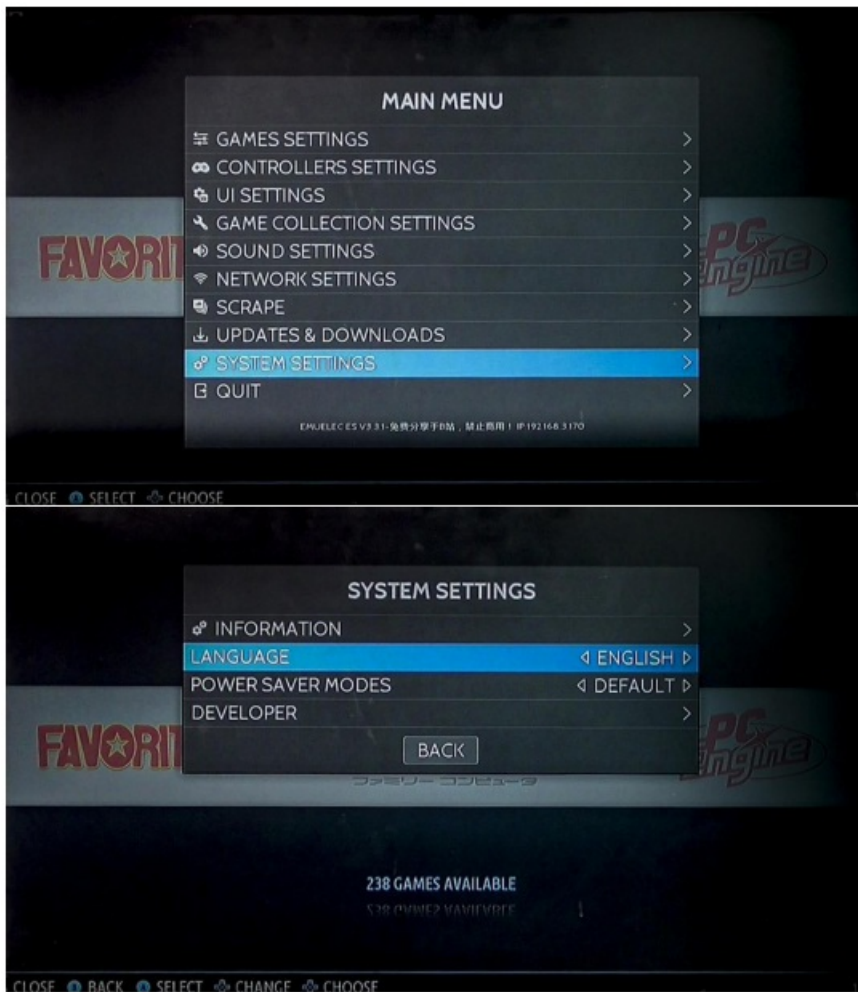

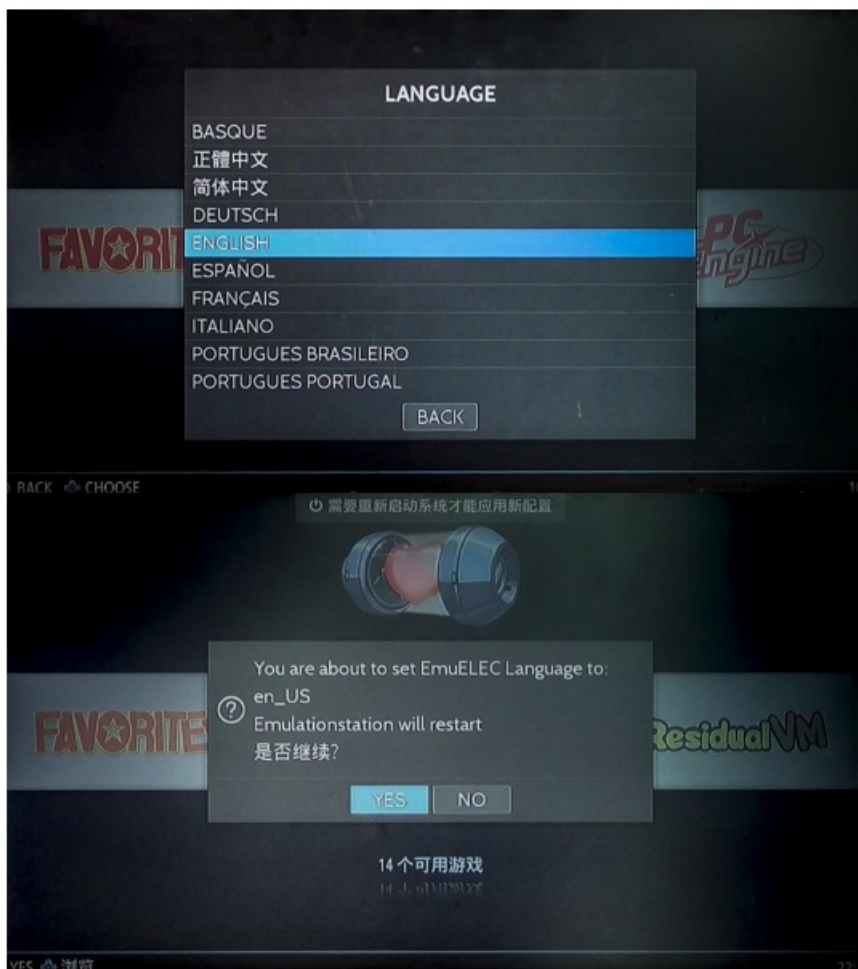

2. Controller Button Setting

After the USB interface is connected to the handle, press the handle B (OK) button to enter the handle button setting.

MAIN MENU

- EMUELEC SETTINGS >
- GAMES SETTINGS >
- CONTROLLERS SETTINGS >**
- UI SETTINGS >
- GAME COLLECTION SETTINGS >
- SOUND SETTINGS >
- NETWORK SETTINGS >
- SCRAPE >
- UPDATES & DOWNLOADS >
- SYSTEM SETTINGS >

EMUELEC ES V3.31 - 免費分享于06, 禁止商用 | IP:192.168.3.170

CLOSE SELECT CHOOSE

10


CONTROLLERS SETTINGS

YOU ARE GOING TO CONFIGURE A CONTROLLER. IF YOU HAVE ONLY ONE JOYSTICK, CONFIGURE THE DIRECTIONS KEYS AND SKIP JOYSTICK CONFIG BY HOLDING A BUTTON. IF YOU DO NOT HAVE A SPECIAL KEY FOR HOTKEY, CHOOSE THE SELECT BUTTON. SKIP ALL BUTTONS YOU DO NOT HAVE BY HOLDING A KEY. BUTTONS NAMES ARE BASED ON THE SNES CONTROLLER.

OK


OK CHOOSE CHOOSE



10

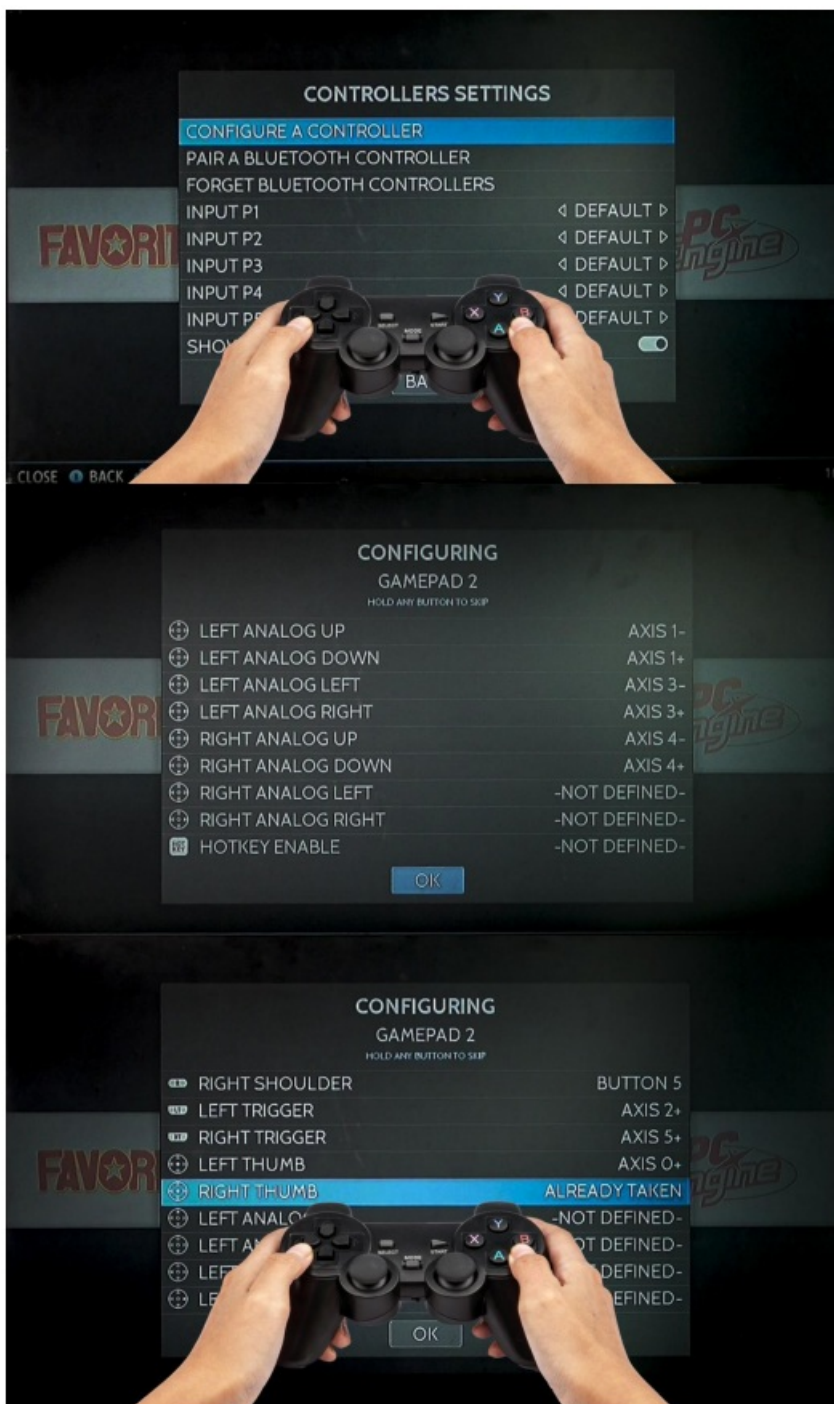

3. WIFI Connection

START—>>NETWORK SETTINGS—>>ENABLE WIFI, then select the wifi network as required and fill in the password;

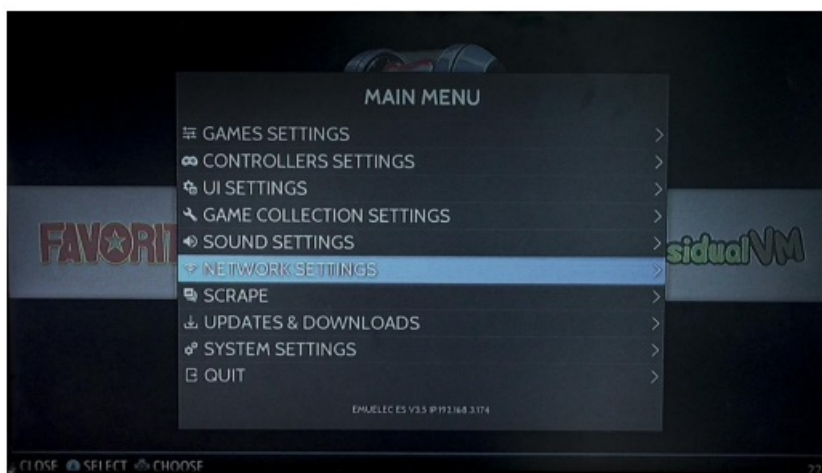

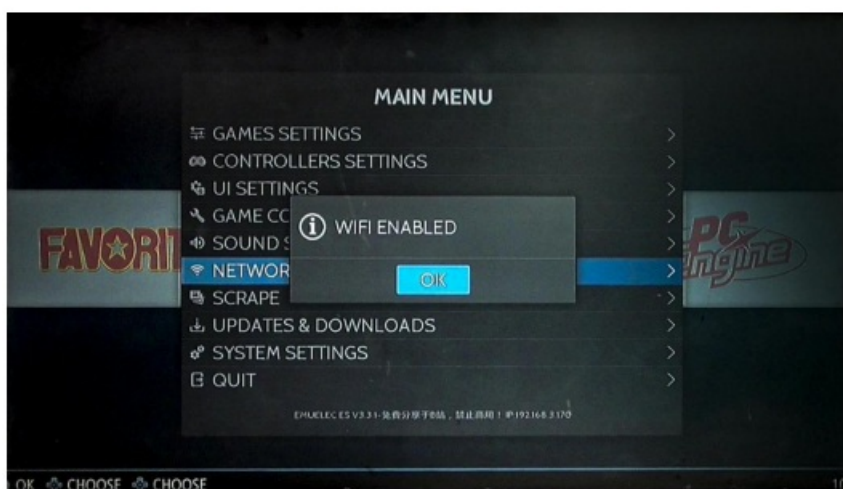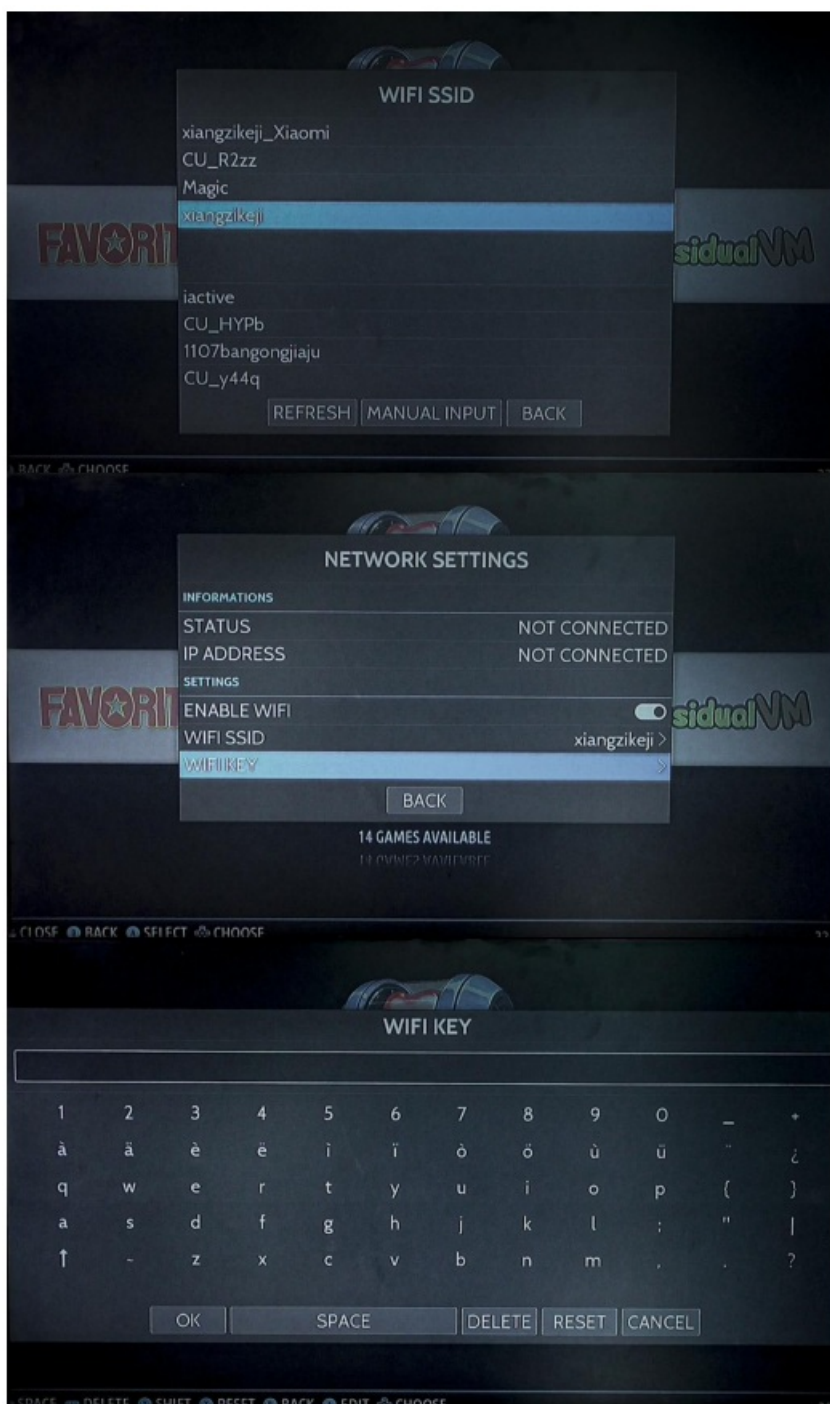

Adding Game Methods

There are many ways to copy games:

The First Type: (compatible with multiple win systems)

Insert the game console memory card into the computer and use DiskGenius software:

1. Open DiskGenius, make sure DiskGenius has recognized the memory card;
2. Find the rom folder and put the game in the corresponding folder ;
3. Drag the game that needs to be placed directly into the corresponding folder ;
4. Safe pop-up after transmission.

The Second Type:



The second way, if you use the memory card equipped with the game console, you can directly insert it into the win10 computer,

find the data mobile hard disk, and directly copy the game to the corresponding emulator in the roms folder.


The Third Type: (network connection)

1. Please connect the device to the network first.

View the IP address of the device

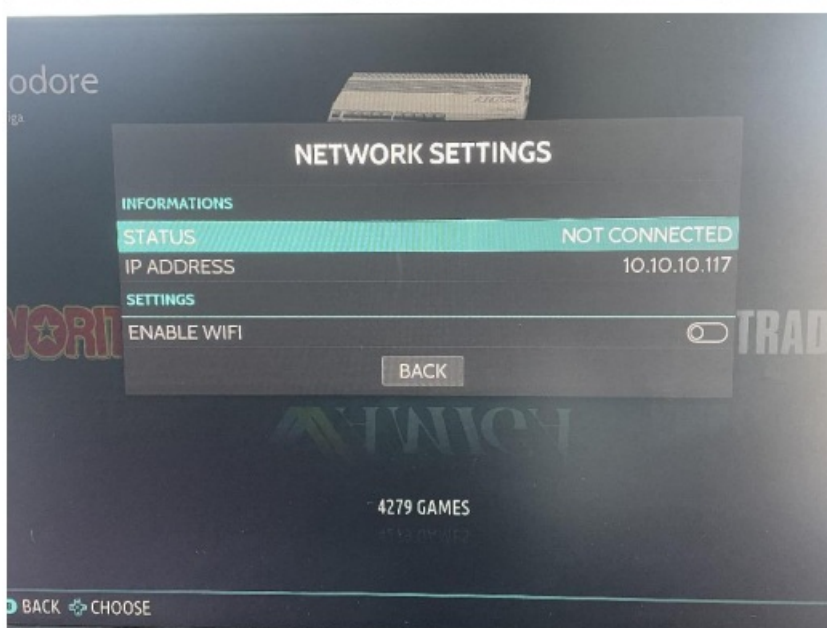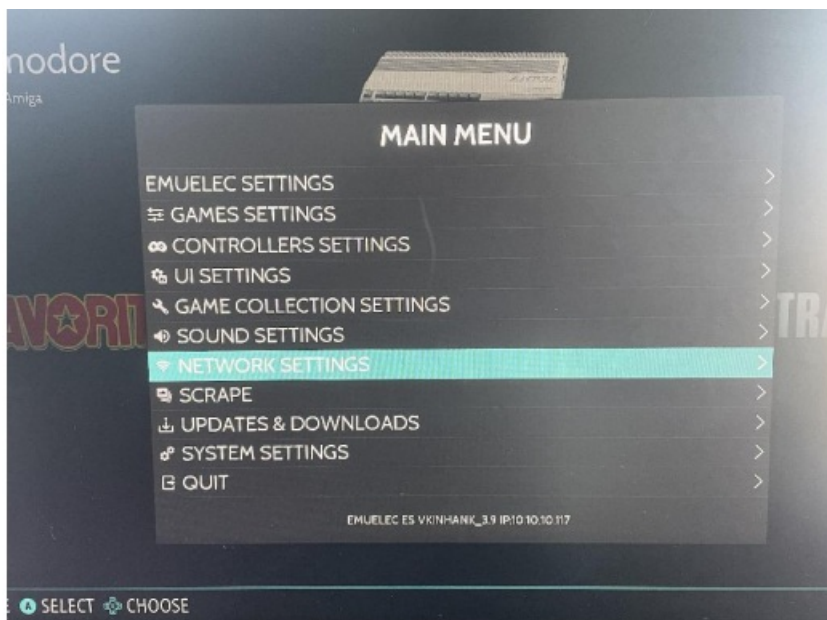

In the example below, the IP address is: 10.10.10.117 In the computer resource manager, enter \\10.10.10.117 and press Enter.

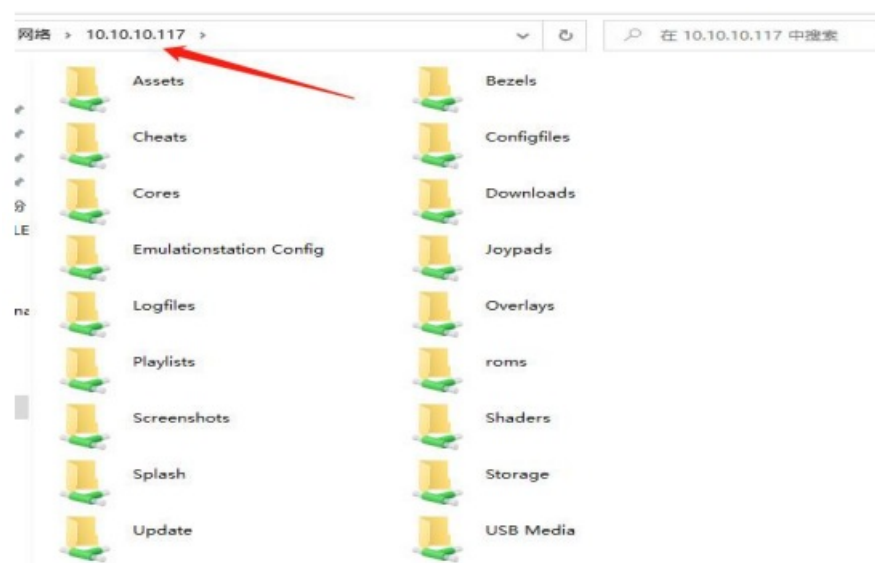


If prompted to enter a user name and password, the default user name: root, password: emuelec.

2. Open the Storage/Roms Folder:

You can see many sub folders, each of which corresponds to a simulator game, and the corresponding game

needs to be placed in the corresponding folder to be correctly identified

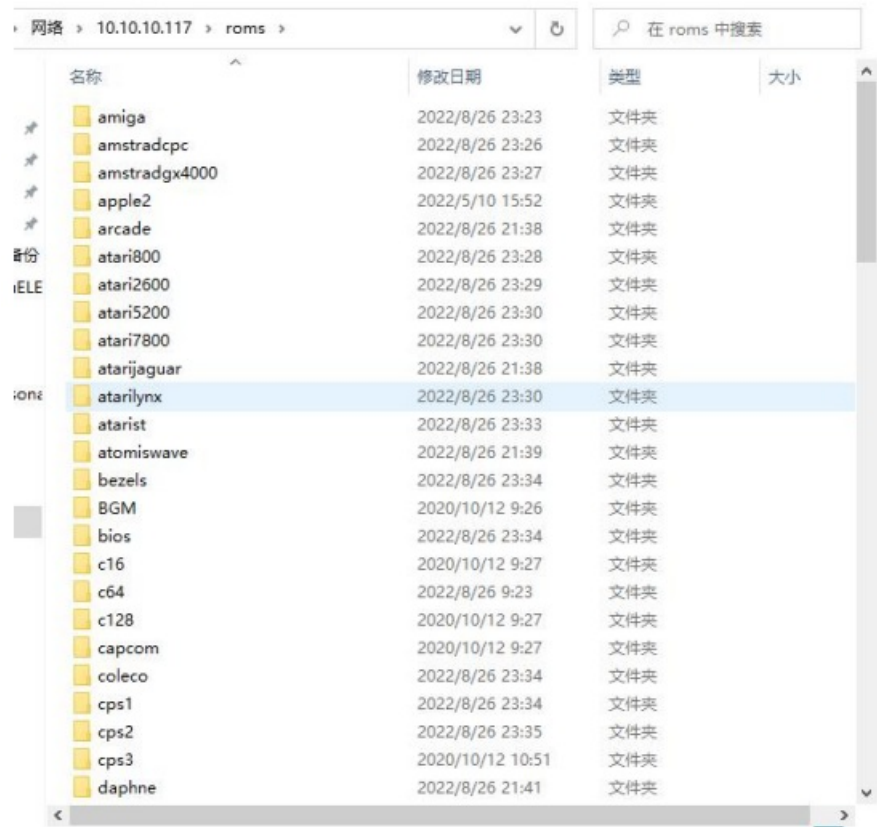

3. Example of the folder list corresponding to the emulator:



Arcade-FBA format	roms\arcade\fba
Arcade-MAME format	roms\arcade\mame2003
SNES	roms\nes
PSP	roms\psp
PS1	roms\psx
NES/FC	roms\nes
...	...

Note: The system distinguishes games by folder name, do not modify any directory structure, just copy the game files to the folder of the corresponding emulator.

Change Game Emulators

There may be multiple emulator files. If individual games cannot be opened or you want to try the effects of other emulators, please use the following methods to change the emulator:

Select the game you want to change the emulator—>>Long press the B key—>>Game settings menu —>>Advanced Game Options —>> Emulator—>>Choose the right emulator

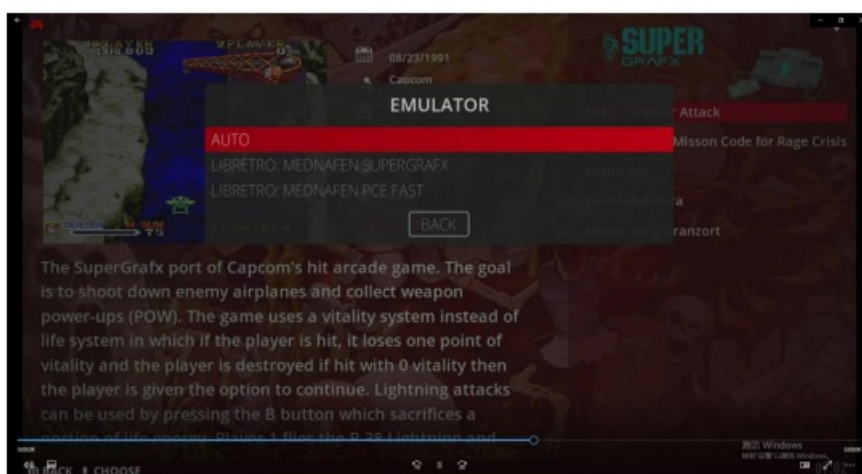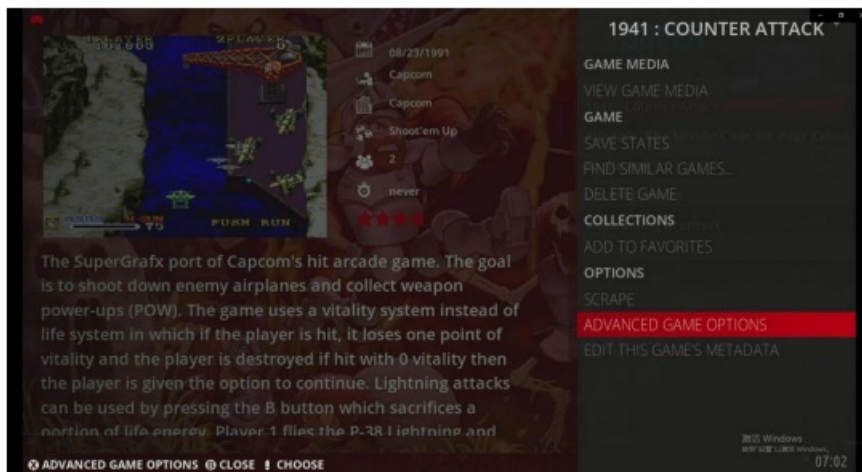

Q&A

Can I change the resolution?

The resolution of the game system is adaptive, do not change the resolution of the game system.

Can I add games by myself?

SUPER CONSOLE X2 Pro uses an open source Linux system and supports adding games by itself.

I changed some settings in EmuELEC and it's now not working, what should I do?

There are tons of advance settings in EmuELEC, changing it may cause your console not working properly so we highly recommend not to do so. However, as long as the game card is not formatted, you can always recover everything. Just talk to our staff and they are more than happy to help fix your issue. Besides our YouTube channel, Google will always be your best friend. Simple Google your issue with EmuELEC as a suffix keyword, you

will find lots of useful guides and fix.

Tutorial Videos

Our YouTube channel has a lots of useful tutorial videos as well, scan the QR code below to take a look.



FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm distance between the radiator and your body: Use only the supplied antenna.

Documents / Resources

	<p>KINHANK Super Console X2 PRO Retro Game Console [pdf] User Manual X2PRO, 2A9VX-X2PRO, 2A9VXX2PRO, Super Console X2 PRO Retro Game Console, Super Console X2 PRO, Retro Game Console, Game Console, Console</p>
---	---

