
Specifications SF-SCN43




Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.

Scion 43" Electric Fireplace

MODEL	WIDTH		HEIGHT		DEPTH		VIEWING AREA	Γ
	Actual (A)	Framing	Actual (B)	Framing	Actual (C)	Framing	(E x D)	
SF-SCN43	44-1/2" [1130]	45" [1143]	24-1/16" [611]	24-1/4" [616]	7-1/2" [193]	7-5/8" [194]	41-1/2" x 16-3/8" [1054 x 415]	

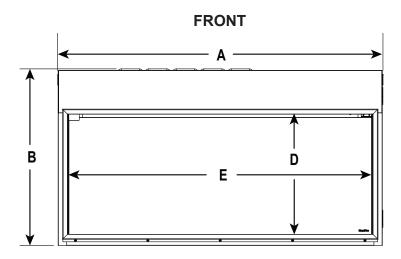



NOTE: A & B dimensions include louver projection on sides and top panels.

ELECTRICAL CONNECTION REQUIREMENTS


CIRCUIT	CONNECTION METHOD	BTUS
15 AMP, 120V/60 Hz/1400W	Hardwire only	5,000
20 AMP, 240V/60 Hz/2800W	Hardwire only	10,000

Specifications SF-SCN43


MINIMUM CLEARANCES TO COMBUSTIBLES

AREA	CLEARANCES		
SIDES	O"		
FLOOR	O"		
TOP TO MANTEL	5/8"		
BACK	O"		
FRONT	36" [914]		


MANTEL PROJECTIONS

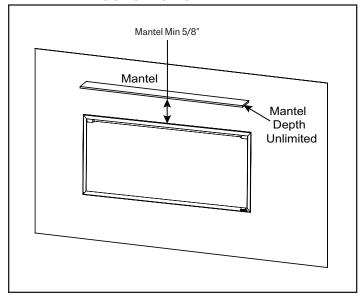

FINISHING DIMENSIONS

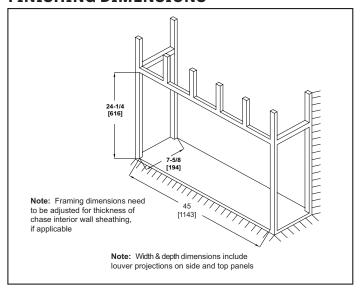

APPLIANCE LOCATION

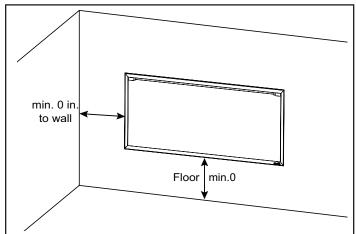

APPLIANCE CERTIFICATION

MODEL: SF-SCN43

LABORATORY: CSA International and Underwriters Laboratories, Inc (UL)

TYPE: Electric Air-Heaters; Fixed and Location-Dedicated Electric Room Heaters

STANDARD: CSA C22.2 No 46-13; UL 2021 (4th Edition)

Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.



