



4-Bay SAS Hard Drive Enclosure



User Manual

EC1003

Package Contents

- 4-Bay SAS Hard Drive Enclosure
- USB Cable
- Screw * 24
- Screwdriver * 1
- 12V Power Adapter
- User Manual

Interface Introduction

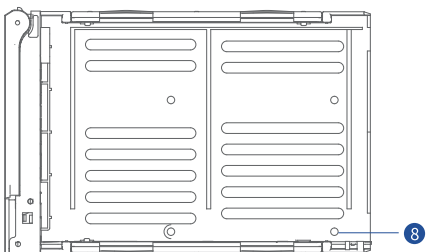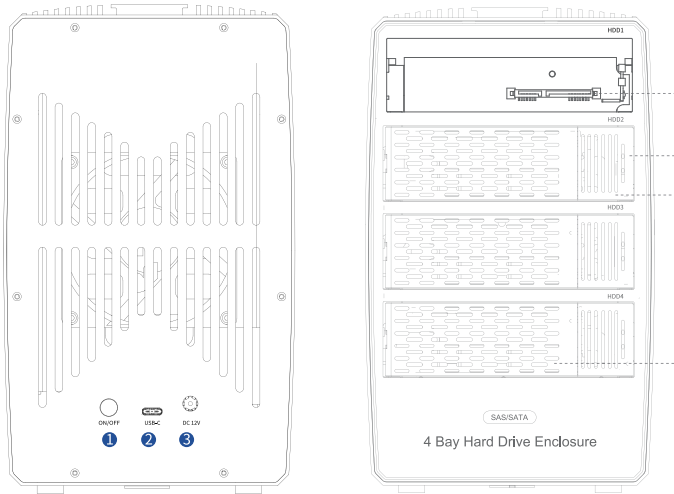

①	Power switch	Press to turn the product on and off
②	USB-C (5Gbps)	Data transfer interface, connecting to the server
③	Power supply 12V	Power interface to supply power to the product
④	Hard Disk Interface	SAS/SATA
⑤	Hard Disk Indicator	Displays the working status of each hard disk
⑥	Hard disk tray switch	Press the control hard drive tray handle to eject
⑦	Hard drive tray handle	Pull out the internal hard drive tray
⑧	Screw holes for securing 2.5-inch hard disks	Secure the 2.5-inch hard disk

Indicator description

Blue light on	Connecting power with hard disk access
Blue light flashing	Hard disk reading
The red light is steady on	Putting in a corrupted hard drive (only bad hard drives with working but unreadable disks)



Specification

Product	4-Bay SAS Hard Drive Enclosure		
Model	EC1003	Support expansion	72TB
Material	Aluminum	Support hard disk	SAS/SATA
Size	203*133*220MM		
Port	USB-C 3.0(5Gbps) 1*DC 12V ON/OFF		
System	Windows 7/10/11Mac OS10.2 above, Linux		



Installation Operation Guide

Hard disk installation and use

1. Press the hard disk tray opening key and pull out the hard disk tray handle.
2. Rotate to open the tray side fixing bar.





3. Insert the 3.5-inch hard disk, align it with the securing columns on both sides, and lock the hard disk.
4. Place the hard disk in the box with the tray.



Install a 2.5-inch hard disk

1. Place 2.5-inch hard disks.
2. Turn the tray downward, align the four holes on the hard disk with those on the tray, and tighten the mounting screws to secure the tray.

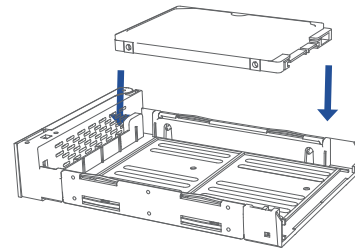

Product operation

1. Add a 2.5/3.5-inch hard disk;
2. Connect the product to the computer USB with the data cable, and then connect the power adapter for power supply;
3. Click the power switch.

Trouble Shooting

Why can't the hard disk appear on the computer?

- ① Please check if your hard disk is a SAS/SATA hard disk and insert it into the slot correctly.
- ② Please check if your hard disk is shown in "Disk Management"/"Disk Utility".
Windows OS: Right-click "This Computer" and select "Manage" to enter "Disk Management".
Mac OS: Type "Disk Utility" in the desktop search bar and press enter.
- ③ If the hard disk is brand new, you need to format and initialize it.

For Windows OS, perform the following steps:

- 1) Right-click this computer and go to Manage -> Disk Management -> Initialize Disk.
- 2) Right-click the unallocated space and click "New Simple Volume". Follow the prompts to select "Next" several times, and then click "Finish".

For Mac OS, please take the following steps:

- 1) Connect it to the enclosure and you will be prompted. Right-click "Initialize" to begin.
- 2) Right-click on "Wipe" and a pop-up window will appear.
- 3) Right-click Wipe in the pop-up window to complete SSD initialization.
- ④ Please replace the hard disk (preferably one that is known to be in good condition) and make sure that the hard disk is not faulty.

For Mac OS, take the following steps:

- 1) Connect it to the cabinet and a prompt will appear. Right-click on "Initialize" to begin.
- 2) Right-click on "Wipe" and a pop-up window will appear.
- 3) Right-click Wipe in the pop-up window to complete SSD initialization.
- ④ Please replace the hard disk (preferably one that is known to be in good condition) and make sure that the hard disk is not faulty.

Cautions

- Please avoid use in high temperature, low temperature, wet, dusty and long-term exposure to sunlight.
- Do not place the product in an environment with corrosive substances, and do not use other chemical solutions to clean the product.
- Keep the product out of reach of children and do not allow children to use the product unsupervised.
- Do not disassemble or repair the products and accessories without authorization.
- Gently clean the product with a dry cloth.

Fitting requirement

- Use of unauthorized or incompatible power supplies, accessories that may cause fire, explosion or other hazards;
- Only accessories approved by the equipment manufacturer and compatible with this model can be used. If you need approved accessories, please contact customer service.

Environmental protection

- Do not dispose of the equipment and its accessories as ordinary household garbage;
- Please comply with local laws governing the disposal of this device and its accessories and support recycling.

Support

If you have any questions, please contact our customer support: support@acasis.com.

Copyright

No part of this user manual may be reproduced or transmitted for any purpose, regardless in which way or by any means, electronically or mechanically, without the explicit written approval of ACASIS.



Made in China