

For additional Singtel WiFi 7 Router(s)
(If you're setting up a WiFi Mesh Network)


Method 1 – Pair via LAN Cable

- 1. Confirm LED on main router (connected to ONT/ONR) is solid green.
- 2. Set up the additional device next to main router and wait till the LED is flashing blue.
- 3. Connect LAN cable from any LAN port on the main router to any available port on the second device. Wait for both units to be green to indicate successful pairing.
- 4. Reposition your second router anywhere in your house to boost coverage.

Method 2 – Pair via WPS

- 1. Confirm LED on main router (connected to ONT/ONR) is solid green.
- 2. Set up the additional device next to main router and wait till the LED is flashing blue.
- 3. Press and hold WPS button for around 5 seconds on the main router, then do the same on additional device.
- 4. Both LED will be fast flashing blue to indicate pairing. Wait at least 5 minutes and both LED will become green when successfully paired.


What’s in the box




Router x 1



Quick Installation Guide x 1




Power Cable x 1



Ethernet Cable x 1

Overview

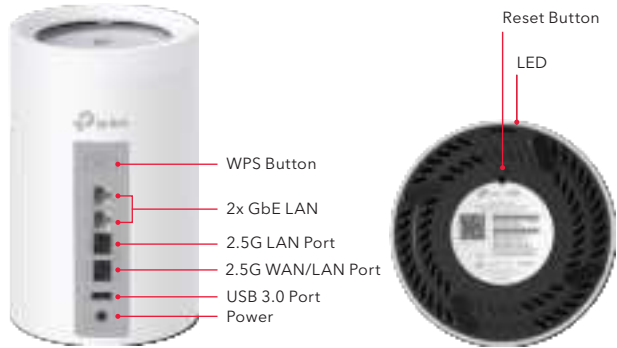

| LED Colour | Device Status |
|--------------------|---|
| Flashing yellow | Starting up or resetting |
| Yellow | Connection quality is normal |
| Flashing blue | Ready for setup |
| Fast flashing blue | Establishing a WPS or mesh connection |
| Blue | Device is set up but internet unavailable |
| Flashing green | Firmware is upgrading |
| Green | Device is set up and connected |
| Flashing red | Lost connection |



WiFi 7 Router
HB611-SGST
Powered by TP-Link



QUICK
INSTALLATION
GUIDE


Your quick & easy step-by-step guide.




Installing Router (i)

There are 2 different set-ups in a Singtel Fibre Broadband Home. Please check your equipment type to confirm the set up.

Optical Network Terminal (ONT)

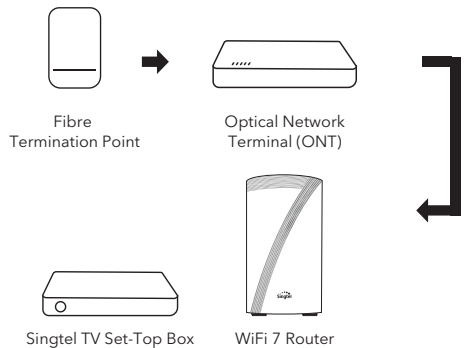

Optional Network Router (ONR)

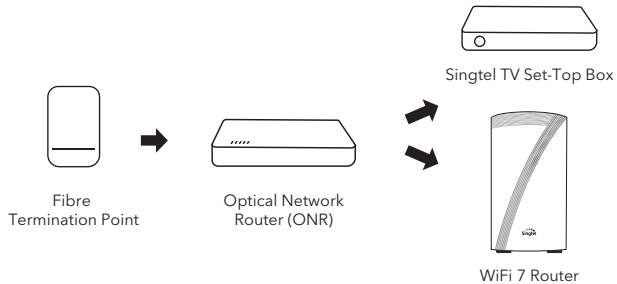

Installing Router (ii)

1. Insert the Power Adapter into the WiFi Router's Power Port and plug it into the power outlet.
2. Connect one end of the Ethernet cable to the LAN 1 port on the ONT or ONR and the other to the WAN port of the router.

If you are using a XGS ONR, connect the Ethernet cable to the 10G LAN port on the ONR.

3. Power up the router. It may take up to 5 minutes to connect where the LED will turn solid green; avoid tampering with the router during setup.
4. Solid green LED means your router has been setup and is ready for use either via WiFi or connected via LAN through the ethernet port.

Default WiFi username and password is printed on the device label found on the bottom of the router.

Optimal Placement

1. Router should be placed at a central location and unobstructed.
2. For optimal connection to eliminate WiFi dead spots, consider adding more Singtel WiFi 7 Routers.

Speak to a Singtel representative to learn more.

Device Safety

1. Keep the router away from any heating devices, dusty or wet environments.
2. Turn off the power, remove the power cord from the outlet, and keep your hands dry during installation.
3. Do not plug a phone jack connector into an ethernet port. This may damage the router.

Troubleshooting Steps

(If you encounter connectivity issues)

1. Turn off and on the WiFi on your device to reset the connection.
2. If the issue persists, reboot the router.
3. To factory reset, depress and hold the reset button on the bottom of the router for at least 5 seconds, then release. The router will be restored to its factory defaults.

For more information, visit singtel.com/routers-support or scan the QR code.

