



MERCUSYS Wireless Router Installation Guide

[Home](#) » [MERCUSYS](#) » MERCUSYS Wireless Router Installation Guide 


MERCUSYS®

Quick
Installation Guide
Wireless Router

Contents

- [1 Hardware Connection](#)
- [2 FAQ \(Frequently Asked Questions\)](#)
- [3 Safety Information](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)
- [5 Related Posts](#)

Hardware Connection

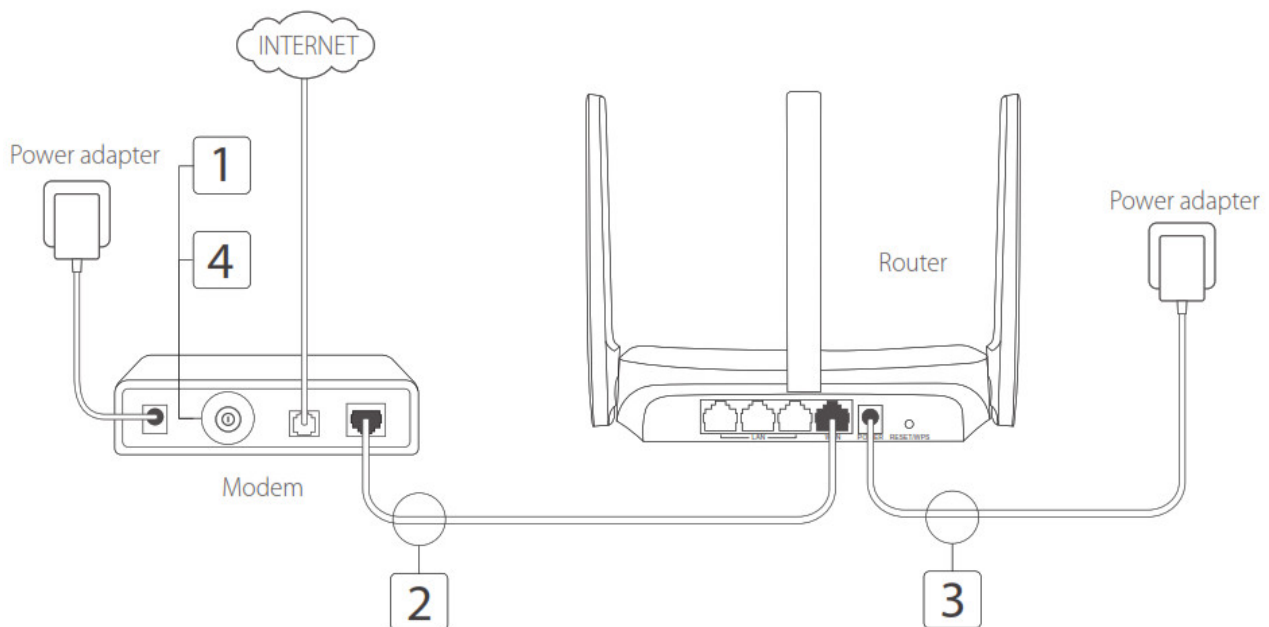

*Image may differ from actual product.

Connect the Hardware

Connect the hardware according to the diagram in the opening chapter of this guide.

If your internet connection is through an Ethernet cable from the wall instead of through a DSL/Cable/Satellite modem, connect the Ethernet cable directly to the router's WAN port, and follow Step 3 to complete the hardware connection.

1. Turn off the modem, and remove the backup battery if it has one.
2. Connect the modem to the WAN port on your router with an Ethernet cable.
3. Turn on the router, and wait for it to start.
4. Turn on the modem.

Configure the Router

1. Connect your computer to the router (Wired or Wireless).
 - Wired: Turn off the Wi-Fi on your computer and connect your computer to the router's LAN port using an Ethernet cable.
 - Wireless: Connect your computer to the router wirelessly. The SSID (Network Name) is on the router's label.
2. Launch a web browser and enter <http://mwlogin.net> in the address bar. Create a password for future logins.

Note: If the login window does not appear, please refer to FAQ > Q1.
3. Follow the step-by-step instructions of Quick Setup to set up your internet connection and wireless network.



Enjoy the internet!

Note: If you have changed the SSID and wireless password during the configuration, use the new SSID and wireless password to join the wireless network.

FAQ (Frequently Asked Questions)

Q1. What can I do if the login window does not appear?

- If the computer is set to a static IP address, change its settings to obtain an IP address automatically.
- Verify that <http://mwlogin.net> is correctly entered in the web browser.
- Use another web browser and try again.

- Reboot your router and try again.
- Disable and enable the network adapter in use again.

Q2. What can I do if I cannot access the internet?

- Check if the internet is working properly by connecting a computer directly to the modem via an Ethernet cable. If it is not, contact your internet service provider.
- Reboot your router and try again.
- Open a web browser, enter <http://mwlogin.net> and run the Quick Setup again.
- For cable modem users, reboot the modem first. If the problem still exists, log in to the web management page of the router to clone the MAC address.

Q3. How do I restore the router to its factory default settings?

- With the router powered on, press and hold the Reset button on the router until there is an obvious change of the LED, and then release the button.
- Log in to the web management page of the router to restore the router to factory settings.

Q4. What can I do if I forgot my web management password?

- Refer to FAQ >Q3 to reset the router, and then create a password for future logins.

Q5. What can I do if I forgot my wireless network password?

- By default, the wireless network has no password.
- If you have set a password for the wireless network, log in to the web management page of the router to retrieve or reset your password.

Note: To learn more about the router, please visit our website <http://www.mercusys.com>.

Safety Information

- Keep the device away from water, fire, humidity, or hot environments.
- Do not attempt to disassemble, repair, or modify the device.
- Do not use a damaged charger or USB cable to charge the device.
- Do not use any other chargers other than those recommended.
- Do not use the device where wireless devices are not allowed.
- Adapter shall be installed near the equipment and shall be easily accessible.

Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.

EU declaration of conformity

MERCUSYS hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives

2014/53/EU, 2009/125/EC, and 2011/65/EU.

The original EU declaration of conformity may be found at <http://www.mercusys.com/en/ce>.



<http://www.mercusys.com/>



Specifications are subject to change without notice. is a registered trademark of **MERCUSYS** TECHNOLOGIES CO., LTD. Other brands and product names are trademarks or registered trademarks of their respective holders.

No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from MERCUSYS TECHNOLOGIES CO., LIMITED. Copyright © 2018 MERCUSYS TECHNOLOGIES CO., LIMITED. All rights reserved.




For technical support, the user guide and more information, please visit




<http://www.mercusys.com/en/support>.

7107500095 REV2.2.0

Documents / Resources

	MERCUSYS Wireless Router [pdf] Installation Guide MERCUSYS, Wireless Router
---	--

References

-  [Welcome to MERCUSYS](#)
-  [Support-Welcome to MERCUSYS](#)
-  [Официальный сайт компании Mercusys в России – производителя Wi-Fi роутеров, точек доступа, адаптеров, усилителей сигнала и коммутаторов для дома](#)