



MONSGEEK M1W RGB Multi-Modes RGB Keyboard User Manual

[Home](#) » [MONSGEEK](#) » MONSGEEK M1W RGB Multi-Modes RGB Keyboard User Manual 

MONSGEEK M1W RGB Multi-Modes RGB Keyboard




Contents

- 1 Thank you for supporting MonsGeek
- 2 Packing List
- 3 System Requirement
- 4 Connectivity Method
- 5 M1W Multi-modes RGB User Manual
- 6 M1W RGB HotKeys
- 7 M1W RGB System Commands (Windows)
- 8 M1W RGB System Commands (Mac)
- 9 M1W RGB Backlight Settings
- 10 M1W Wireless/Wired Connection Guide
- 11 Bluetooth Pairing
- 12 2.4G Pairing
- 13 Battery Level Check
- 14 Key/Lighting Effects Customization Instruction
- 15 MONSGEEK Warranty and Service Statement
- 16 Customer Support
- 17 Documents / Resources
 - 17.1 References
- 18 Related Posts

Thank you for supporting MonsGeek

To provide you with a better user experience, please read this manual carefully before using the product.

Packing List

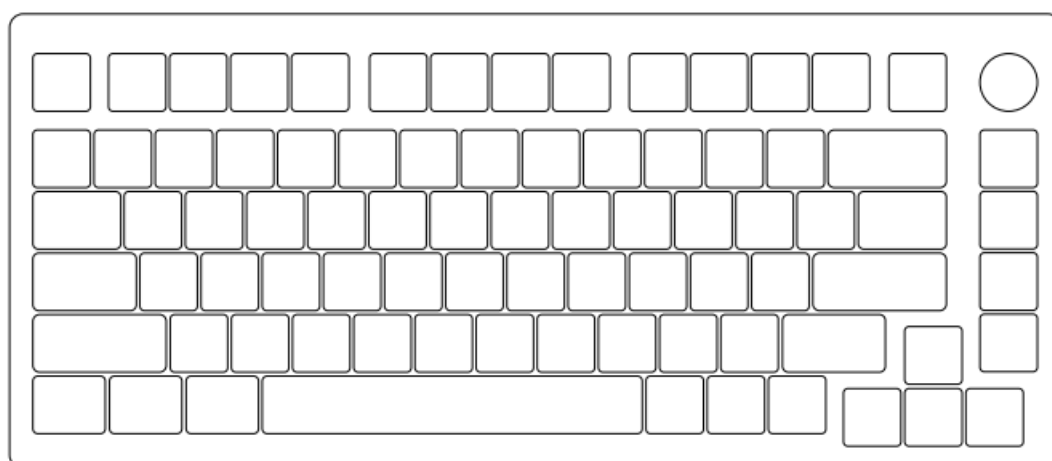

System Requirement

Windows®XP / Vista / 7 / 8 / 10 or higher version


Connectivity Method

Connect the keyboard to your computer by plugging in the USB cable into an available USB port to start using it.

M1W Multi-modes RGB User Manual

Status	Indicator	Re-Connecting	Pairing	Connected
Bluetooth device 1	LED for Key E	Red light blinks slowly	Red light blinks fast	Red light stays on for 2 seconds and then turns off
Bluetooth device 2	LED for Key R	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
Bluetooth device 3	LED for Key T	Yellow light blinks slowly	Yellow light blinks fast	Yellow light stays on for 2 seconds and then turns off
2.4G wireless device	LED for Key Y	Green light blinks slowly	Green light blinks fast	Green light stays on for 2 seconds and then turns off
Wired mode	LED for Key U	N/A	N/A	White light stays on for 2 seconds and then turns off
Status	Indicator	Indicating mode		
Low Battery	Independent LED Indicator (near spacebar)	Red light blinks slowly		
Charging		Steady red		
Fully Charged		Steady green		
Caps	LED for Caps Key	Steady white		
Lock WIN	LED for left WIN Key	Steady white		

M1W RGB HotKeys

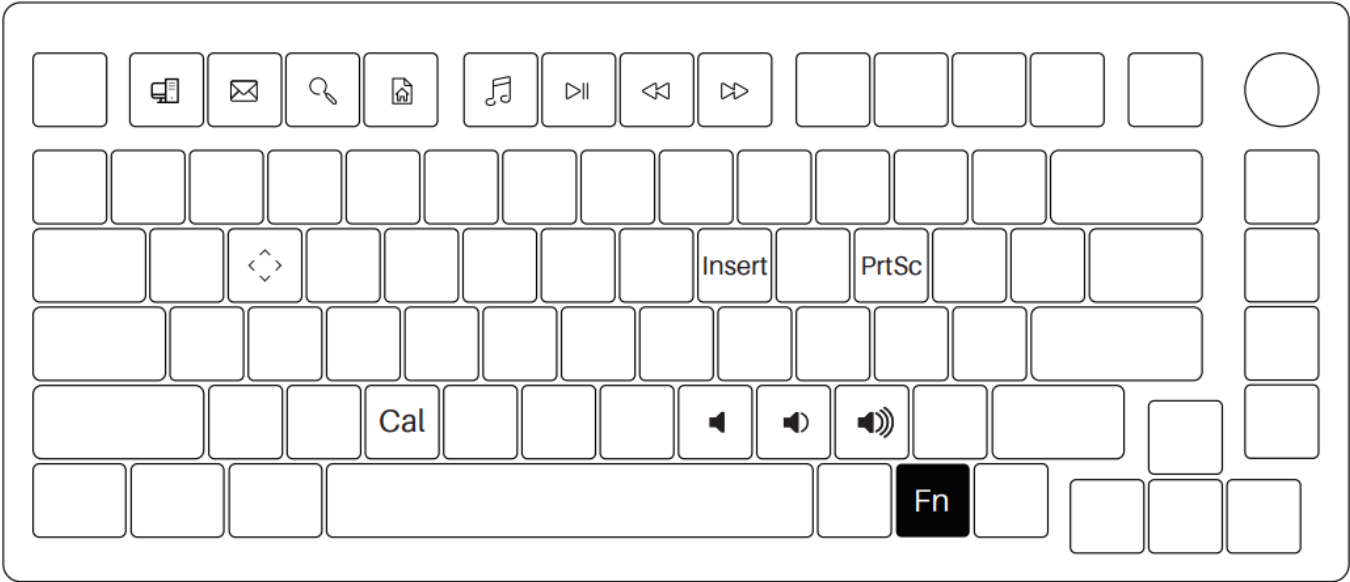


Fn+	F1	=	My Computer
	F2		E-mail
	F3		Windows Search
	F4		Browser Homepage
	F5		Multimedia Player

Fn+	F6	=	Play/Pause
	F7		Previous Song
	F8		Next Song
	P		Print SCR
	C		Calculator

Fn+	I	=	Insert
	M		Mute
	<		Decrease Volume
	>		Increase Volume
	w		S↑w↓ap W←AS→Dwith

M1W RGB System Commands (Windows)

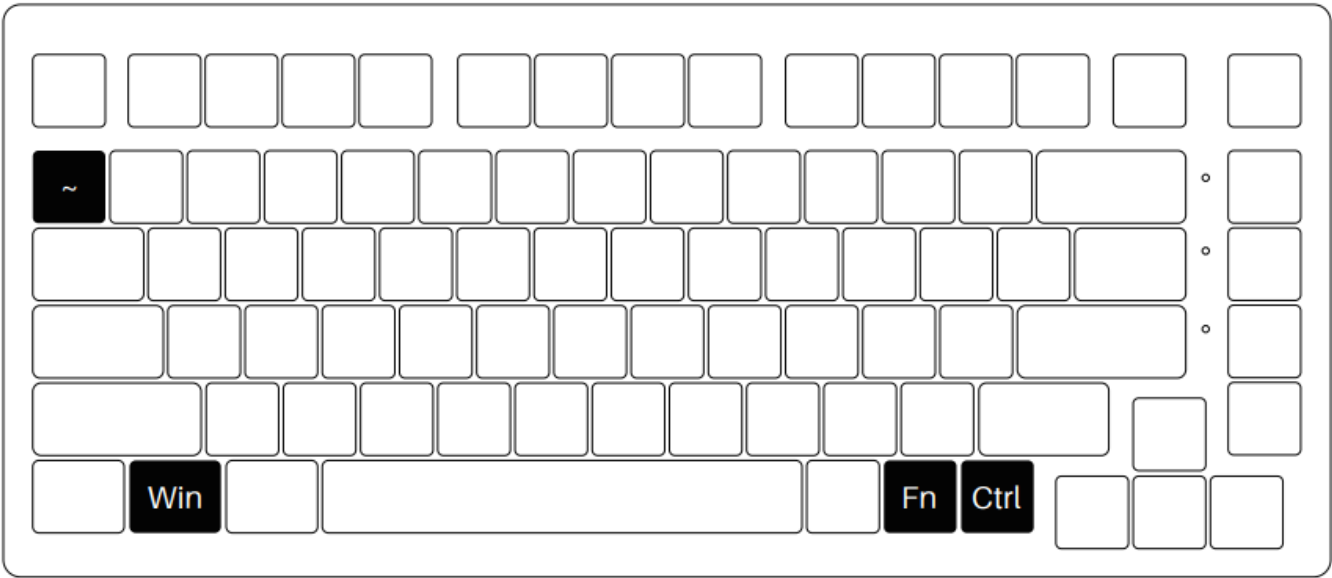

Lock Windows Key

Press Fn and Left Win Key.


Restore Factory Settings

Hold down Fn and press ~ Key for 5S.

Revert Ctrl into Menu Key

Hold down Fn and press right Ctrl for 3S.


M1W RGB System Commands (Mac)

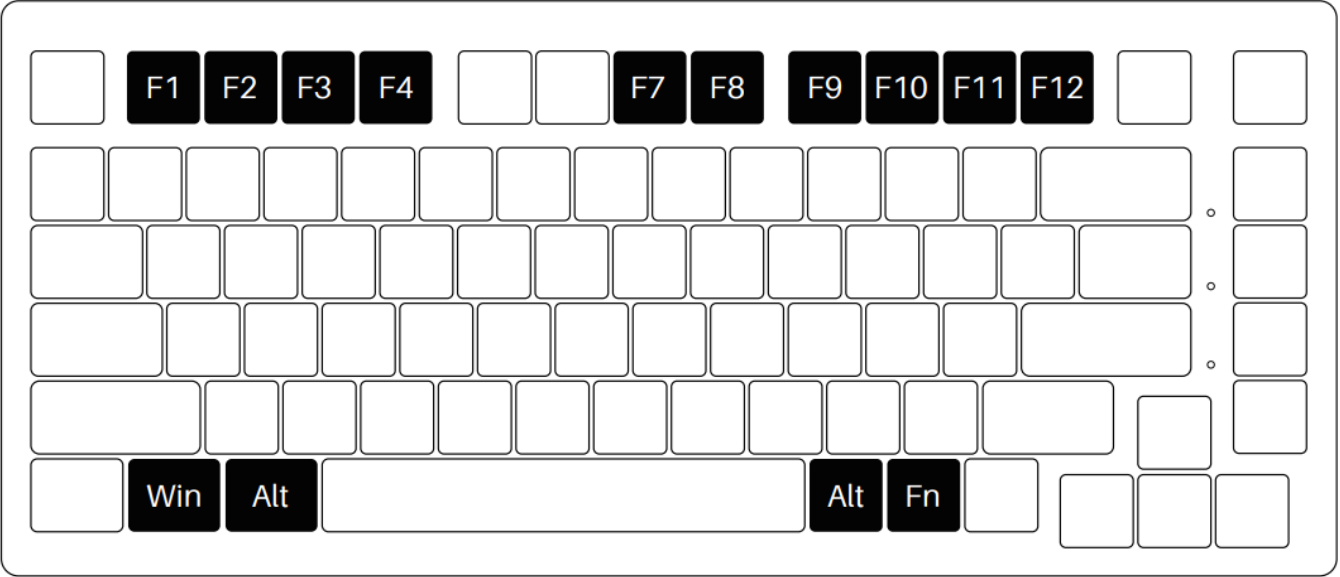

F1	Decrease display brightness	F7	Skip back (Audio)	F11	Volume down
F2	Increase display brightness	F8	Pause/Play (Audio)	F12	Volume up
F3	Open mission control	F9	Skip forward (Audio)	Left Win	Option
F4	Activate Siri	F10	Mute	Left Alt	Command


Right Alt Command

M1W RGB Backlight Settings

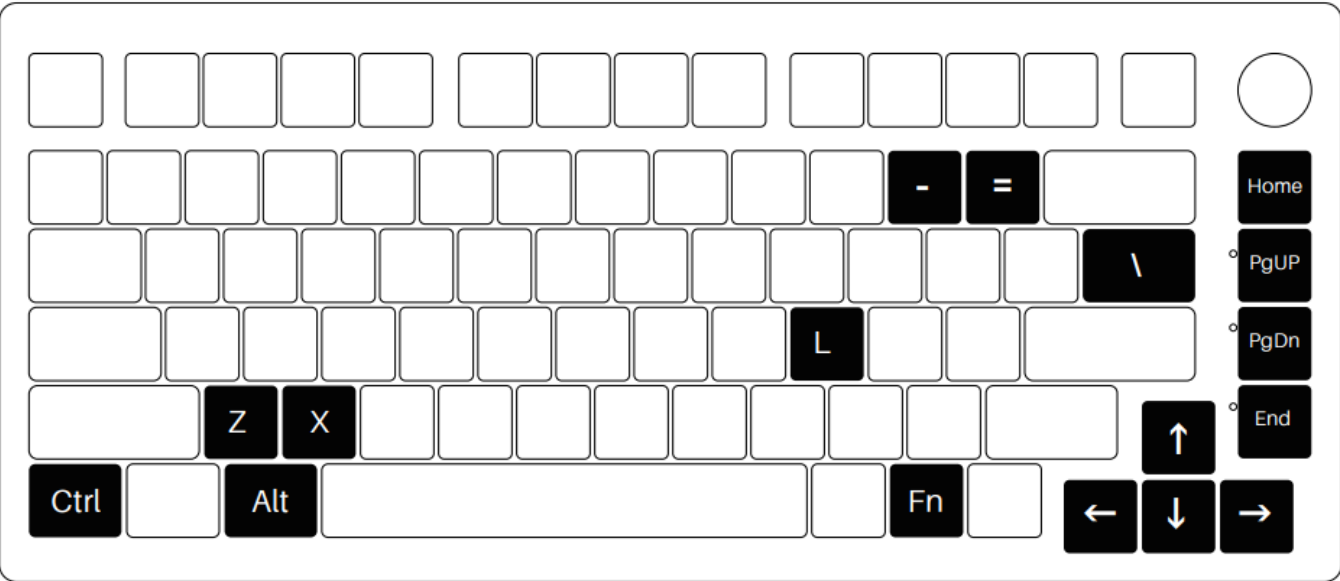


FN+-	Slower Animation	FN+Home	Effect1 Effect2 Effect3 Effect4 Effect5
FN+=	Faster Animation	FN+PgUp	Effect6 Effect7 Effect8 Effect9 Effect10
FN+↑	Bright	FN+End	Effect11 Effect12 Effect13 Effect14 Effect15
FN+↓	Dim	FN+PgDn	Effect16 Effect17 Effect18 Effect19 Effect20
FN+←	Set animation direction to left	FN+\ /	This shortcut allows you to set the backlight color to 7 single color with RGB loop effect
FN+→	Set animation direction to right	FN+L	Light Off/On

M1W Wireless/Wired Connection Guide

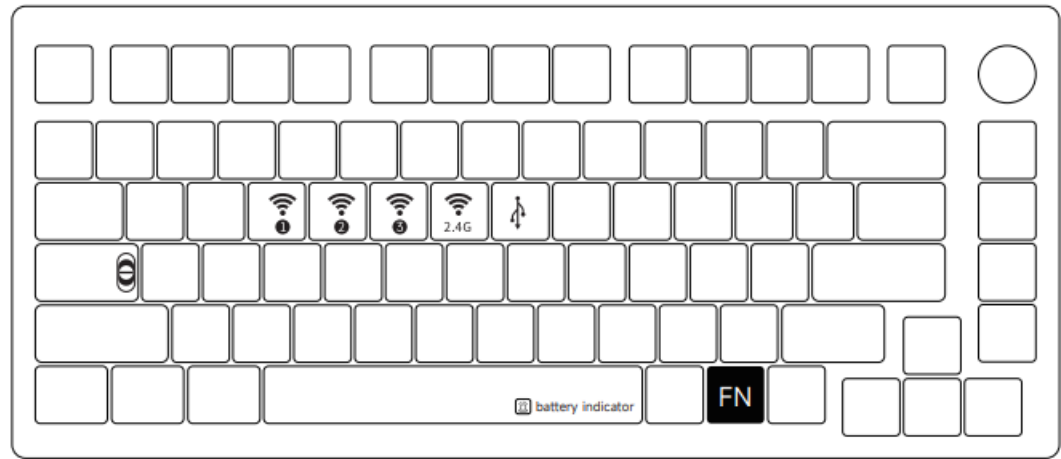

Fn+	E	=	Bluetooth Device 1
	R		Bluetooth Device 2
	T		Bluetooth Device 3
	Y		2.4G Wireless Device
	U		Wired mode

 <p>The switch is located under the CAP S key</p>	Top: Mac (built-in power supply on)
	Middle: Default Windows (built-in power supply off)
	Bottom: Windows (built-in power supply on)

Bluetooth Pairing

After turning on the keyboard, press FN+E/R/T to enter Bluetooth mode. Press and hold the FN+E/R/T combination key for 3 seconds to put the keyboard in pairing mode, with the blue indicator light flashing quickly. Once the connection is established, the indicator light will stay on for 2 seconds. If the device fails to connect, the indicator light will turn off and the keyboard will enter sleep mode.

2.4G Pairing

After turning on the keyboard, press FN+Y to enter 2.4G mode. Then press and hold the FN+Y combination key for 3 seconds to enter pairing mode. Then insert the receiver, and the indicator light will flash quickly. Once pairing is successful, the LED indicator will stay on for 2 seconds. If no available device is found within 30 seconds, the LED indicator will turn off and the keyboard will enter sleep mode.

Battery Level Check

Press the Fn + Space combination keys to check the battery level. If the battery level is below 30%, the space key will show a red light. If it's between 30-50%, the space key will show an orange light. If it's between 50-70%, the space key will show a purple light. If it's between 70-90%, the space key will show a yellow light. If it's 90-100%, the space key will show a green light.

Key/Lighting Effects Customization Instruction

1. The driver can be connected and lighting and key can be customized under the three working modes of the keyboard
2. The three working modes of the keyboard can be matched to drive the music rhythm
3. Please download the MonsGeek Setup driver on our website
4. Users can download the driver via www.monsgeek.com

MONSGEEK Warranty and Service Statement

1. MONSGEEK provides One-Year warranty for customers in mainland China. For other regions, please contact your seller (MonsGeek distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. MONSGEEK will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
3. Disassembling the keyboard without manufacturer/seller's instruction will immediately void the warranty.

4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

Customer Support

 **WARNING** *Water and beverages can't be poured into the Keyboard.*


Precautions *Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.*



Made in China
Company: Shenzhen Yincheng Technology Co., Ltd
Address: 33 Langbi Rd, Bitou Community 1st Industrial Zone, Bao'an District, Shenzhen, China
Tel: 0755-23216420
Website: www.monsgeek.com
Origin: Shenzhen, China



Documents / Resources

	<p>MONSGEEK M1W RGB Multi-Modes RGB Keyboard [pdf] User Manual</p> <p>M1W RGB Multi-Modes RGB Keyboard, M1W RGB, Multi-Modes RGB Keyboard, RGB Keyboa rd, Keyboard</p>
---	--

References

-  - [MonsGeek](#)
-  - [MonsGeek](#)
-  [MonsGeek - Make Cool Gears Accessible.](#)