

PIX-LINK
AX02 Wi-Fi 6 Router



Pix-Link AX02 Wi-Fi 6 Router Installation Guide

[Home](#) » [PIX-LINK](#) » Pix-Link AX02 Wi-Fi 6 Router Installation Guide 

Contents

- [1 Pix-Link AX02 Wi-Fi 6 Router](#)
- [2 Specifications](#)
- [3 FAQ](#)
- [4 Hardware Description](#)
- [5 Device login](#)
- [6 Configure your wireless router](#)
- [7 FCC Statement](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)

PIX-LINK

Pix-Link AX02 Wi-Fi 6 Router



Specifications

- Model: AX02
- Version: VER1.0
- Wireless Standard: Wi-Fi6
- LAN Ports: 1-2
- WAN Ports: 1
- DC-IN: Yes

FAQ


Q: How do I reset the router to factory settings?

A: Press and hold the 'Reset' button for 5 seconds or above to restore factory settings.

Q: What should I do if my LAN/WAN port is not working?

A: Check the network cable connections, ensure proper insertion, and verify that the port is not damaged. Contact customer support if issues persist.

Hardware Description

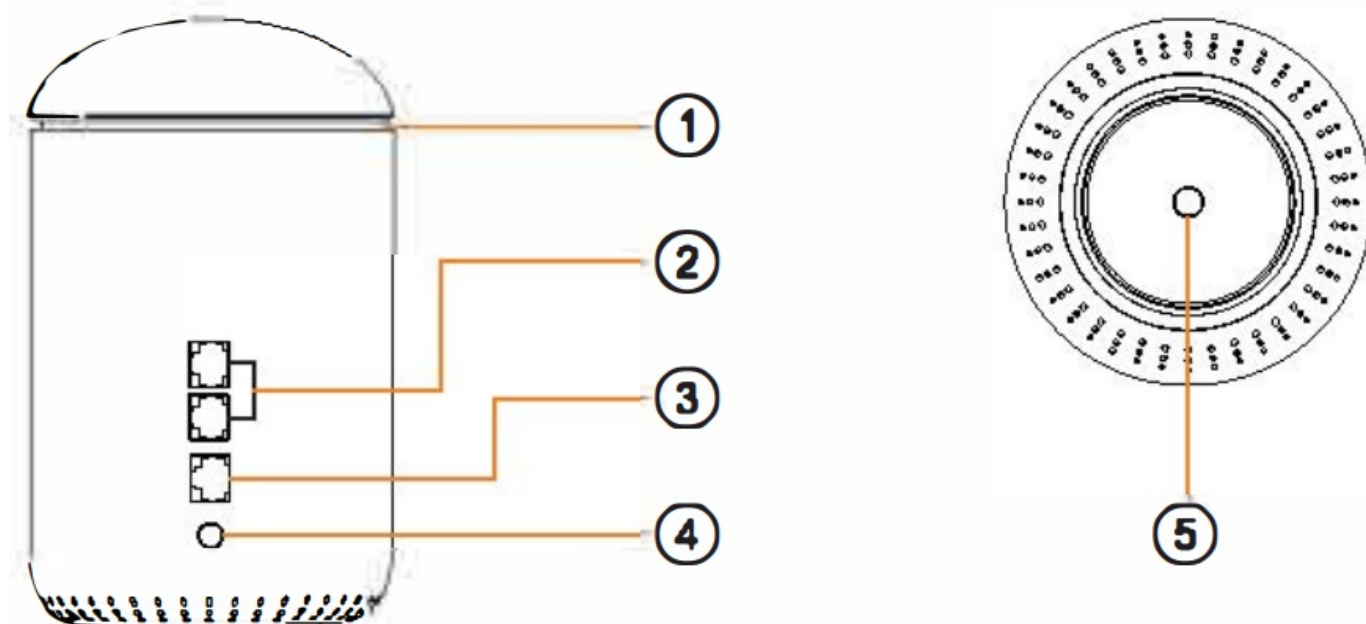

Ports Button

① Indicator LED	Router status indicator
② LAN 1-2 interface	Connect the computer
③ WAN(Internet) interface	Connect to ADSL cat or outer net
④ Power supply (DC-in) jack	Connect the power supply
⑤ Reset button	Press 5s or above to restore factory Settings

LED Description

LED	Status	Indication
System lamp	Orange on	System is starting
	White fast blinking	Reset factory default
	Off	System exception
	White on	WAN Get IP address
	White slow blinking	WAN IP address not obtained
WAN	On	Cable accessed
	Blinking	The port is transmitting of receiving data
	Off	The network cable is not inserted or the WAN/LAN port is abnormal
LAN1-2	On	Cable accessed
	Blinking	The port is transmitting of receiving data
	Off	The network cable is not inserted or the WAN/LAN port is abnormal


Device login

1. Basic quick setting

- A. Unplug your cable /DSL modem power supply, if the modem contains backup power pool, please remove the battery.
- B Use an ethernet cable to connect your modem with a wireless router.
- C Turn on your cable /DSL modem.
- D Check your cable /DSL modem Indicator light, confirm connection to network.

2. Connect to your wireless router

- A. Wired connection: Connect your wireless router to the power supply and turn it on, plug the two ends of the network cable into the computer's network port and the wireless router's LAN port.
- B. Wireless connection: Connect your wireless router to the power supply and turn it on, and use a laptop or mobile phone to connect to the network name (SSID) indicated on the label on the bottom of the router.

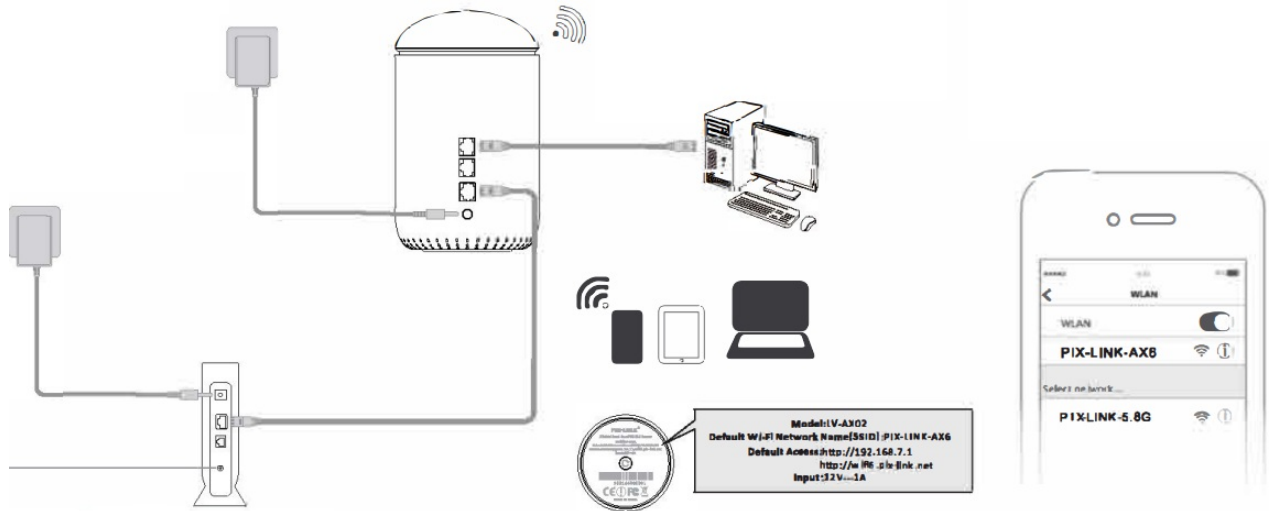

Configure your wireless router

- Open the browser on your computer or phone and type <http://192.168.7.1> or <http://wifi6.pix-link.net> enter the settings screen of the router.



- Follow the router's setup wizard to complete the setup. After the setup is complete, please remember your wireless settings and management

1 First 2 Second 3 Third 4 Finish

Basic Quick Setting

Time Zone: UTC+08:00 Asia/Shanghai

Language: English

Skip Next

Note: If you are using PPPOE to connect to the Internet, you will need to contact your ISP(SP) get the account and password to set up your wireless router correctly.

When using FCC9-certified devices, users should be aware of the following

1. Equipment operation guide: Ensure that the equipment is operated in accordance with the instructions to avoid interference caused by improper use.
2. Installation location: The equipment should be kept away from the human body to avoid long-term exposure to possible radiation.
3. Interference problem: If the device is used in a residential area and causes interference, the user needs to solve it by himself.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


To assure continued compliance, any changes or modifications not expressly approved by the party. Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices). This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

The equipment complies with FCC Radiation exposure limits set forth for uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

Documents / Resources

	Pix-Link AX02 Wi-Fi 6 Router [pdf] Installation Guide 2AOQ6-AX02, 2AOQ6AX02, AX02 Wi-Fi 6 Router, AX02, Wi-Fi 6 Router, Router
---	---

References

- [User Manual](#)