



SABRENT DDR5 4800MHz Rocket Memory Module Installation Guide

[Home](#) » [Sabrent](#) » SABRENT DDR5 4800MHz Rocket Memory Module Installation Guide 

SABRENT DDR5 4800MHz Rocket Memory Module



Contents

1 INSTALLATION INSTRUCTION

2 REQUIRED TOOLS AND PARTS

3 INSTALLATION PROCESS

4 TROUBLESHOOTING

5 CUSTOMER SUPPORT

6 Documents / Resources

6.1 References

INSTALLATION INSTRUCTION


Installation by a professional computer technician is recommended. Before continuing with the installation process, It is your responsibility to review any warranty policy and instructions provided by your motherboard and computer manufacturer to ensure you follow proper procedures to install your device. Some manufacturers may void or limit your motherboard or computer warranty if you proceed with the installation of a new part. Accordingly, by proceeding with any installation, you agree to be solely responsible for any failure to follow any manufacturer's instructions.

REQUIRED TOOLS AND PARTS


- Memory module(s)
- Non-magnetic-tip screwdriver (for removing the cover on your computer)
- Your system's owner's manual

INSTALLATION PROCESS

1. Make sure that you are working in a static-safe environment. Remove any plastic bags or papers from your work space.
2. Shut down your system and make sure the power is completely off before unplugging the power cable from your computer. For laptops, then remove the battery.
3. Hold the power button for 3-5 seconds to discharge residual electricity.
4. Remove your computer's cover. Refer to your owner's manual for how to do this.
5. To protect your new memory modules and your system's components from static damage during the installation process, touch any of the unpainted metal surfaces on your computer's frame before handling and installing memory.
6. Using your system's owner's manual, locate your computer's memory expansion slots. Do not use any tools in the removal or installation of memory modules.
7. Insert your new memory module(s) in accordance with the illustrations in this guide. Align the notch(es) on the module with the notch(es) in the slot, and then press the module down until the clips on the slot snap into place. Fill the memory slots on your computer starting with the highest density (i.e. put the highest density module in bank 0).

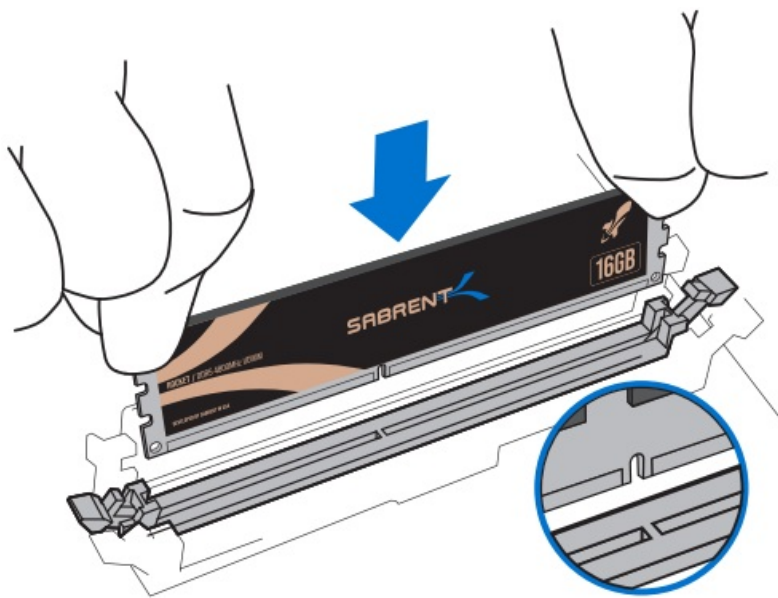

Using firm, even pressure, push DIMM into slot until clips snap into place. Do not assist clips.

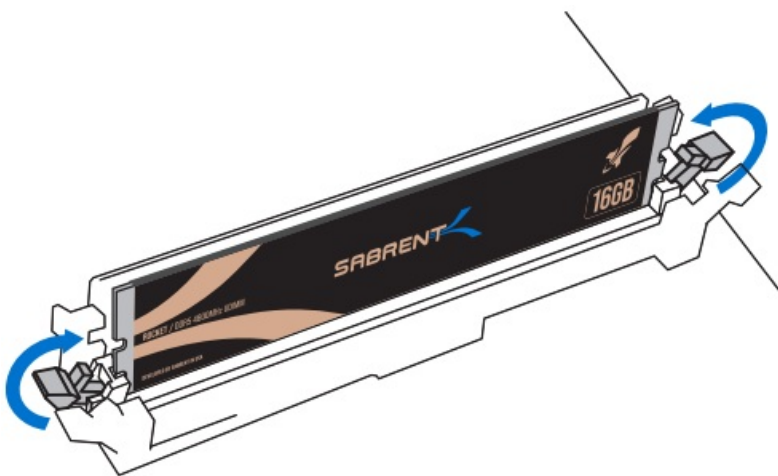

8. Once the module(s) have been installed, replace the cover on your computer and reconnect the power cord or battery. Installation is now complete.

TROUBLESHOOTING

If your system does not boot, check the following:



1. If you receive an error message or hear a series of beeps.
your system may not be recognizing the new memory.
Remove and reinstall the modules to ensure they are securely sealed in the slots.
2. If your system won't boot, check all of the connections inside your computer. It is easy to bump a cable and pull it out of its connector, disabling devices such as your hard drive or SSD drives.
3. When restarting your system, you may get a message prompting you to update the configuration settings.
Refer to your owner's manual for information.
4. If you get a memory mismatch message, follow the prompts to enter the Setup menu, and then select Save and Ext (This is not an error, some systems must do this to update the system settings.)

CUSTOMER SUPPORT

Please contact our Technical Support Team for additional troubleshooting



Documents / Resources

	<p>SABRENT DDR5 4800MHz Rocket Memory Module [pdf] Installation Guide DDR5 4800MHz Rocket Memory Module, 4800MHz Rocket Memory Module, Rocket Memory Module, Memory Module</p>
	<p>SABRENT DDR5 4800MHz Rocket Memory Module [pdf] Installation Guide DDR5 4800MHz Rocket Memory Module, 4800MHz Rocket Memory Module, Rocket Memory Module, Memory Module</p>

References

- [User Manual](#)

[Manuals](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.