



---

[Home](#) » [SILVER MONKEY](#) » **Silver Monkey SMXC045 Cassette Computer Cases Instruction**

**Manual** 

## **Contents** [ [hide](#) ]

- [1 Silver Monkey SMXC045 Cassette Computer Cases](#)
- [2 Safety Information](#)
- [3 Package contents](#)
- [4 Included Accessories](#)
- [5 How to use the product](#)
- [6 Disassembling the panels](#)
- [7 Assembling the Power Supply](#)
- [8 Assembling the Motherboard](#)
- [9 Fan Installation and Connection](#)
- [10 Removing the dust filters](#)
- [11 Mounting SSDs](#)
- [12 Specification](#)
- [13 Warranty & Support](#)
- [14 FAQ](#)
- [15 Documents / Resources](#)
  - [15.1 References](#)


# Silver

## **Silver Monkey SMXC045 Cassette Computer Cases**



## Safety Information

- Avoid direct contact of the device with water and other liquids.
- Do not use the appliance in an environment with high humidity.
- Keep the device out of the reach of children. They may swallow some elements.
- Use the appliance only in accordance with the user manual.
- If the device stops working properly – contact us.

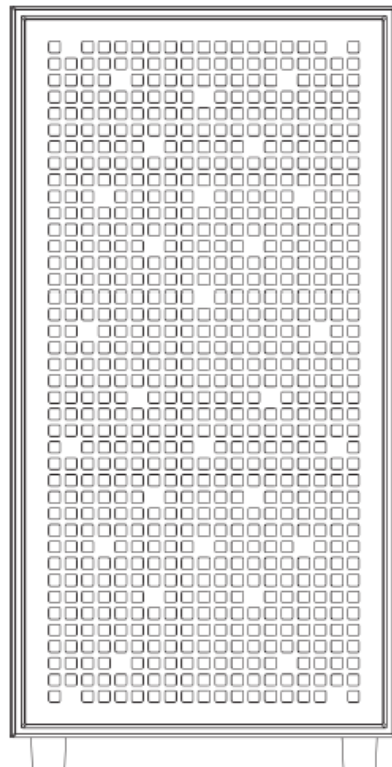












## Package contents

- Case
- Manual

- Mounting kit



Included Accessories

Item		Name	Use
		(1)Screw M3 5mm x13	Motherboard/SSD
		(2)Screw #6-32 6mm x5	PCIE Power Supply/Expansion Cards
		(3)Screw #6-32 6.5mm x2	Motherboard mounting pin
		(4)Screw #6-32 5mm x4	HDD 3.5"
		Cable ties	Cable management
		Spare plastic latch	For Glass Panel
		Rubber washer	To the graphics card bracket

How to use the product



Panel I/O.

REMARK! Before connecting the wires, refer to the motherboard manual.

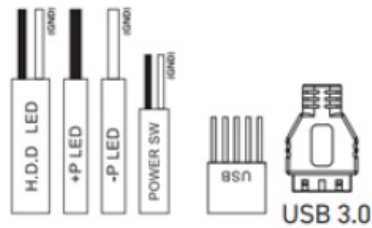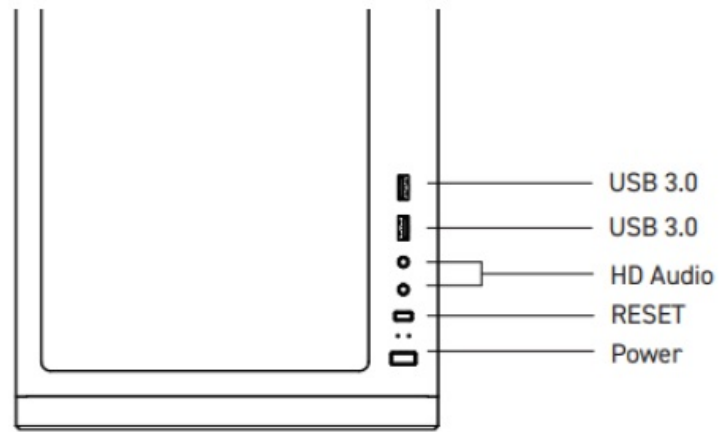


## Disassembling the panels

- Glass panel: Bend the panel at a 15° angle, then lift them up.
- Side Panel: Using the toolless screws (A), unscrew the panel, then slide the panel.
- Front panel: Grasp the panel from underneath (B), then pull it towards you with a firm motion.

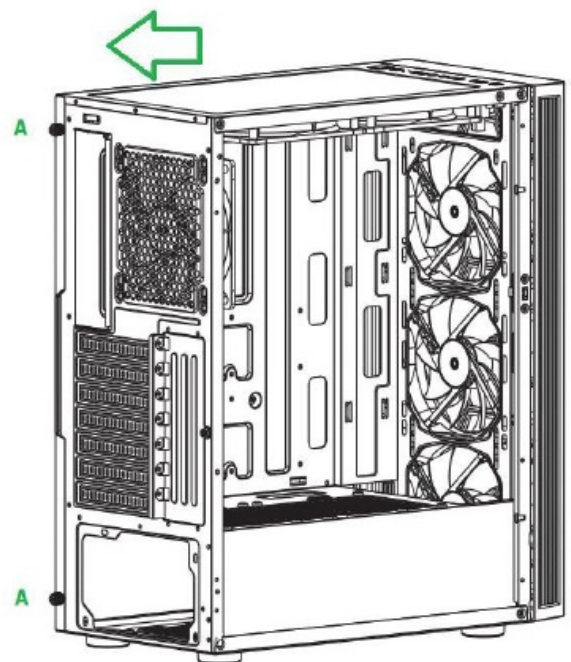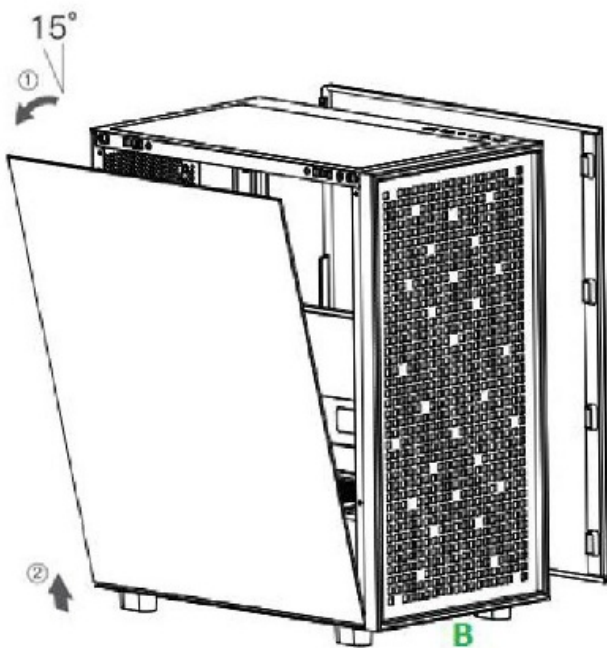

## Assembling the Power Supply

- Using the screws (2), screw the power supply to the chassis. Make sure the power supply is facing the fan down the case.

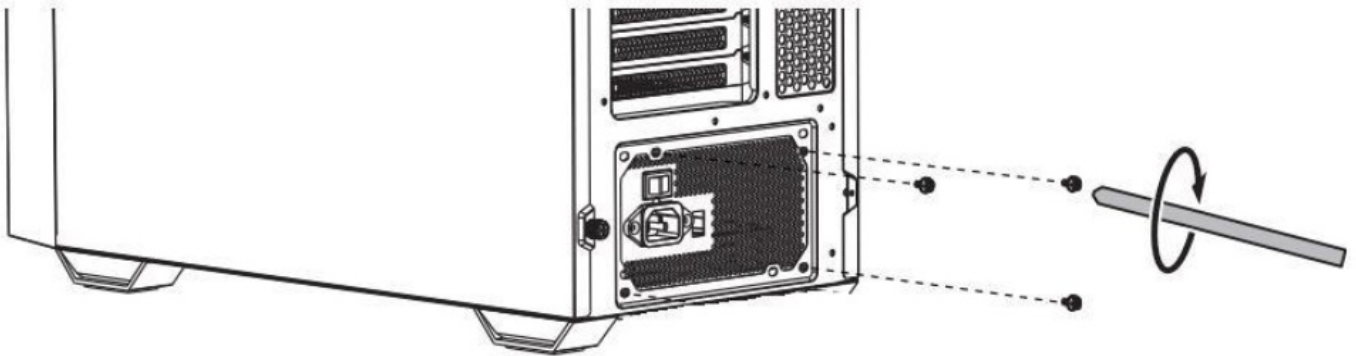


## Assembling the Motherboard

**Remark!** Before mounting, please refer to the motherboard manual.

The case supports motherboard standards: ITX, mATX, E-ATX and ATX.



To mount the motherboard, use the screws (1). Adjust the mounting pins (3) to the size of your motherboard.

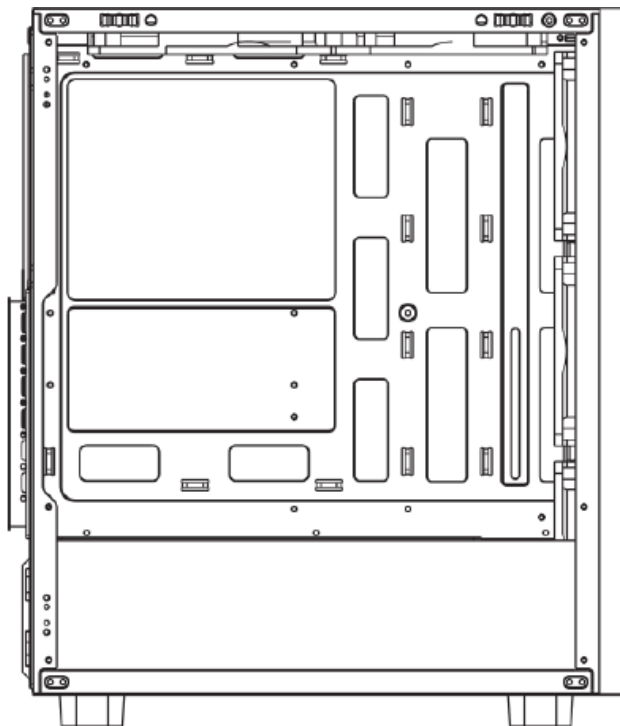

## Fan Installation and Connection

Three 140mm fans are pre-installed on the front of the case. You can swap them out for three 120mm fans. To remove the front fans, remove the front panel. One 140mm fan is


mounted on the back of the case. You can install two 120mm/140mm fans on the top of the case.

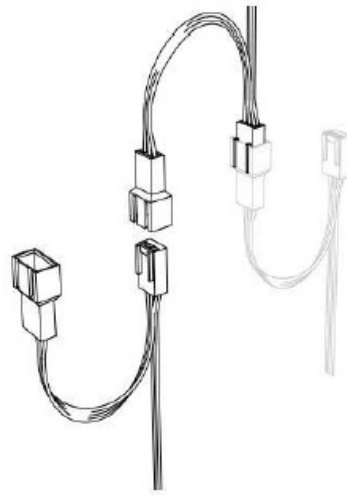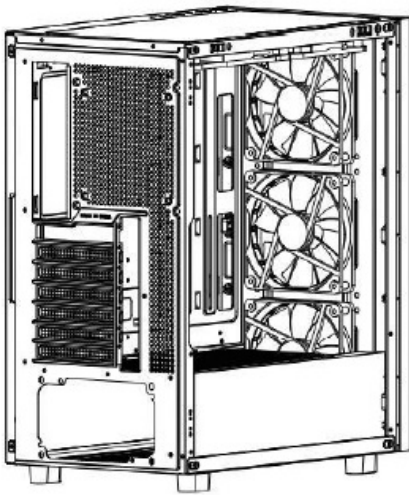

## Removing the dust filters

At the top of the case and at the bottom you will find dust filters. The filters are mounted on magnetic strips. Gently prying them open will allow them to be dismantled.


Remark! The front dust filter is integrated into the panel. It is not possible to disassemble the filter yourself.

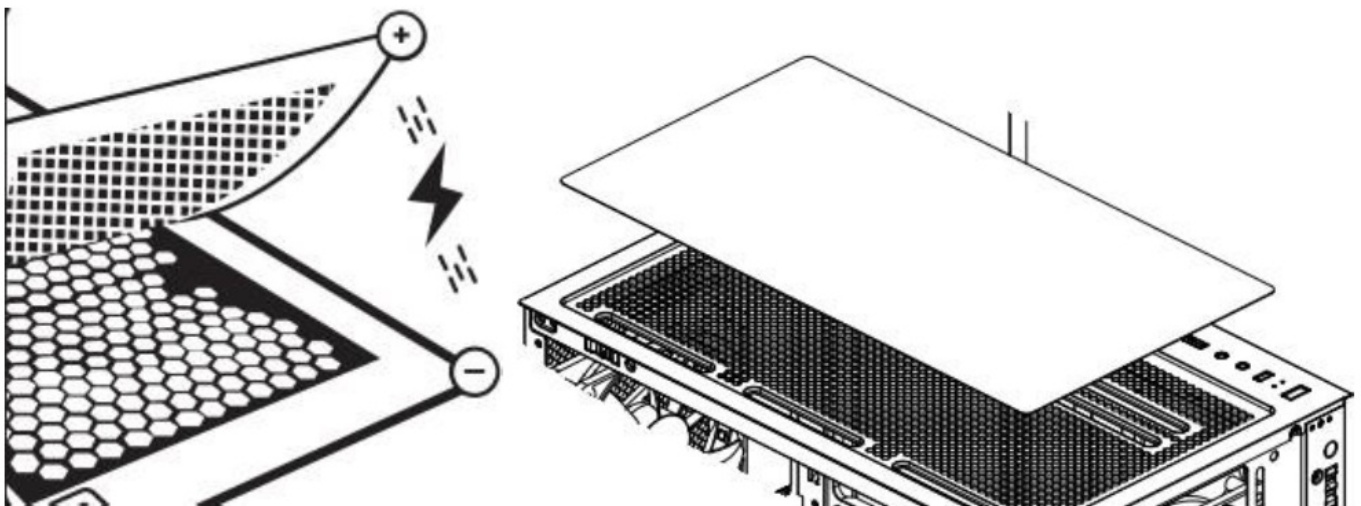

## Mounting SSDs


Disassemble the side panel of the case. The disk frame is mounted on the bottom of the case with tool-free screws. Unscrew the bezel, and then screw the disc to the bezel. Use the screws marked with the number 1.



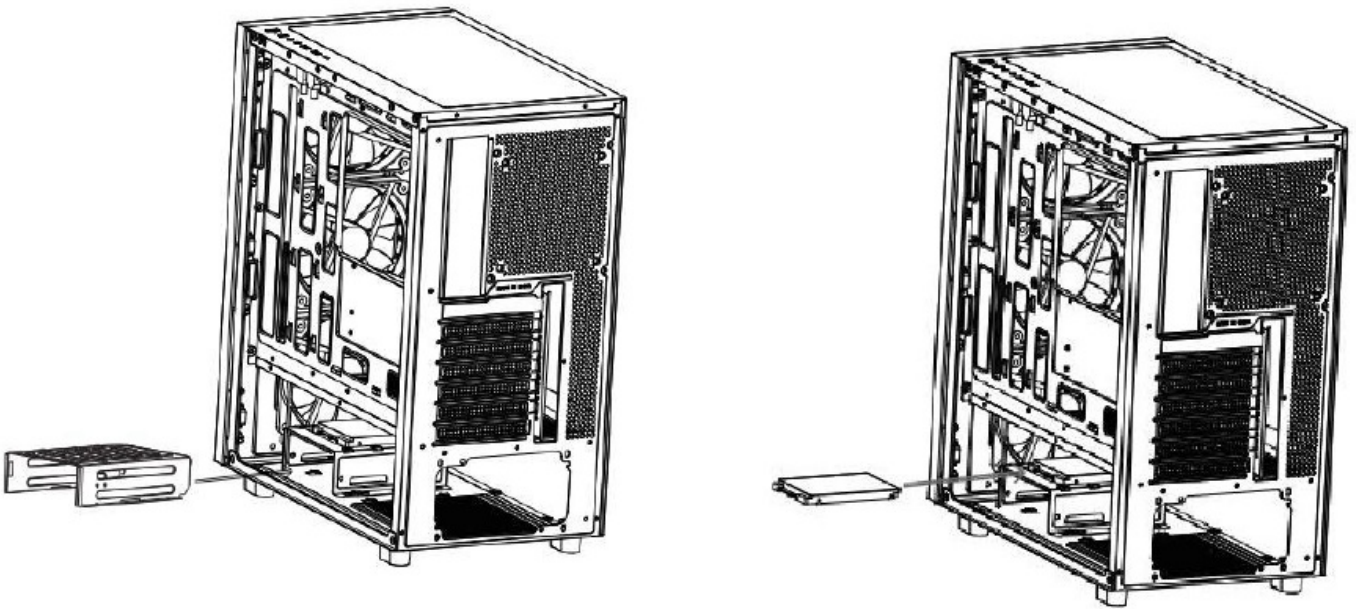

### **Mounting HDDs.**

Unscrew the disk frame. Then use the screws (4) to secure the HDD. You can install a maximum of two HDDs in the frame.

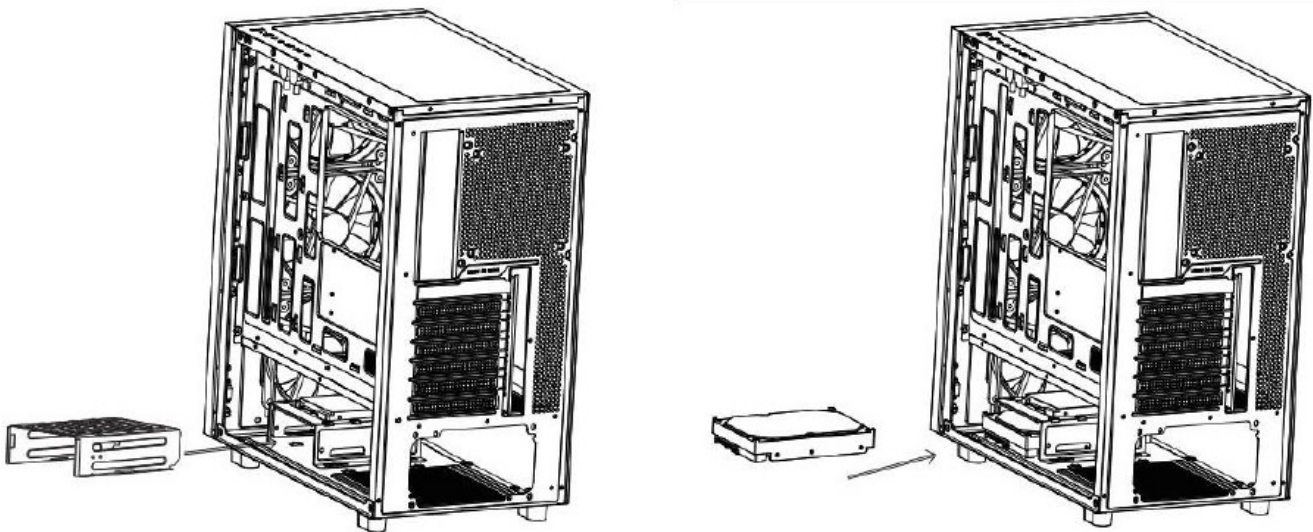


### **Mounting the Graphics Card.**

Unscrew the rear panel grilles (A). Next, remove the caps of the PCIe expansion cards. Use the screws (2) to mount the graphics card.

You can use the factory graphics card bracket. Using screws, adjust the mounting height of the bracket. Pay close attention to ensure that the bracket does not interfere with the graphics card fan.

Remark! Remove as many PCIe port covers as your graphics card requires.

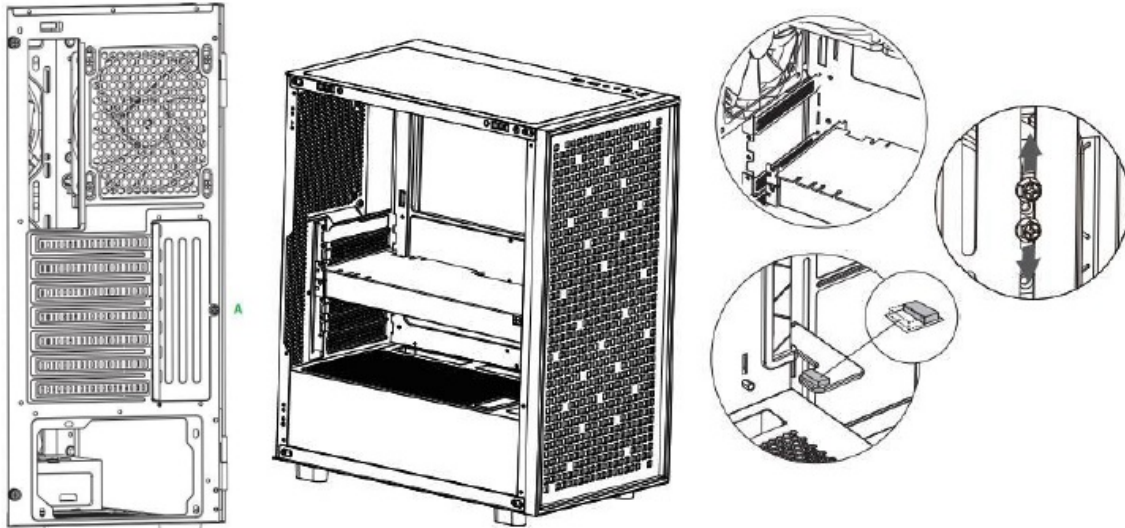


### **Installation of All in One water cooling recommended.**

You can install an All in One water cooling system in the case. We recommend the installation of radiators of the following sizes: Front: 240 / 280 / 360 mm.

Top: 240 mm.

Remark! Before installing the water cooler, please refer to the enclosed instructions.

When mounting the water cooler on the front of the case, make sure that the cooler will not interfere with the graphics card bracket.

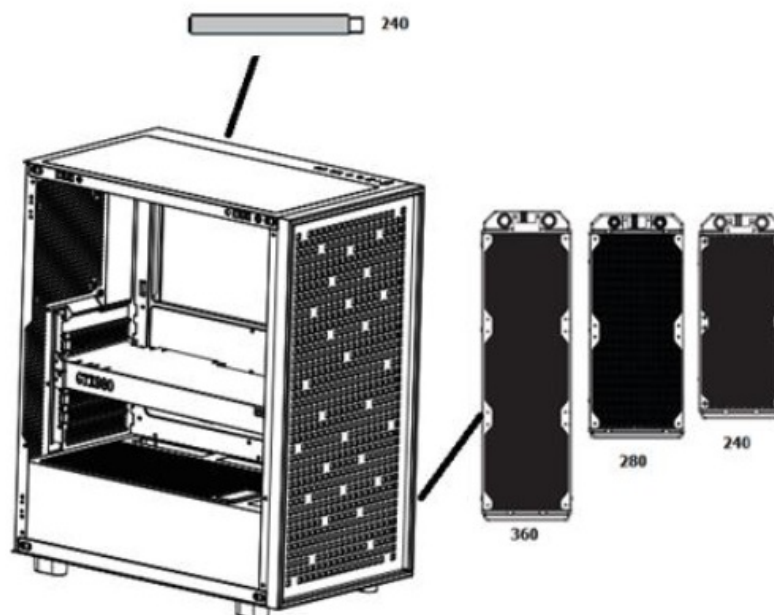

## **Specification**



Side panel	Tempered Glass
Backlight	None
Motherboard Standard	Mini-ITX Micro-ATX ATX E-ATX
Internal Drive Spaces	1x 3.5", 1x 2.5"
Expansion card slots	7
Maksymalna długość karty graficznej	340 mm
Maximum CPU Cooler Height	185 mm
Maximum number of fans	6
Fan mounting options	Front: 3x 120 mm, 3x 140 mm Top: 2x 120 mm, 2x 140 mm Rear: 1x 120 mm, 1x 140 mm
Water Cooling Mounting Options	Top: 240 mm Front: 240 mm, 280 mm, 360 mm
Number of Fans Installed	4
Buttons	Power Reset
Connector Leads	2x USB 3.0 socket Audio jack

Colour	Black
Height	436 mm
Width	230 mm
Depth	360 mm
Scales	5,5 kg

## Warranty & Support

Your product comes with a 24-month manufacturer's warranty. For more information, visit the [www.silvermonkey.com/supportwebsite](http://www.silvermonkey.com/supportwebsite).

If you would like support on how to use the product, please contact us at [kontakt@silvermonkey.com](mailto:kontakt@silvermonkey.com).

## Producer:

- Silver Monkey sp. z o.o.
- Twarda 18 00-105 Warsaw
- Poland v. 1/14.07.2024

## Environmental & Compliance



As the manufacturer of this equipment, we declare that it meets the requirements of the relevant European Union directives. If you need a copy of the declaration of conformity – please contact us.



Do not dispose of this equipment with other waste. The materials from which the equipment is made can have a bad impact on the environment and human health if the product is disposed of improperly. Hand over used equipment to an appropriate e-waste collection point.

# FAQ


How do I clean the SMXC045 Cassette?

To clean the product, use a soft cloth dampened with water or a mild detergent. Avoid using harsh chemicals that may damage the surface.

Can I use the SMXC045 Cassette outdoors?

The product is designed for indoor use. Using it outdoors may expose it to conditions that could affect its performance.

## Documents / Resources

	<a href="#">Silver Monkey SMXC045 Cassette Computer Cases [pdf]</a> Instruction Manual SMXC045 Cassette Computer Cases, SMXC045, Cassette Computer Cases, Computer Cases
--	---

## References

- [User Manual](#)

SILVER  
MONKEY

Cassette Computer Cases, Computer Cases, SILVER MONKEY, SMXC045, SMXC045 Cassette Computer Cases

## Leave a comment

Your email address will not be published. Required fields are marked \*

Comment \*

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.