

# A3002RU-V2 Quick Installation Guide


## Contents

- [1 A3002RU-V2 Quick Installation Guide](#)
- [2 Installation Diagram](#)
- [3 Interface](#)
- [4 DiagramMethod One: login via tablet/Cellphone](#)
- [5 2 Method Two: login via PC](#)
- [6 DOWNLOAD](#)
- [7 Related Posts](#)

## A3002RU-V2 Quick Installation Guide


It is suitable for: **A3002RU-V2**

## Installation Diagram

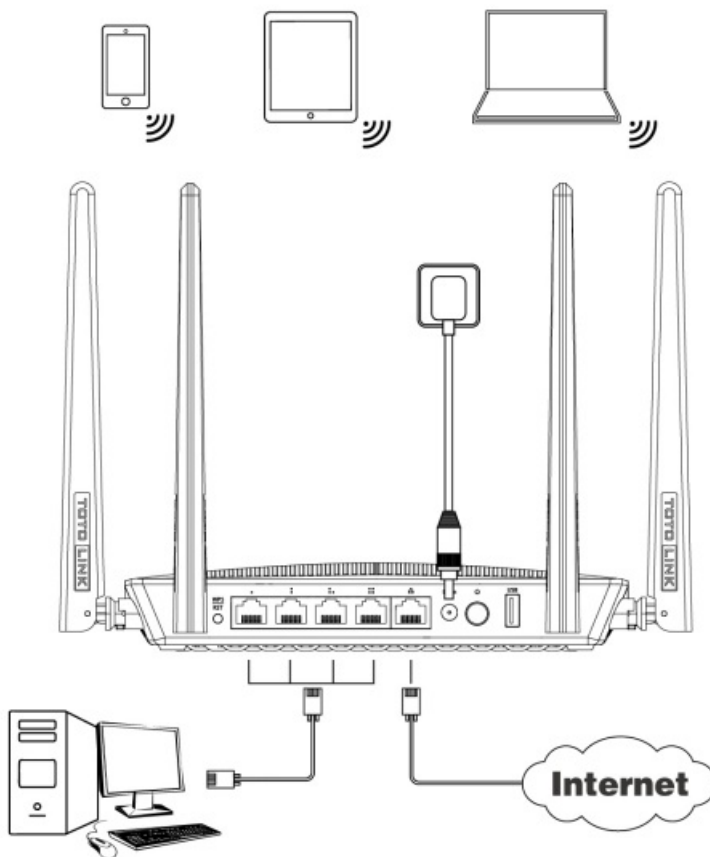

Default Wi-Fi Name:  
TOTOLINK\_A3002RU  
TOTOLINK\_A3002RU\_5G


## Interface

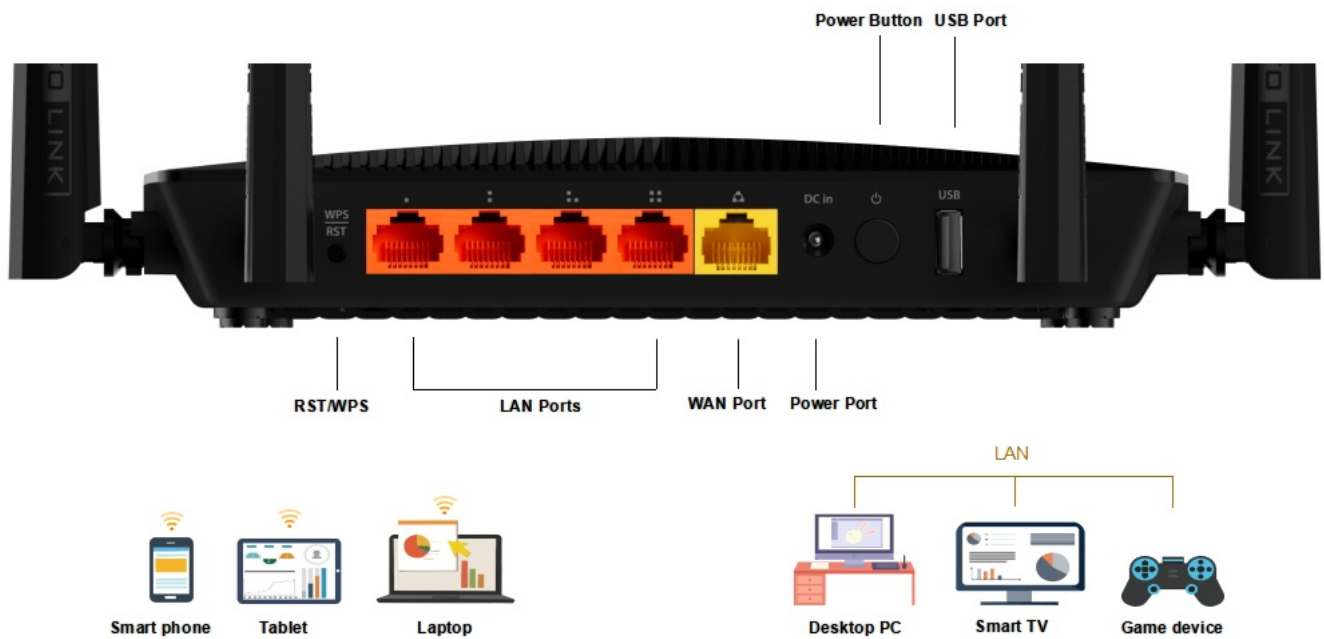

## Diagram Method One: login via tablet/Cellphone

### STEP-1:

Find TOTOLINK\_A3002RU or TOTOLINK\_A3002RU\_5G on the WLAN list of your Phone, and choose to connect. Then any Web browser on your Phone and enter <http://itotolink.net> on the address bar.

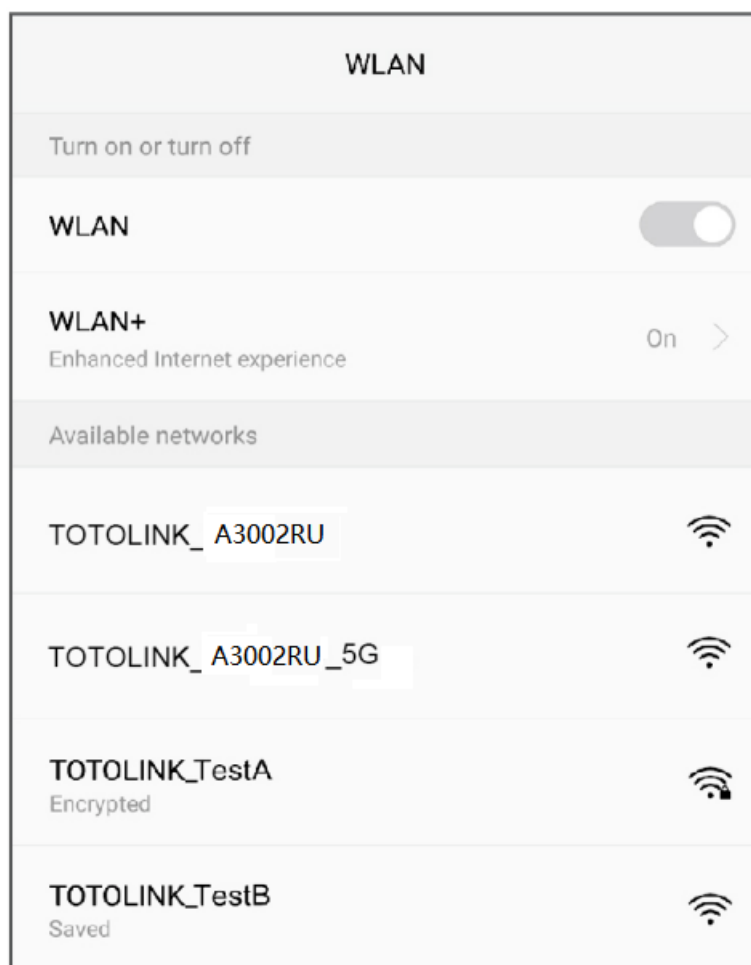

### STEP-2:

Enter admin for the password and then click LOGIN.

Sign in to TOTOLINK\_

TOTO LINK

The Smartest Network Device

Welcome

User Name

admin

Password

[Forgot Password](#)

LOGIN

**STEP-3:**

Click Quick Setup.

Sign in to TOTOLINK\_



## TOTOLINK Router Setting

Model No - A3002RU\_V2

F/W Version: V2.0.0



Quick Setup



Advanced Setup

### STEP-4:

Time Zone setting. According to your location, please click the Time Zone to choose a correct one from the list, then click Next.

## \* WAN Setting

PPPoE   **Dynamic IP**   Static IP

Please enter User Name and Password provided by your ISP

User Name

Password

Back   Next

## \* WAN Setting

PPPoE   Dynamic IP   **Static IP**

WAN Status

IP Address	
Subnet Mask	
Gateway	
DNS Server	

Back   Next

## \* WAN Setting

PPPoE   Dynamic IP   **Static IP**

Please complete below Information

IP Address	
Subnet Mask	
Gateway	
DNS Server	

Back   Next

### STEP-5:

Internet Setting. Choose a suitable connection type from the list and fill in the information required, then click Next.

## \* WAN Setting

PPPoE

Dynamic IP

Static IP

### WAN Status

IP Address

Subnet  
Mask

Gateway

DNS Server

Back

Next

### STEP-6:

Wireless Setting. Create passwords for 2.4G and 5G Wi-Fi (Here users could also revise the default Wi-Fi name) and then click Next.



## Setup Successfully

Your device will lose connection for Wi-Fi setting changed. Please reconnect.

### 2.4G Wi-Fi

SSID	TOTOLINK_
Wi-Fi Password	88888888

### 5G Wi-Fi

SSID	TOTOLINK_
Wi-Fi Password	88888888

## 2 Method Two: login via PC

### STEP-1:


Connect your computer to the router by cable or wireless. Then run any Web browser and enter <http://itotolink.net> in the address bar.

### STEP-2:


Set a new login password for the device, it is recommended to set the password with alphanumeric characters and then press Install.

## New Login Password

[Skip](#)

 New Password

Length range is 6-15

 Confirm Password

Length range is 6-15

Set Up


Note: Set a new login password to prevent the router from being compromised

### STEP-3:


Click Quick Setup.

## USER LOGIN


[Forget Password?](#)

 User Name


admin


 Password

.....

 Verification Code

1JRP






Login



#### STEP-4:

Click on “Auto Detect” to detect the Wan Type in your network.

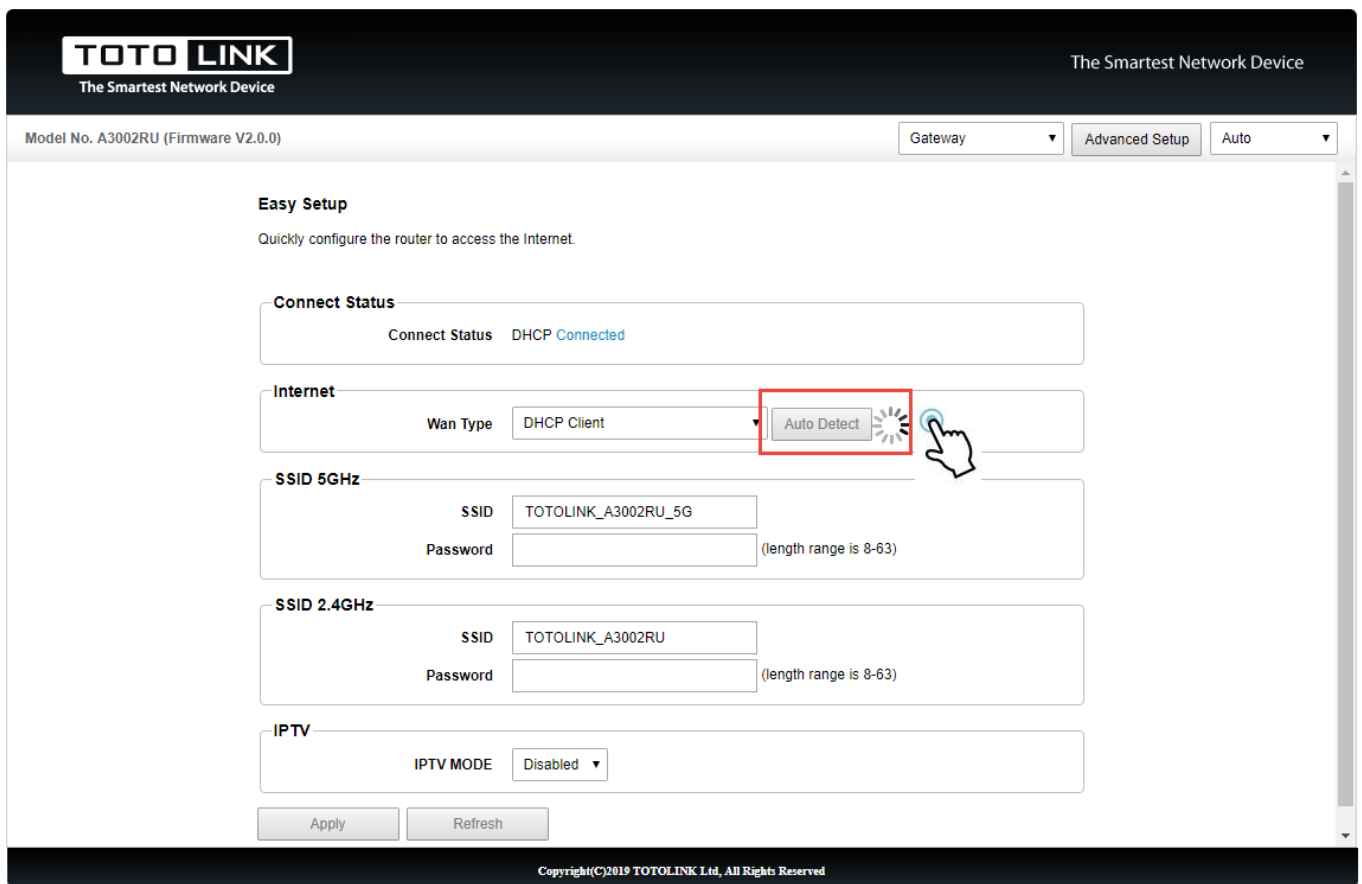

The screenshot displays the TOTO LINK web interface for the A3002RU router (Firmware V2.0.0). The page is titled "Easy Setup" and includes a sub-header "Quickly configure the router to access the Internet." The interface is divided into several sections: "Connect Status" (showing "DHCP Connected"), "Internet" (with "Wan Type" set to "DHCP Client" and an "Auto Detect" button highlighted by a red box and a hand cursor), "SSID 5GHz" (with SSID "TOTOLINK\_A3002RU\_5G" and a password field), "SSID 2.4GHz" (with SSID "TOTOLINK\_A3002RU" and a password field), and "IPTV" (with "IPTV MODE" set to "Disabled"). At the bottom, there are "Apply" and "Refresh" buttons. The footer contains the copyright notice "Copyright(C)2019 TOTOLINK Ltd, All Rights Reserved".

#### STEP-5:

Now you can see the Easy Setup page. All basic settings could be done here, including Internet Settings and Wireless Settings.

Model No. A3002RU (Firmware V2.0.0)

Gateway ▼

Advanced Setup

Auto ▼

**Easy Setup**

Quickly configure the router to access the Internet.

**Connect Status**

Connect Status DHCP Connected

**Internet**

Wan Type DHCP Client ▼

Auto Detect

**SSID 5GHz**

SSID TOTOLINK\_A3002RU\_5G

Password 88888888 (length range is 8-63)

**SSID 2.4GHz**

SSID TOTOLINK\_A3002RU

Password 88888888 (length range is 8-63)

**IPTV**

IPTV MODE Disabled ▼

Apply

Refresh

Copyright(C)2019 TOTOLINK Ltd, All Rights Reserved

## DOWNLOAD

A3002RU-V2 Quick Installation Guide – [[Download PDF](#)]





---

Manuals+.