

A3700R Quick Installation Guide

Contents

- [1 A3700R Quick Installation Guide?](#)
- [2 Interface](#)
- [3 DiagramMethod One: login via tablet/Cellphone](#)
- [4 2 Method Two: login via PC](#)
- [5 DOWNLOAD](#)
- [6 Related Posts](#)

A3700R Quick Installation Guide?

It is suitable for: **A3700R**


Default SSID

2.4G: TOTOLINK_Mode No.

5G: TOTOLINK_Mode No._5G

Note:

- 1) Turn on the power and start the system in advance to reduce your waiting time.
- 2) Please connect the router in the following order.

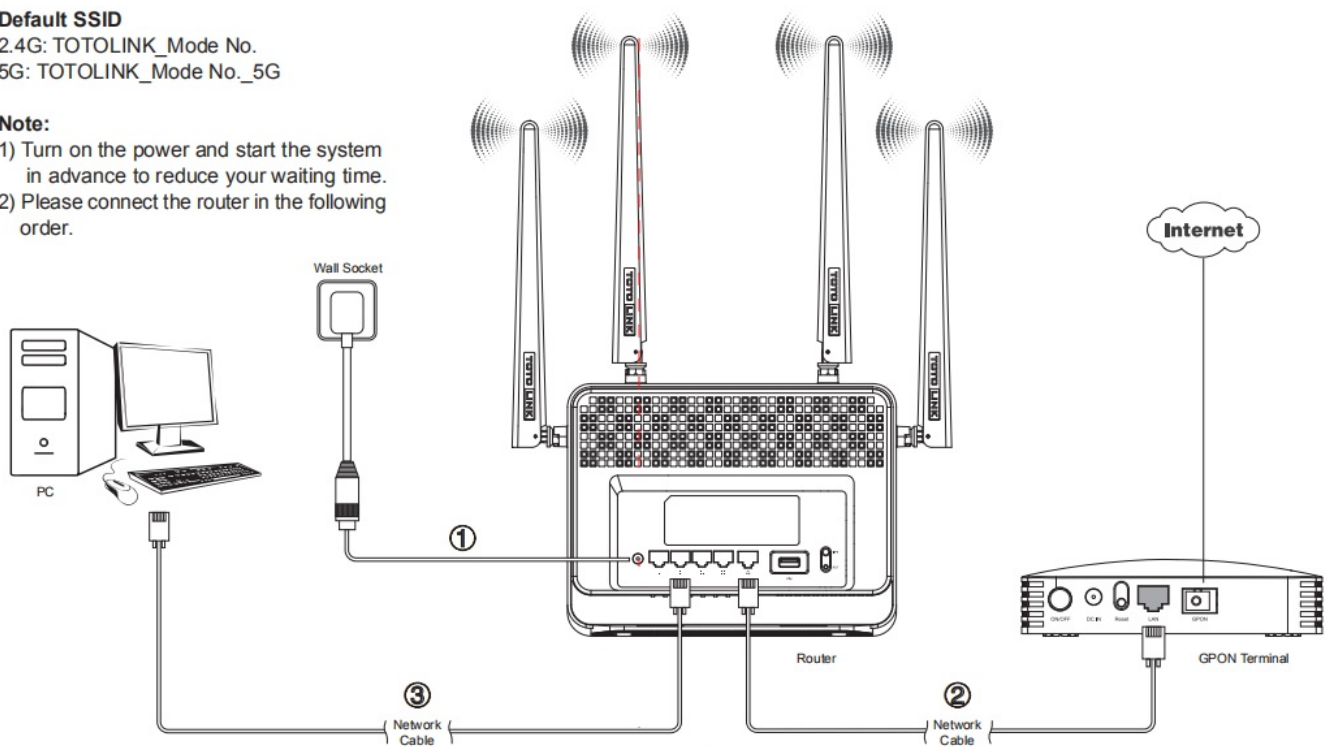

Interface


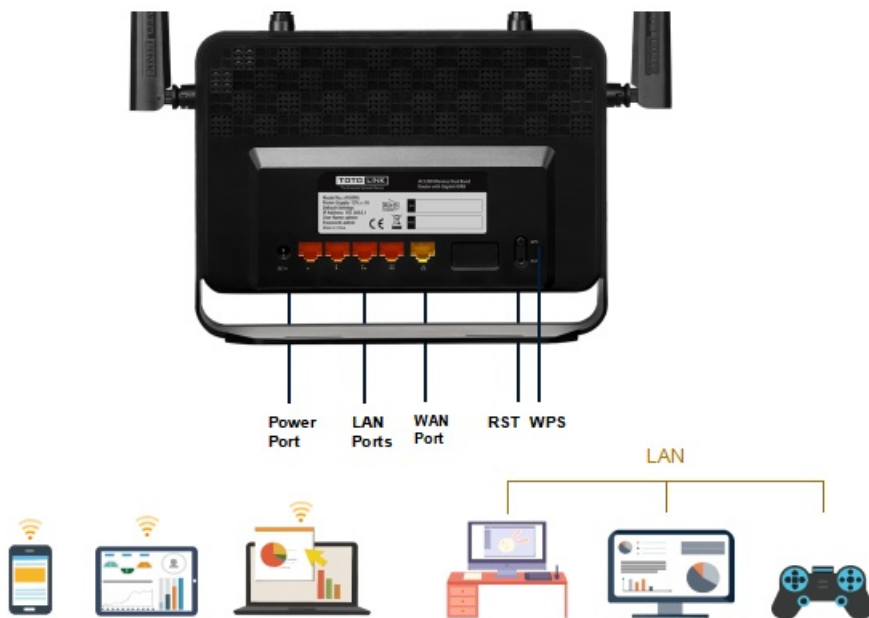


Diagram Method One: login via tablet/Cellphone

STEP-1:

Activate the WLAN function on your Phone and connect to TOTOLINK_A3700R Or TOTOLINK_A3700R_5G . Then run any Web browser and enter <http://itotolink.net> in the address bar.

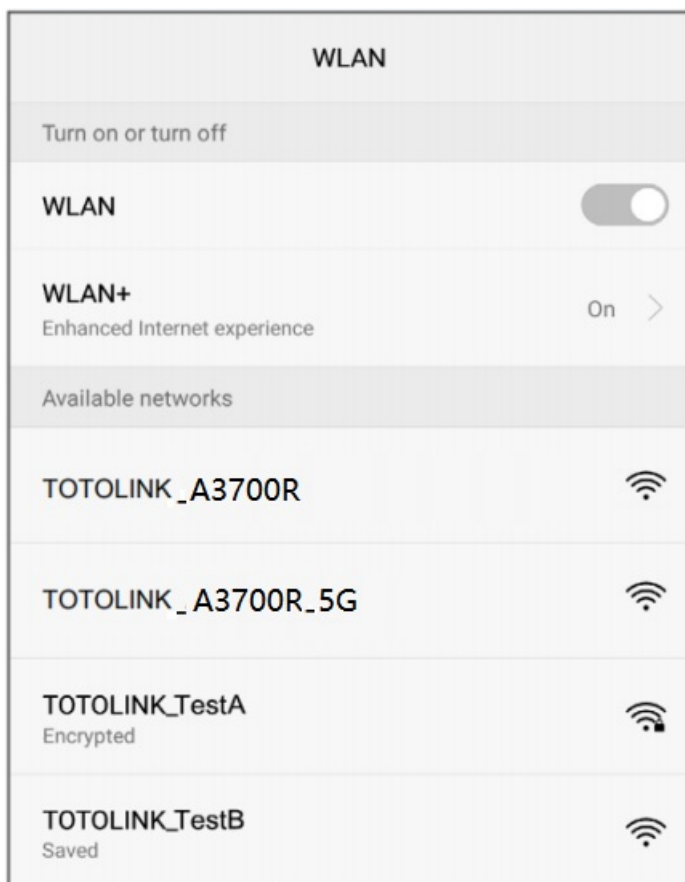


STEP-2:


Enter admin for the password and then click LOGIN.

itotolink.net/phone/login.htm 1

Auto >



Administrator Login


 Please enter password

Forgot password?

LOGIN


STEP-3:

Click Quick Setup.

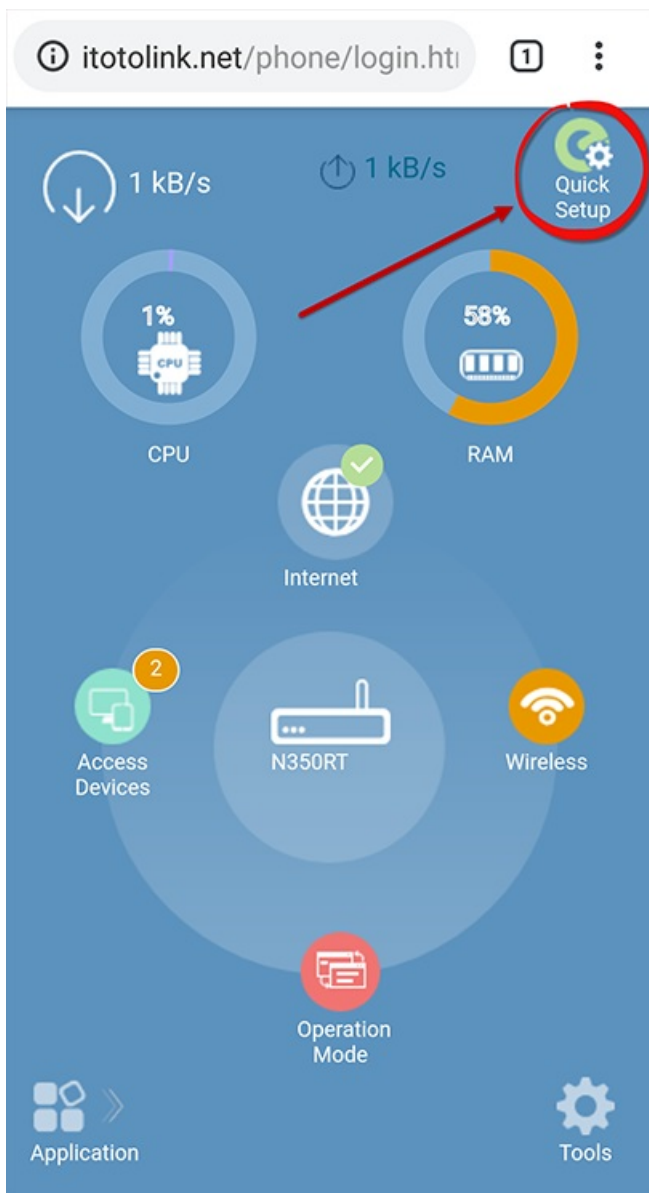


STEP-4:

Time Zone setting. According to your location, please click the Time Zone to choose a correct one from the list, then click Next.

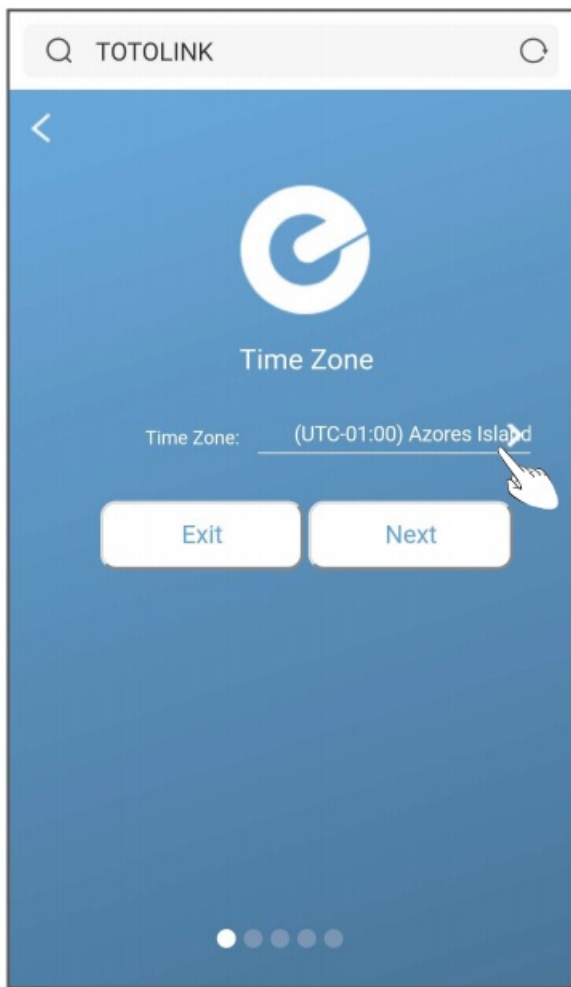

STEP-5:

Internet Setting. Choose a suitable connection type from the list and fill in the information required, then click Next.

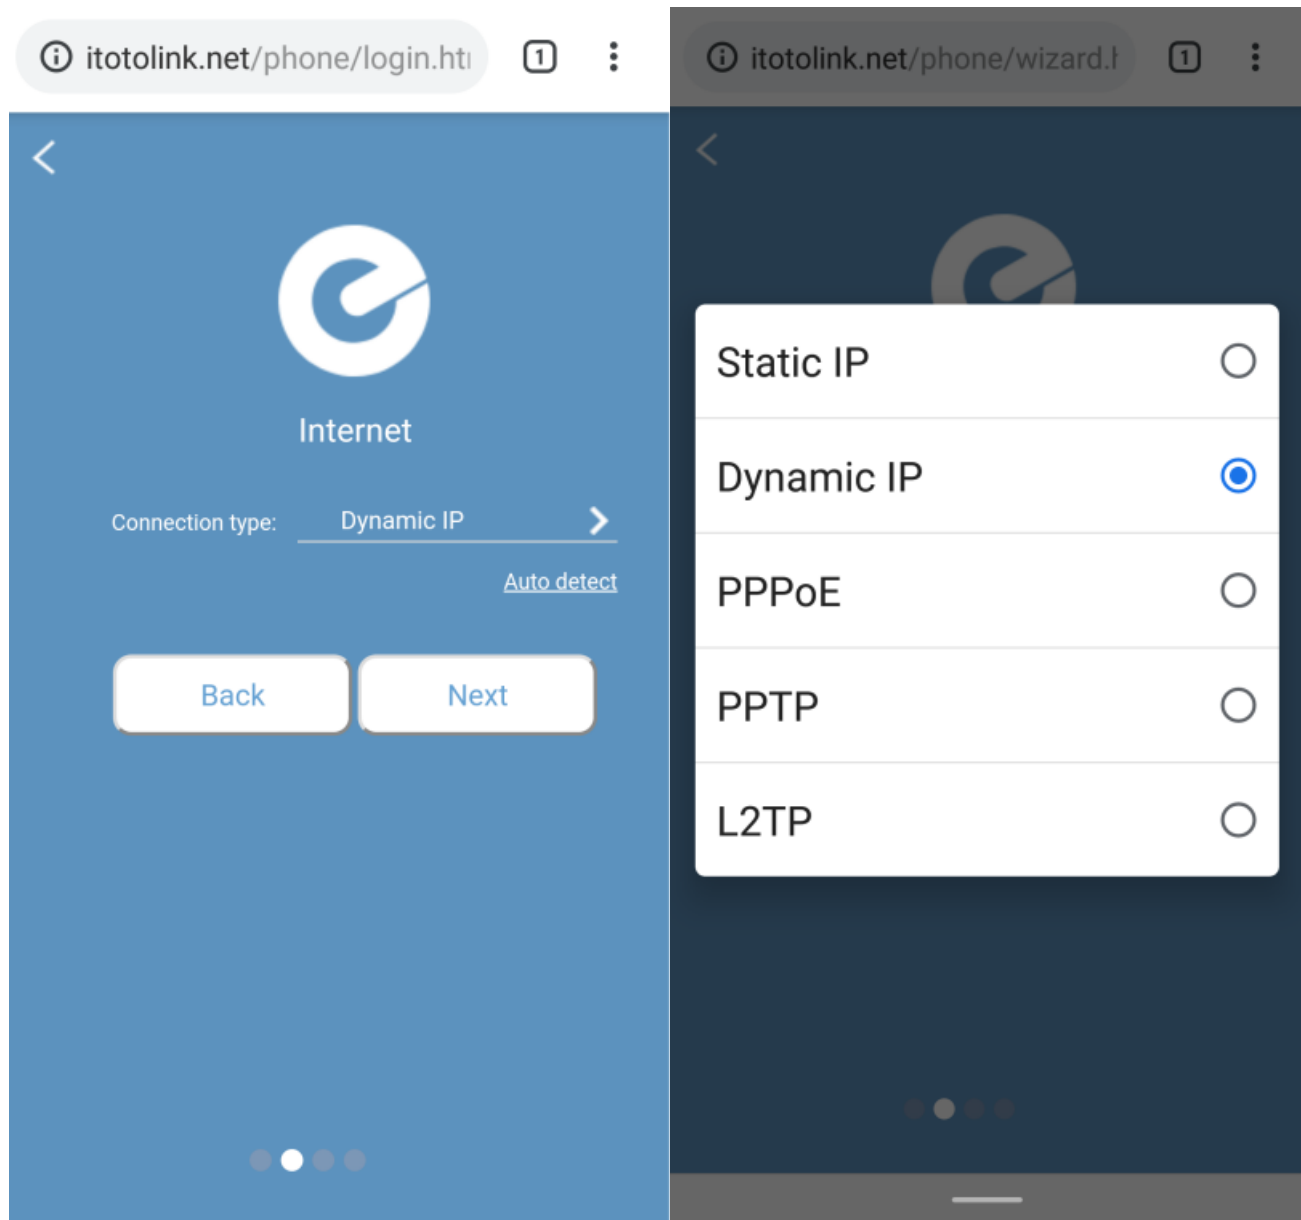

STEP-6:

Wireless Setting. Create passwords for 2.4G and 5G Wi-Fi (Here users could also revise the default Wi-Fi name) and then click Next.

itotolink.net/phone/login.htm 1

<

Radio On/Off 5GHz (1): ☒

Network name(SSID): TOTOLINK

Password:

Hide SSID: ☐

Radio On/Off 5GHz (2): ☒

Network name(SSID): TOTOLINK

Password:


Hide SSID: ☐

Back Next

● ● ● ● ●


STEP-7:

For security, please create a new Login Password for your router, then click Next.

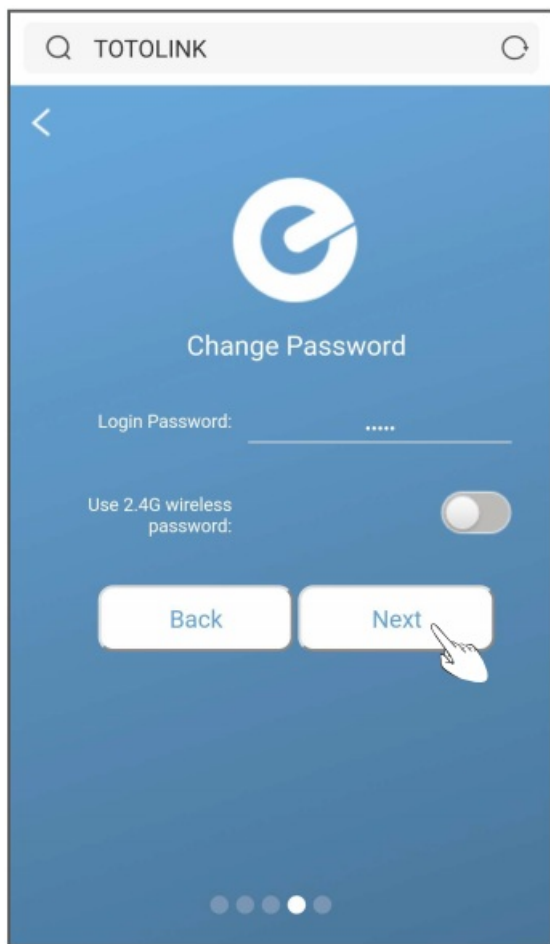


STEP-8:

The coming page is the Summary information for your setting. Please remember your Wi-Fi Name and Password, then click Done.

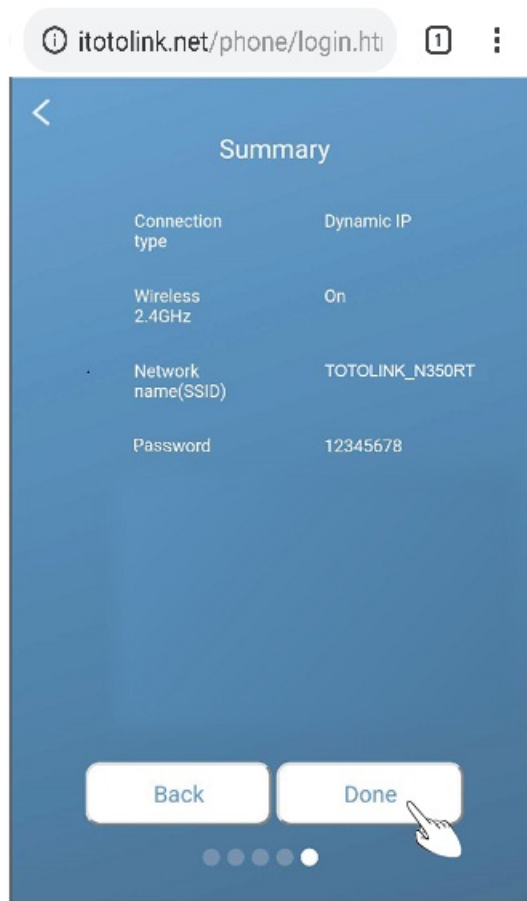


STEP-9:

It takes several seconds to save the settings and then your router will restart automatically. This time your Phone will be disconnected from the router. Please back to the WLAN list of your phone to choose the new Wi-Fi name and input the correct password. Now, you could enjoy the Wi-Fi.

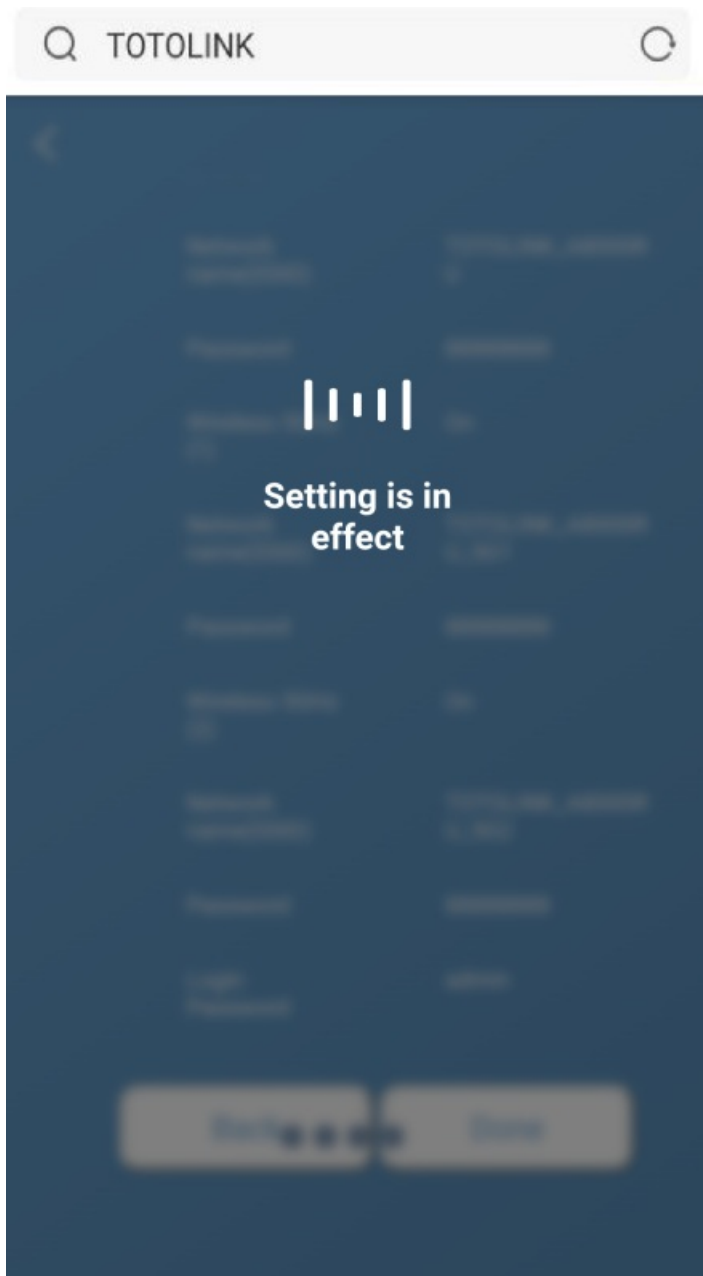


STEP-10:

More features: Click Application.

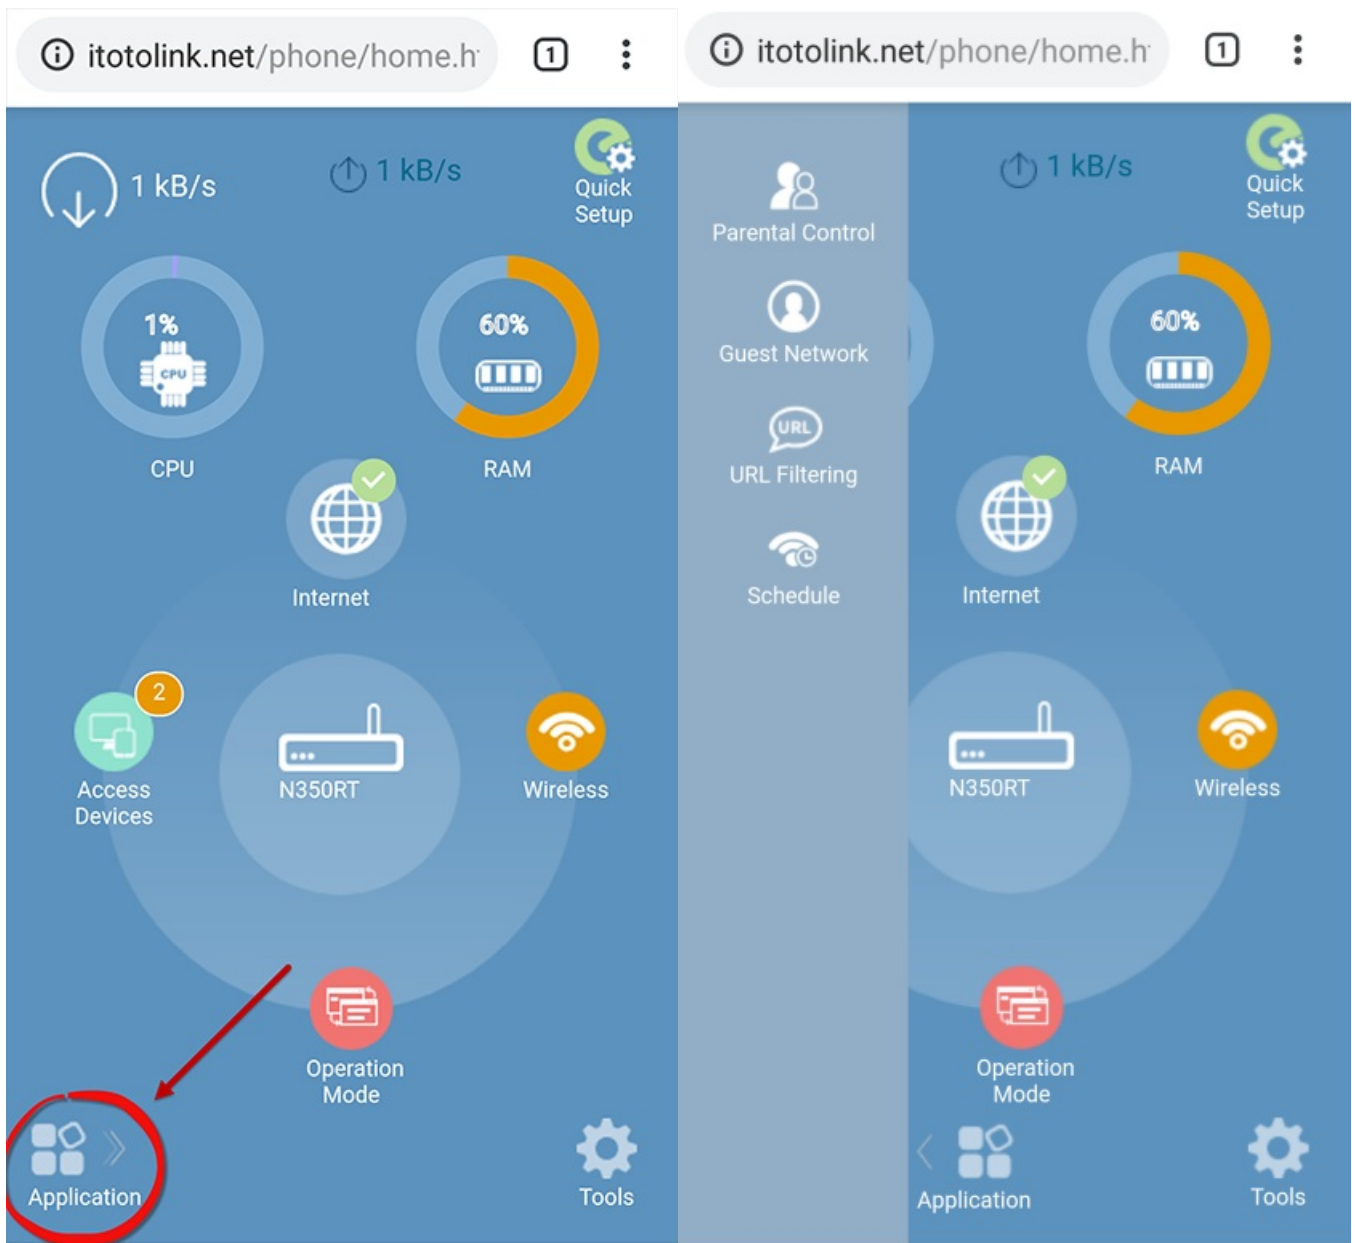


STEP-11:

More features: Click Tools.

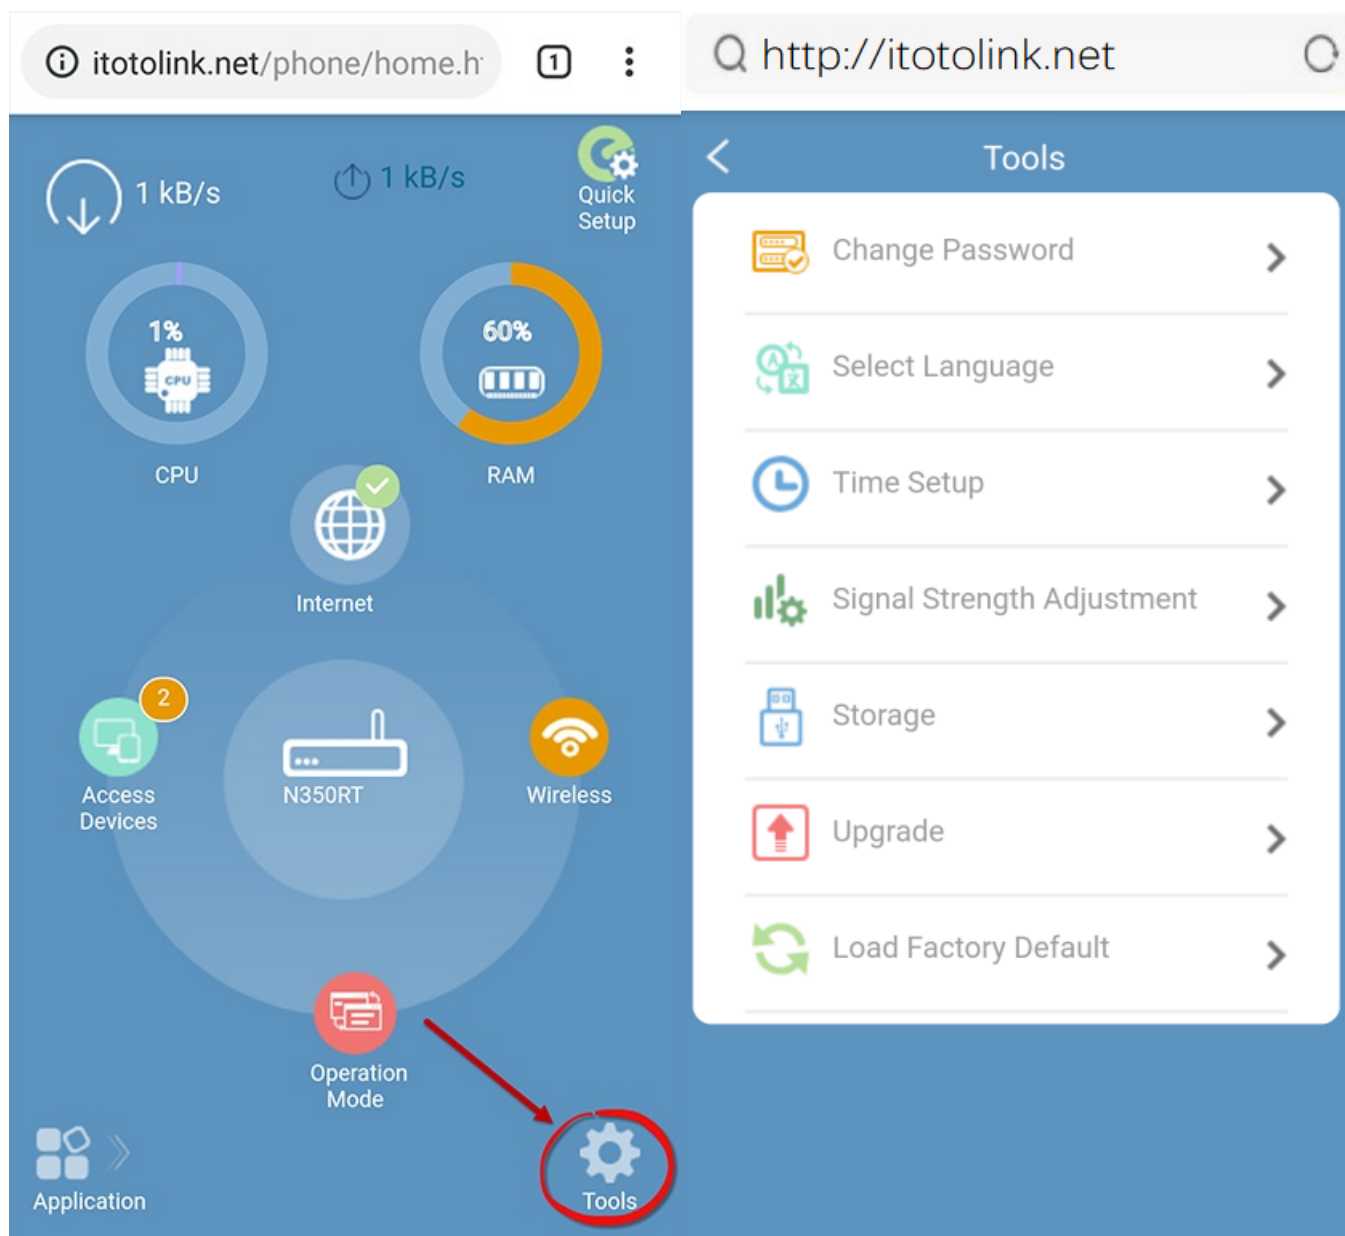

STEP-12:

More features: Click PC.

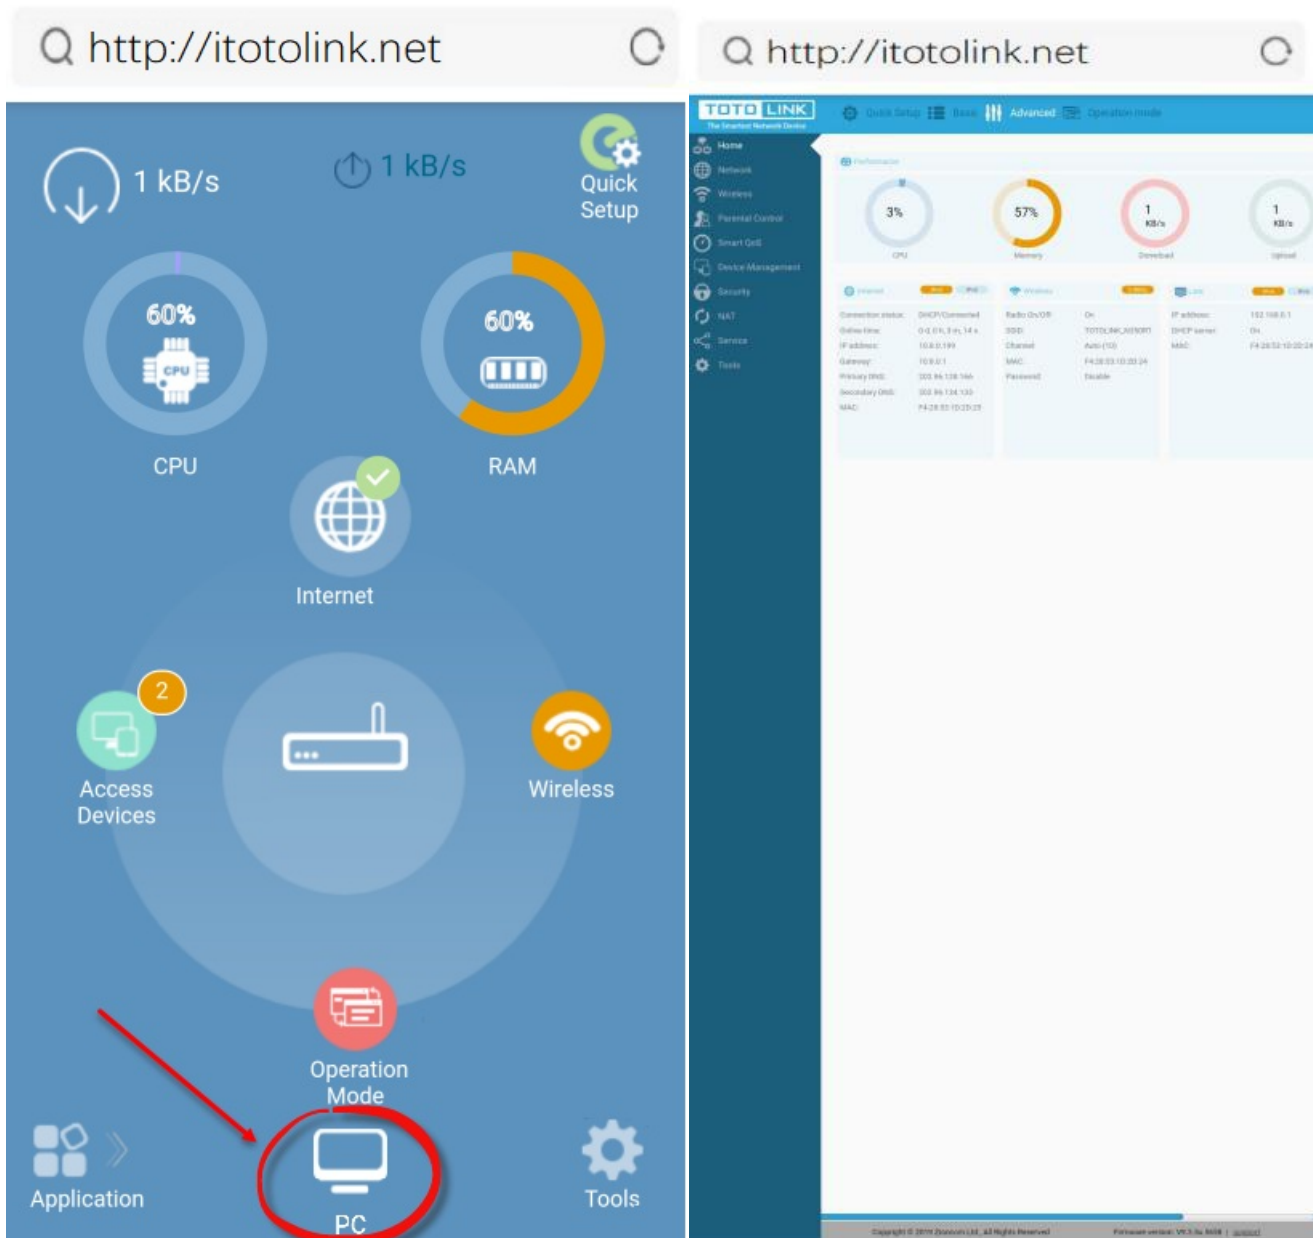


2 Method Two: login via PC

STEP-1:

Connect your computer to the router by cable or wireless. Then run any Web browser and enter <http://itotolink.net> in the address bar.


STEP-2:

Enter admin for the password and then click LOGIN.

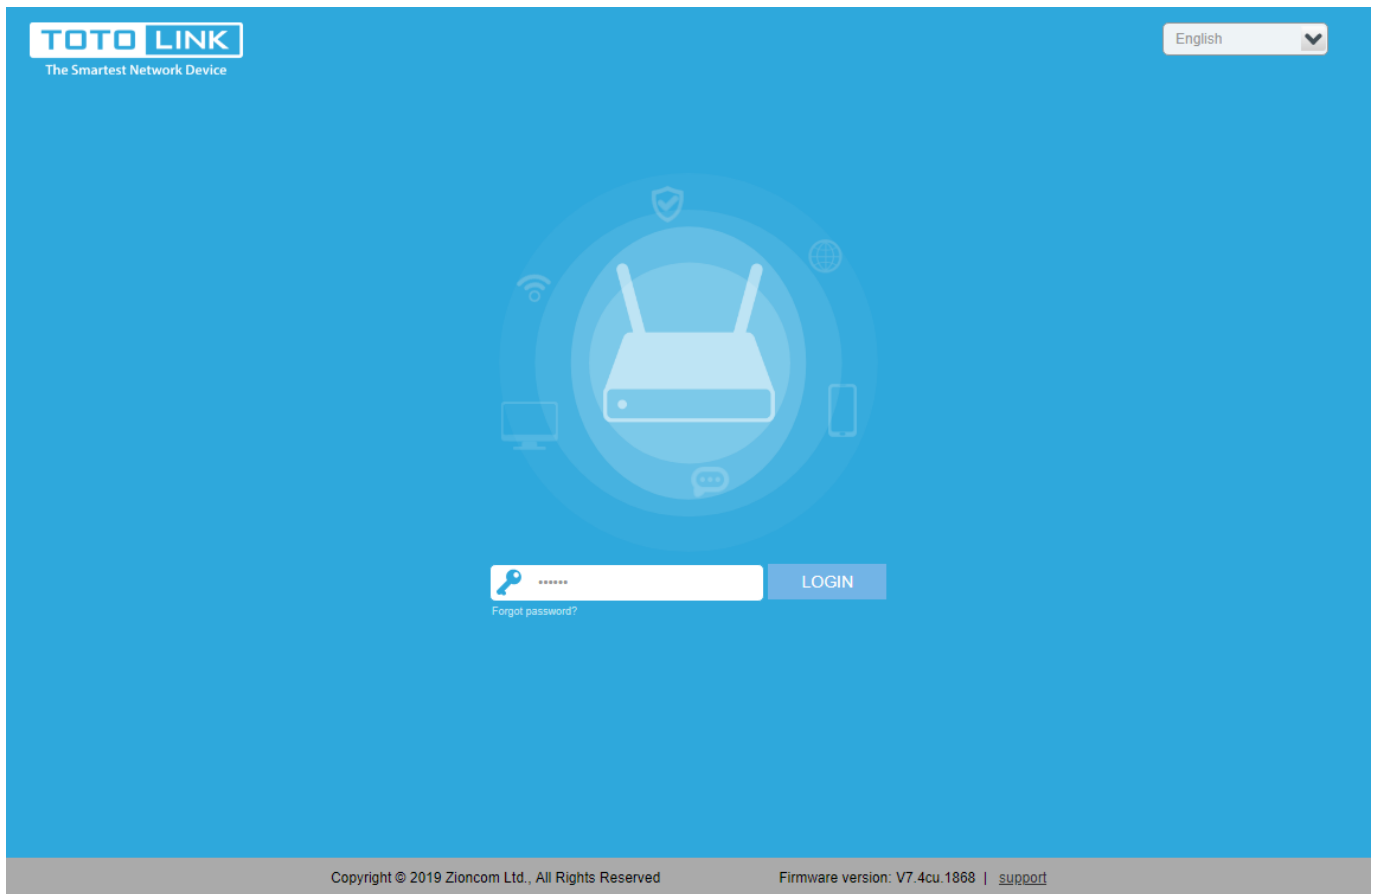

STEP-3:

Click Quick Setup.

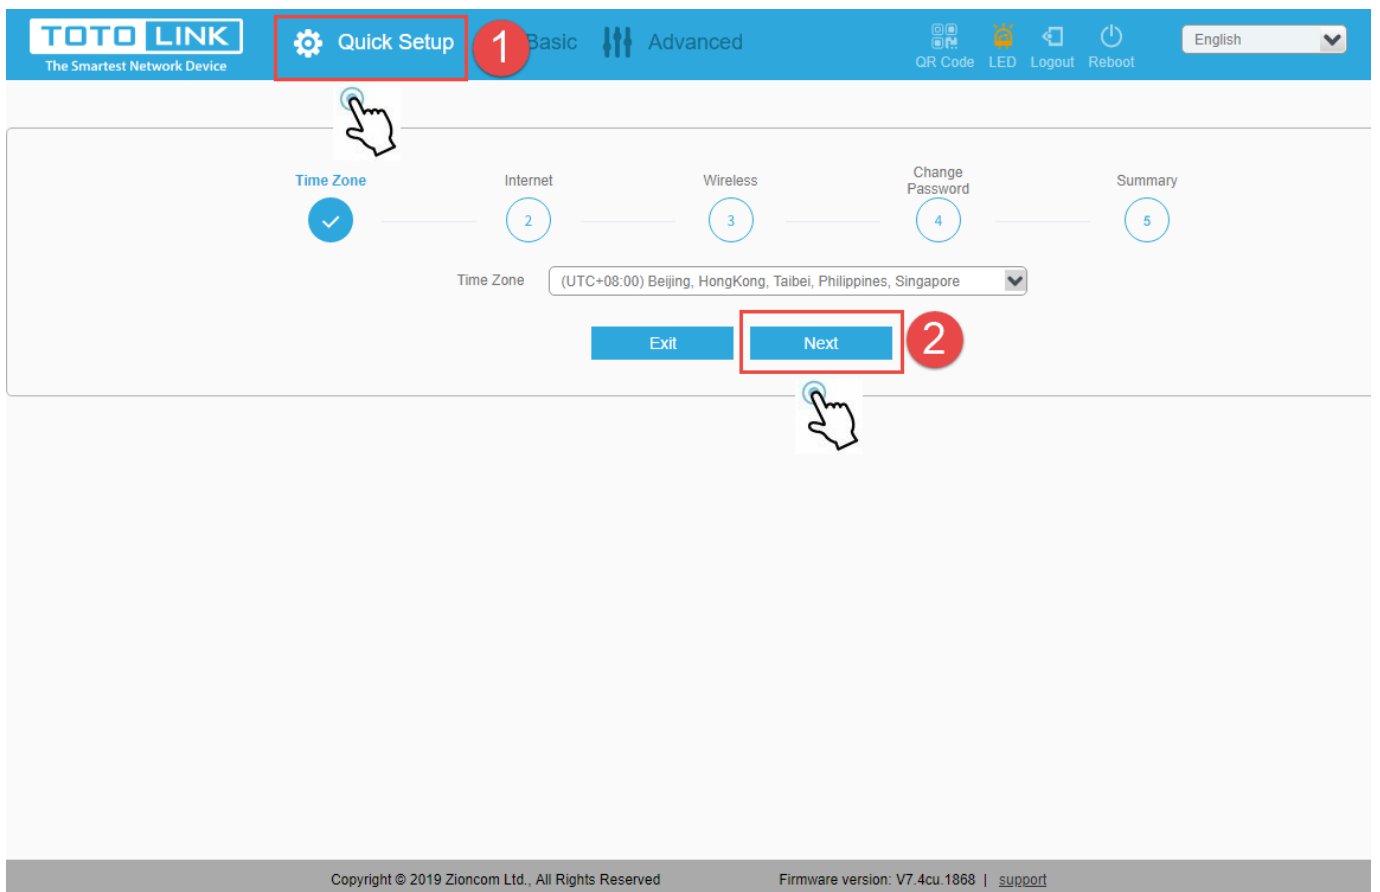

Time Zone

Internet

Wireless

Change Password

Summary

☒ Dynamic IP

☐ Static IP

☐ PPPoE

☐ PPTP

☐ L2TP

If your ISP only allows internet access to a specific MAC address, you need to clone the MAC address. If you are not sure, select 'Use default MAC address'.

☒ Use default MAC address

☐ Clone PC's MAC address

MAC address

F4:28:53:19:A4:69

Back

Auto detect

Next

3

Copyright © 2019 Zioncom Ltd., All Rights Reserved

Firmware version: V7.4cu.1868 | [support](#)

Time Zone

Internet

Wireless

Change Password

Summary

☐ Wireless multi-frequency integration

Wireless 2.4GHz

Radio On/Off

Network name(SSID)

Password

☐ Hide

Wireless 5GHz

Radio On/Off

Network name(SSID)

Password

☐ Hide

Back

Next

4

Copyright © 2019 Zioncom Ltd., All Rights Reserved

Firmware version: V7.4cu.1868 | [support](#)

TOTO LINK

The Smartest Network Device

Quick Setup

Basic

Advanced

QR Code

LED

Logout

Reboot

English

Time Zone

Internet

Wireless

Change Password

Summary

✓

✓

✓

✓

5


Login Password

☐ Use 2.4G wireless password

Back

Next

5



Copyright © 2019 Zioncom Ltd., All Rights Reserved

Firmware version: V7.4cu.1868 | [support](#)

TOTO LINK

The Smartest Network Device

Quick Setup

Basic

Advanced

QR Code

LED

Logout

Reboot

English

Time Zone

Internet

Wireless

Change Password

Summary

✓

✓

✓

✓

✓

Connection type:

Dynamic IP

Wireless 2.4GHz: On

Network name(SSID):

Wireless 5GHz : On


Network name(SSID):

Login Password: *****

Back

Done

6



Copyright © 2019 Zioncom Ltd., All Rights Reserved

Firmware version: V7.4cu.1868 | [support](#)

DOWNLOAD

Manuals+.