

A702R Quick Installation Guide


Contents

- [1 A702R Quick Installation Guide](#)
- [2 Installation Diagram](#)
- [3 DiagramMethod One: login via tablet/Cellphone](#)
- [4 Method Two: login via PC](#)
- [5 Related Posts](#)


A702R Quick Installation Guide

It is suitable for: **A702R**

Installation Diagram

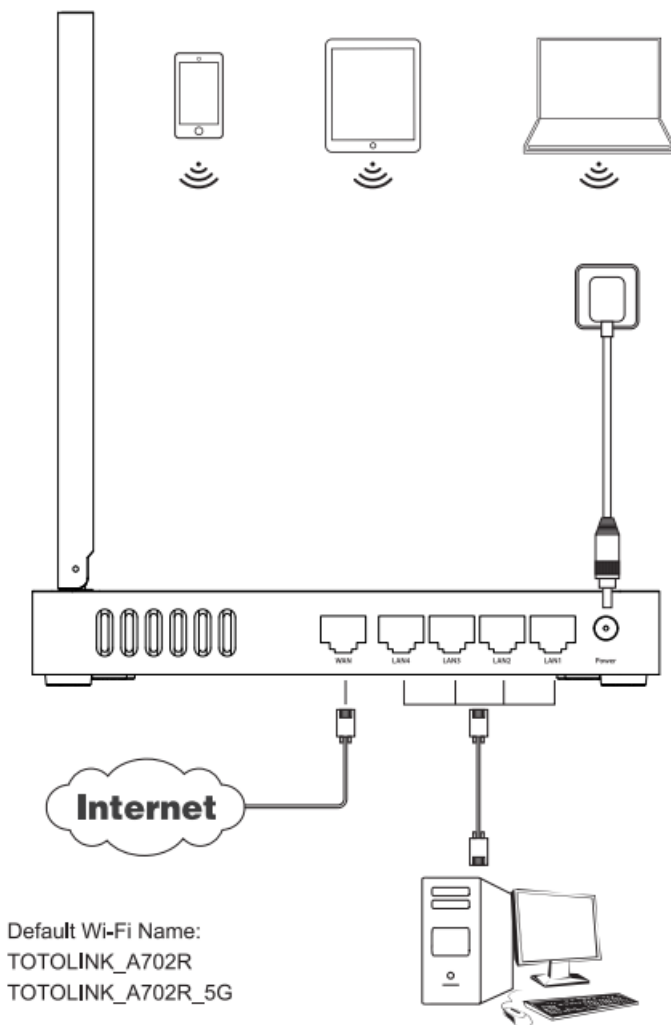


Interface

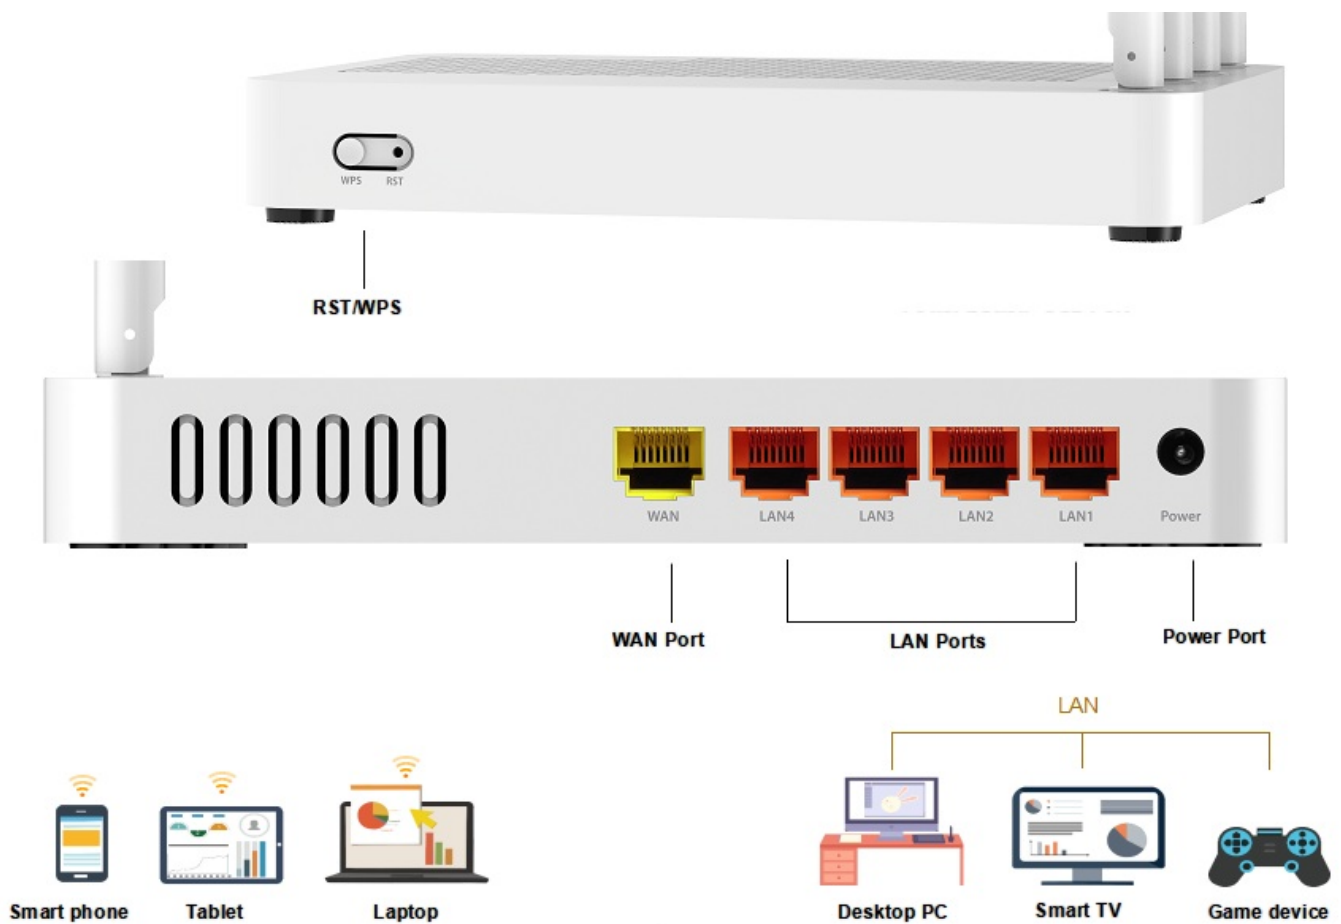

DiagramMethod One: login via tablet/Cellphone

STEP-1:


Find TOTOLINK_A702R or TOTOLINK_A702R_5G on the WLAN list of your Phone, and choose to connect. Then any Web browser on your Phone and enter <http://itotolink.net> on the address bar.

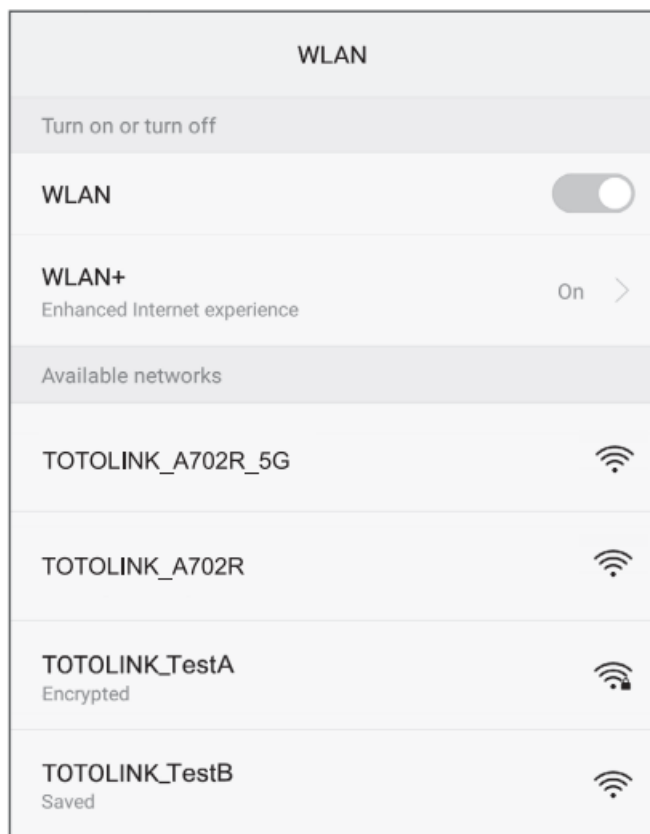

STEP-2:

Input admin for both User Name and Password on the coming page, then click Login.


http://itotolink.net




The Smartest Network Device

Welcome

User Name

 admin

Password



[Forgot Password](#)

LOGIN

STEP-3:

Click Quick Setup on the coming page.

http://itotolink.net



TOTOLINK Router Setting

Model:

F/W Version:



Quick Setup



Advanced Setup

STEP-4:

Internet Setting. Choose a suitable WAN Connection type from the list, and fill in the information required.

* WAN Setting

PPPoE

Dynamic IP

Static IP

Please enter User Name and Password provided by your ISP

User Name

Password

Back

Next

* WAN Setting

PPPoE

Dynamic IP

Static IP

WAN Status

IP Address

Subnet
Mask

Gateway

DNS Server

Back

Next

* WAN Setting

PPPoE

Dynamic IP

Static IP

Please complete below information

IP Address

Subnet
Mask

Gateway

DNS Server

Back

Next

STEP-5:

Wireless Setting. Create passwords for 2.4G and 5G Wi-Fi (Here users could also revise the default Wi-Fi name) and then click Next.

http://itotolink.net



* Wi-Fi Setting

2.4G Wi-Fi

SSID

TOTOLINK

Wi-Fi Password



The Password length should be between 8-63 bits

5G Wi-Fi

SSID

TOTOLINK

Wi-Fi Password




The Password length should be between 8-63 bits

Back

Finish

STEP-6:

It takes several seconds to save the settings and then your router will restart automatically. This time your Phone will be disconnected from the router. Please back to the WLAN list of your phone to choose the new Wi-Fi name and input the correct password. Now, you could enjoy the Wi-Fi.

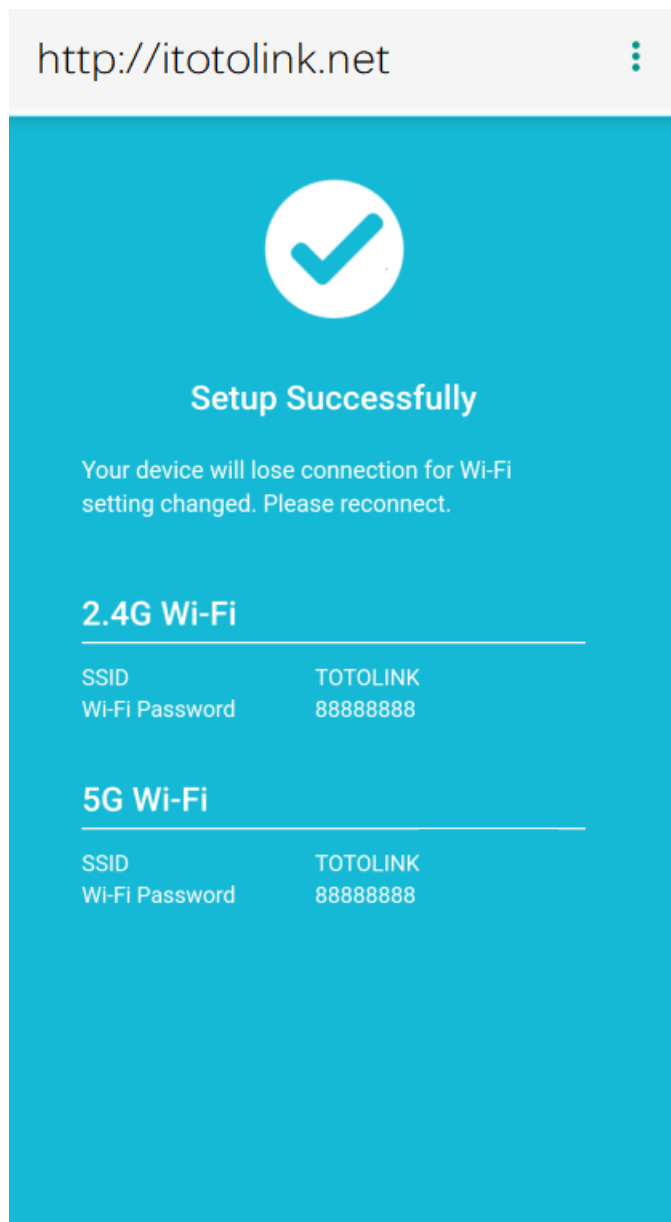

Method Two: login via PC

STEP-1:



Connect your computer to the router by cable or wireless. Then run any Web browser and enter <http://itotolink.net> in the address bar.

STEP-2:

Set a new login password for the device, it is recommended to set the password with alphanumeric characters and then press Install.

New Login Password

[Skip](#)

	New Password	Length range is 6-15
	Confirm Password	Length range is 6-15
<div></div>		
<div>Set Up</div>		




Note: Set a new login password to prevent the router from being compromised

STEP-3:

Enter admin for User name, then enter new password in step 2 or admin, type the verification code then press LOGIN.


USER LOGIN

[Forget Password?](#)

	User Name	admin
	Password
	Verification Code	1JRP
		<div>1JRP</div>
<div>Login</div>		

STEP-4:

Click on “Auto Detect” to detect the Wan Type in your network.

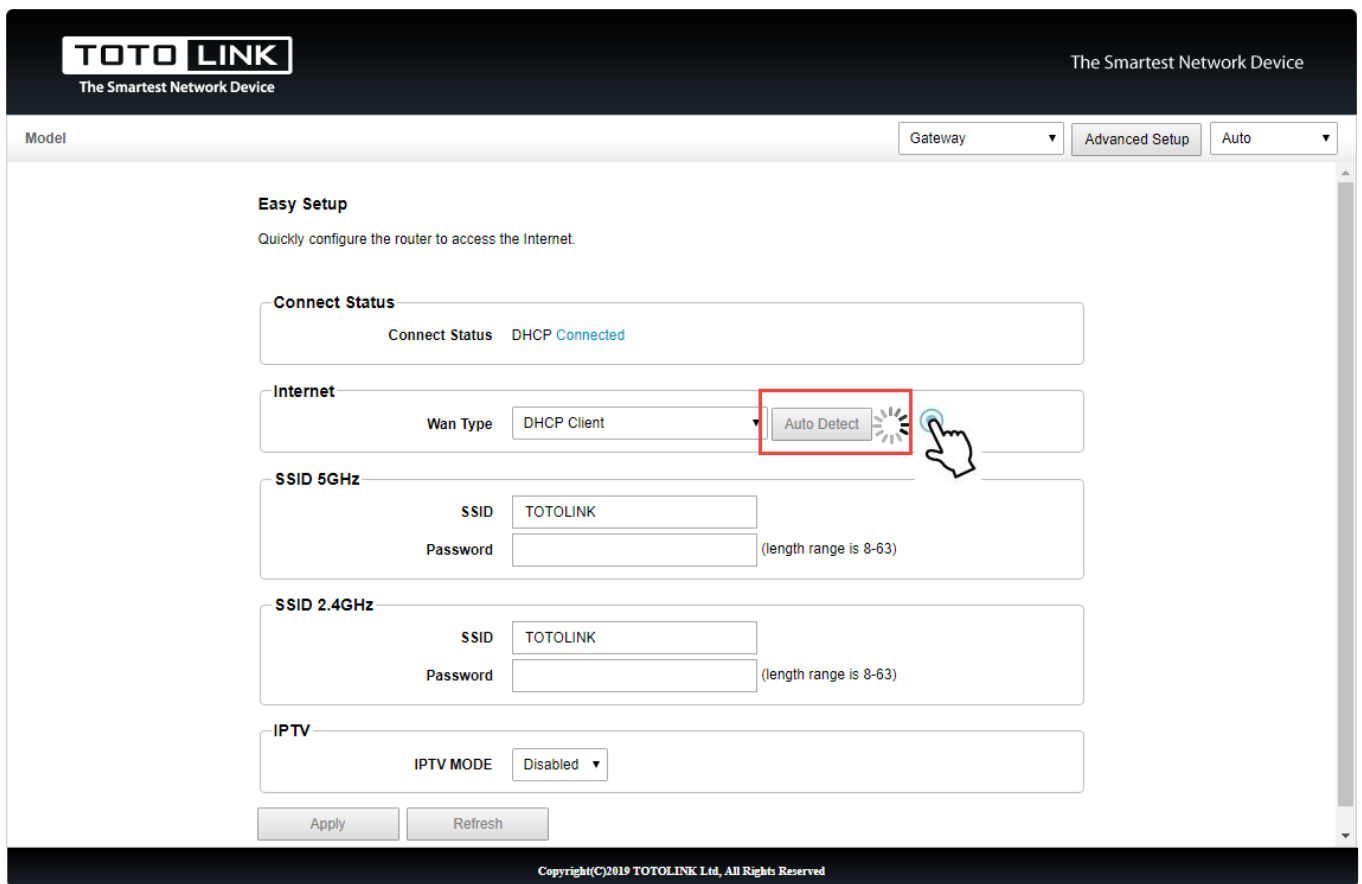

The screenshot displays the TOTO LINK web interface for the 'Easy Setup' page. The header includes the TOTO LINK logo and the tagline 'The Smartest Network Device'. Below the header, there are tabs for 'Gateway', 'Advanced Setup', and 'Auto'. The main content area is titled 'Easy Setup' and includes a sub-header 'Quickly configure the router to access the Internet.'.

The 'Connect Status' section shows 'Connect Status' as 'DHCP Connected'. The 'Internet' section has a 'Wan Type' dropdown set to 'DHCP Client'. A red rectangular box highlights the 'Auto Detect' button, which is accompanied by a circular loading icon. A hand cursor is positioned over the 'Auto Detect' button, indicating it is the target for a click. Below the 'Internet' section, there are two sections for wireless settings: 'SSID 5GHz' and 'SSID 2.4GHz'. Each section contains an 'SSID' field (both set to 'TOTOLINK') and a 'Password' field (both with a note '(length range is 8-63)'). The 'IPTV' section at the bottom has an 'IPTV MODE' dropdown set to 'Disabled'.

At the bottom of the form, there are 'Apply' and 'Refresh' buttons. The footer of the page contains the copyright notice: 'Copyright(C)2019 TOTOLINK Ltd, All Rights Reserved'.

STEP-5:

Now you can see the Easy Setup page. All basic settings could be done here, including Internet Settings and Wireless Settings.

Model

Gateway ▾

Advanced Setup

Auto ▾

Easy Setup

Quickly configure the router to access the Internet.

Connect StatusConnect Status DHCP **Connected****Internet**

Wan Type DHCP Client ▾

Auto Detect

SSID 5GHz

SSID TOTOLINK

Password 88888888 (length range is 8-63)

SSID 2.4GHz

SSID TOTOLINK

Password 88888888 (length range is 8-63)

IPTV

IPTV MODE Disabled ▾

Apply

Refresh

Copyright(C)2019 TOTOLINK Ltd, All Rights Reserved

DOWNLOAD

A702R Quick Installation Guide – [[Download PDF](#)]